

EL 125 E2M 01


122230

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust AC motor, 3-steps controllable
- Conveyed medium temperature up to 80 °C in continuous operation
- Housing made of polyamide



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

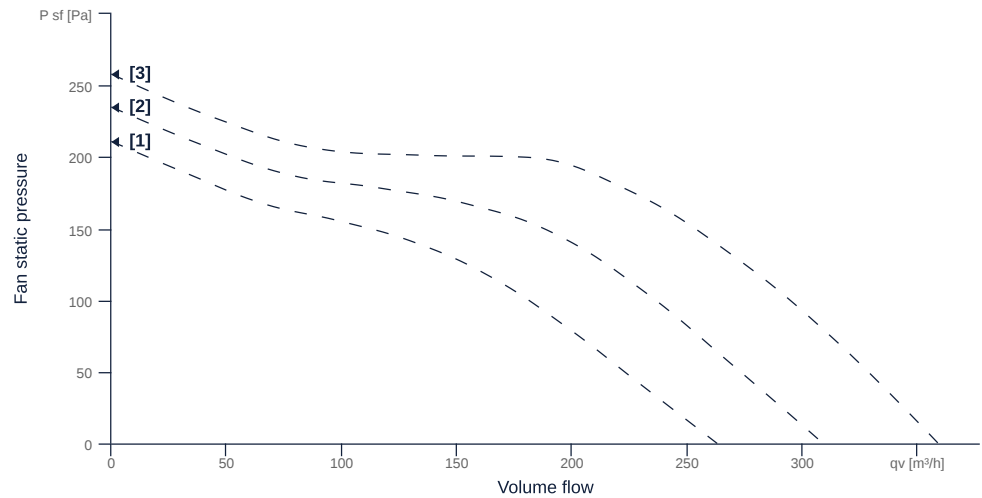

to the product detail page

EL 125 E2M 01

122230

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN125		DN
Rated voltage (entire device)	230	V	U_{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
Weight	2.18	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	52	W	$P_{ed, max}$
Max. operating current (device)	0.24	A	$I_{ed, max}$
Max. speed	2840	1/min	n_{max}
Max. stat. efficiency	20.5	%	η_{es}
Max. fan efficiency	22.3	%	η_e
Max. flowrate	360	m ³ /h	Q_v, max
Max. stat pressure	260	Pa	$p_{sf, max}$
Max. medium temperature	80	°C	T_m, max
Max. environment temperature	80	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$
Min. voltage	230	V	U_{min}
Stall current	0.86	A	I_{LRA}



EL 125 E2M 01

122230

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		step-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		1.5	µF	Ccond
Voltage capacitor		450	V	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Rated current	0.3		A	Irated, f1
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2770	1/min	nopt
Efficiency level	24.3	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.05	kW	Pe, opt
Overall efficiency	48.5	%	ηges
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	183	Pa	pft, opt
Flowrate at energy efficiency optimum	217	m³/h	Qv, opt


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

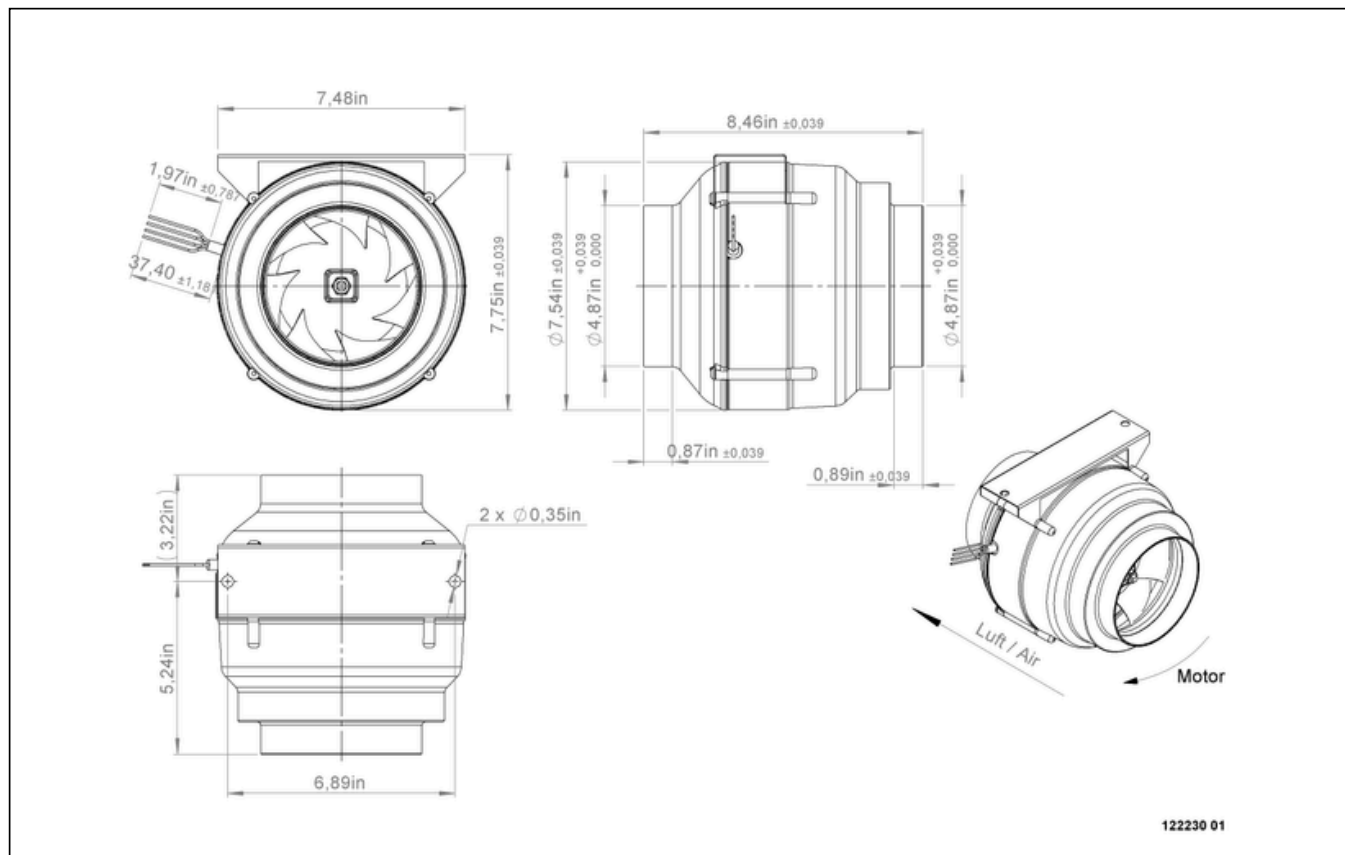

EL 125 E2M 01

122230

ruck

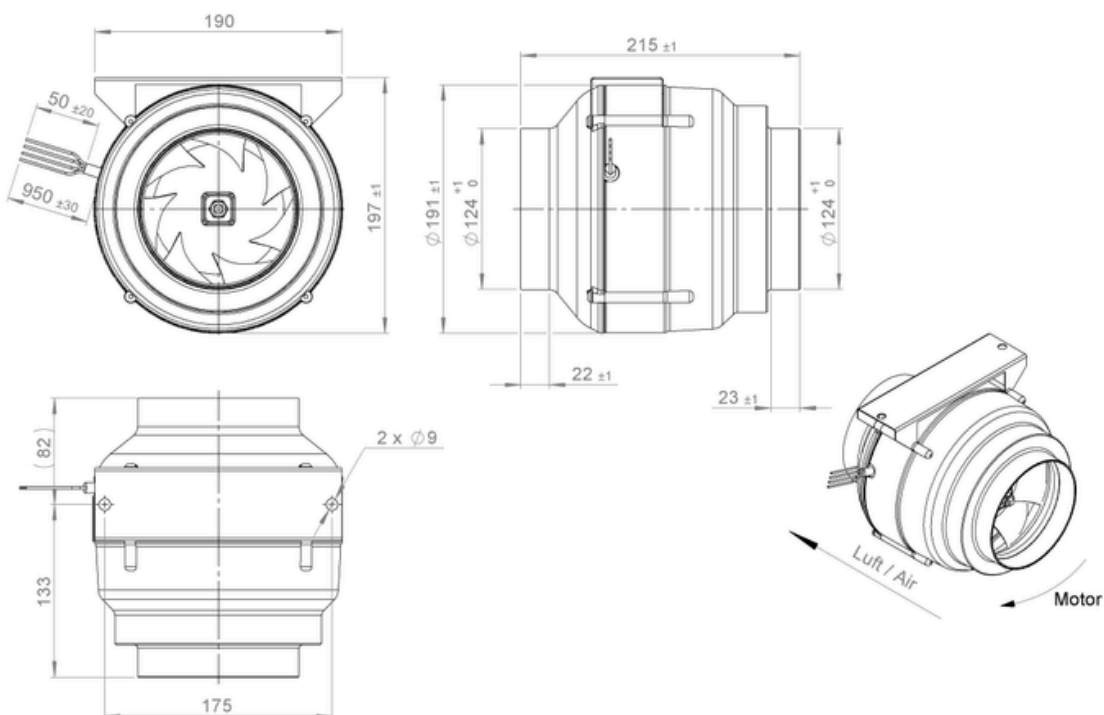

122230 01




to the product detail page

EL 125 E2M 01

122230


ruck

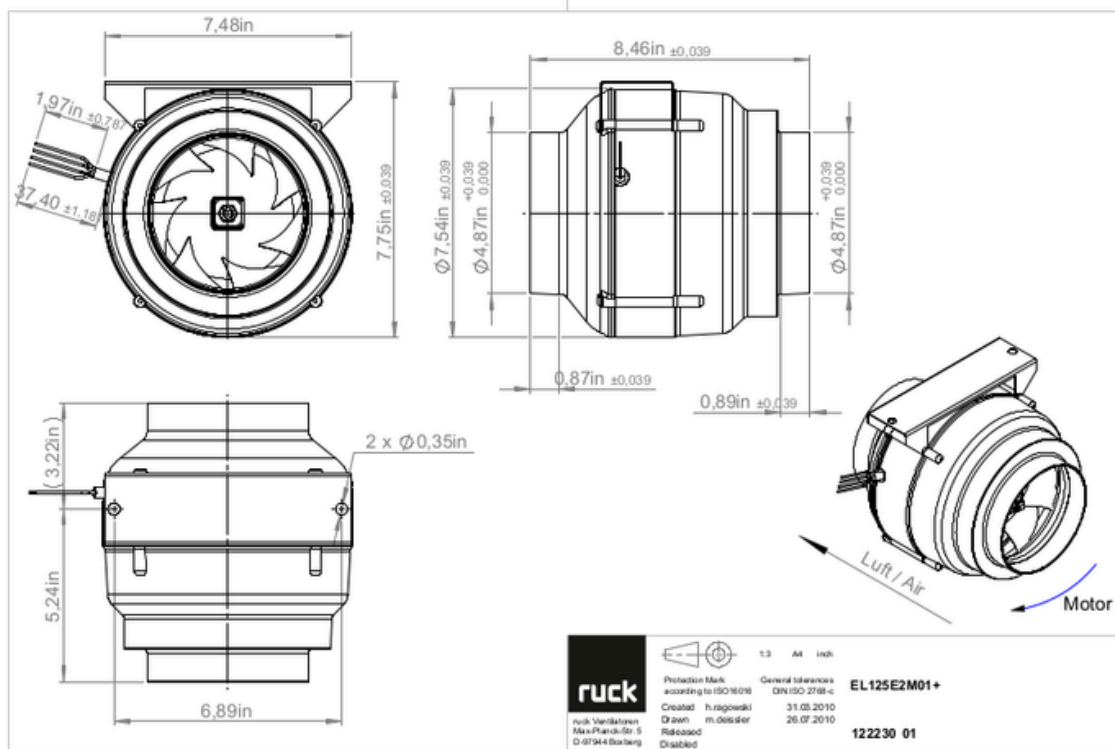

EL 125 E2M 01

122230


ruck

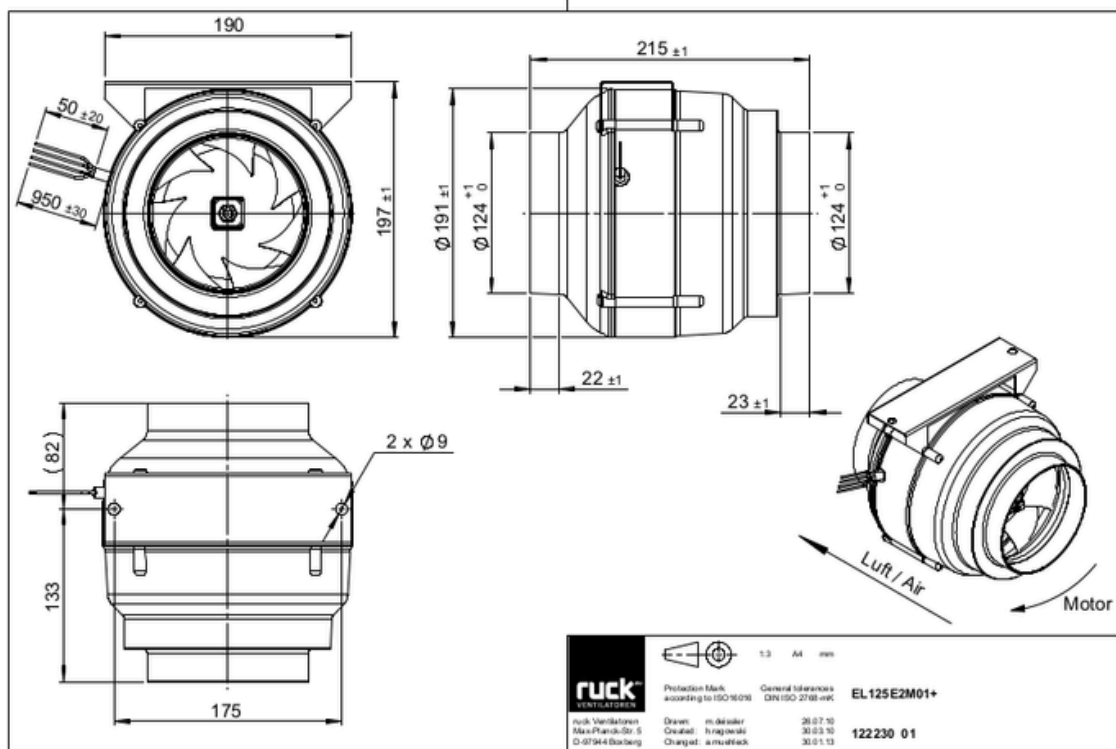

EL 125 E2M 01

122230


ruck

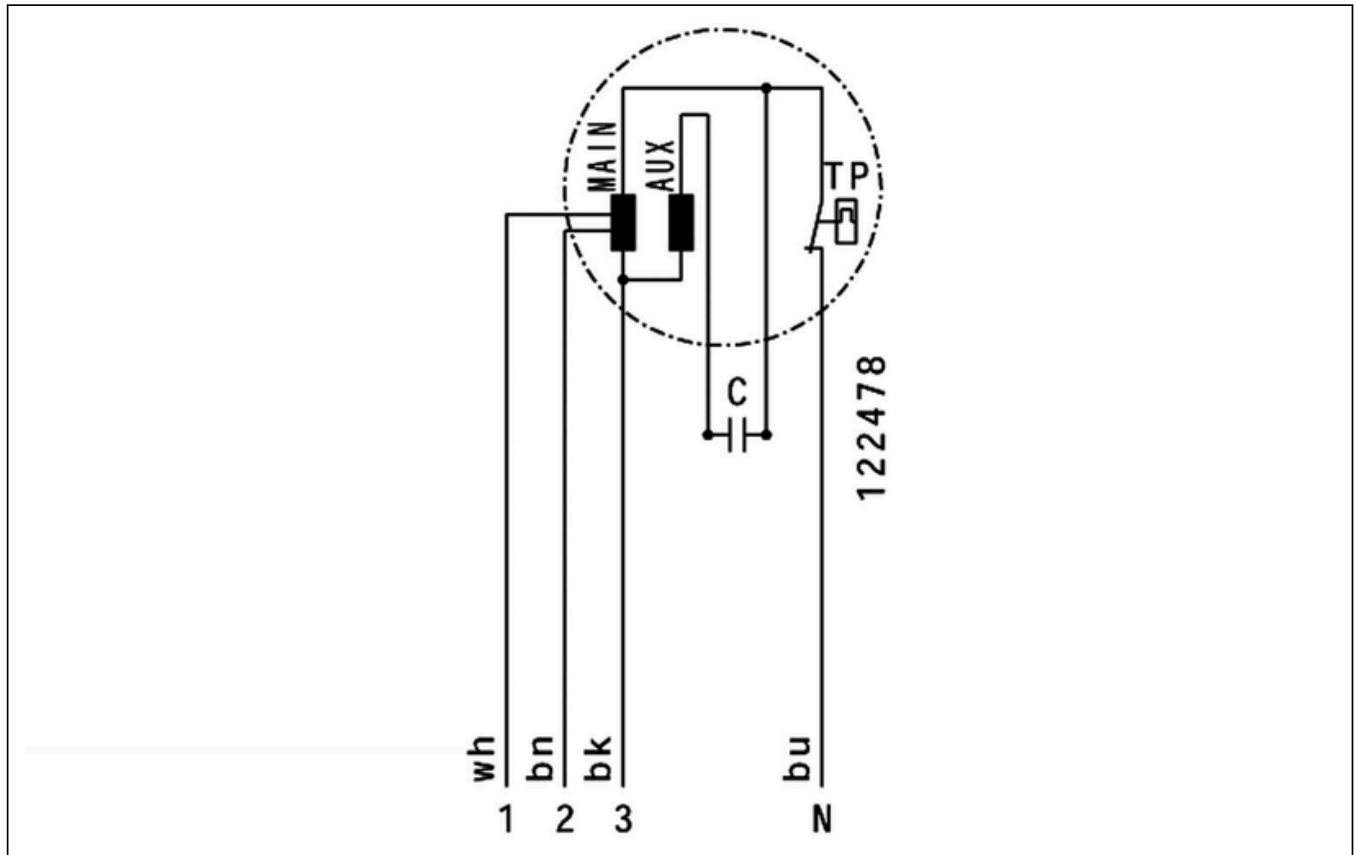

to the product detail page

MECHANICAL ACCESSORIES

FV 125 | 112679



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 125 | 112843



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 125 | 112850




- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 125 | 102179



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

SG 125 01 | 102895



- Protection grille for tube connection
- Galvanized wire

VM 125 | 102647



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

RSK 125D | 113483



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

SDS 125 | 169603



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 125 | 169640



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, Imax = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature 50 °C
- Surface and flush mounting
- IP 44



to the product detail page