

EL 150L E2M 01


122228

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust AC motor, 3-steps controllable
- Conveyed medium temperature up to 50 °C in continuous operation
- Housing made of polyamide



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

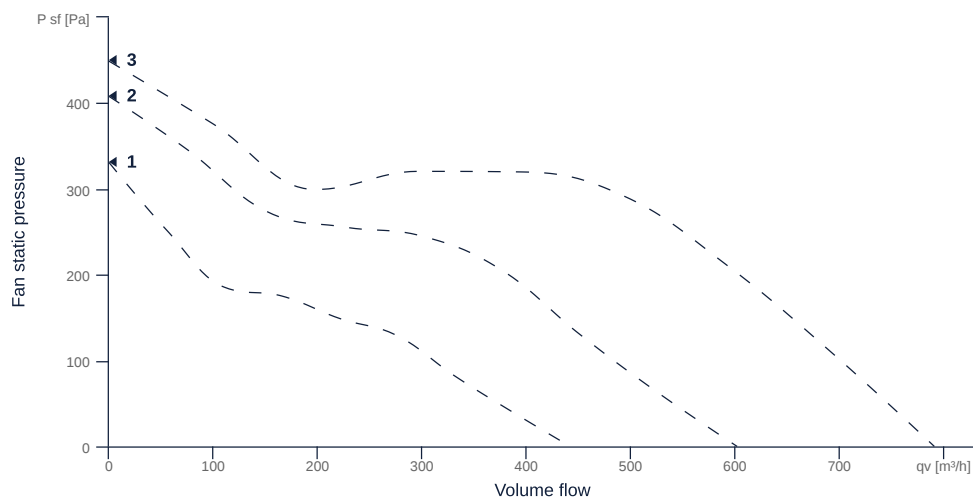

to the product detail page

EL 150L E2M 01

122228

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN150		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
Weight	3.4	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	130	w	P _{ed, max}
Max. operating current (device)	0.64	A	I _{ed, max}
Max. speed	2870	rpm	n _{max}
Max. stat. efficiency	31.7	p	η _{es}
Max. fan efficiency	35	p	η _e
Max. flowrate	790	CmH	Q _{v, max}
Max. stat pressure	445	Pa	p _{sf, max}
Max. medium temperature	50	°C	T _{m, max}
Max. environment temperature	50	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	230	v	U _{min}



to the product detail page

EL 150L E2M 01

122228



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		step-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		3.5	µF	Ccond
Voltage capacitor		450	v	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		v	Urated, f1
Rated current	0.5		A	Irated, f1
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2645	rpm	n _{opt}
Efficiency level	30.9	p	N
Efficiency category	statisch		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	0.12	kw	P _{e, opt}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	293	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	483	CmH	Q _{v, opt}


SMOKE EXTRACT DATA


Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

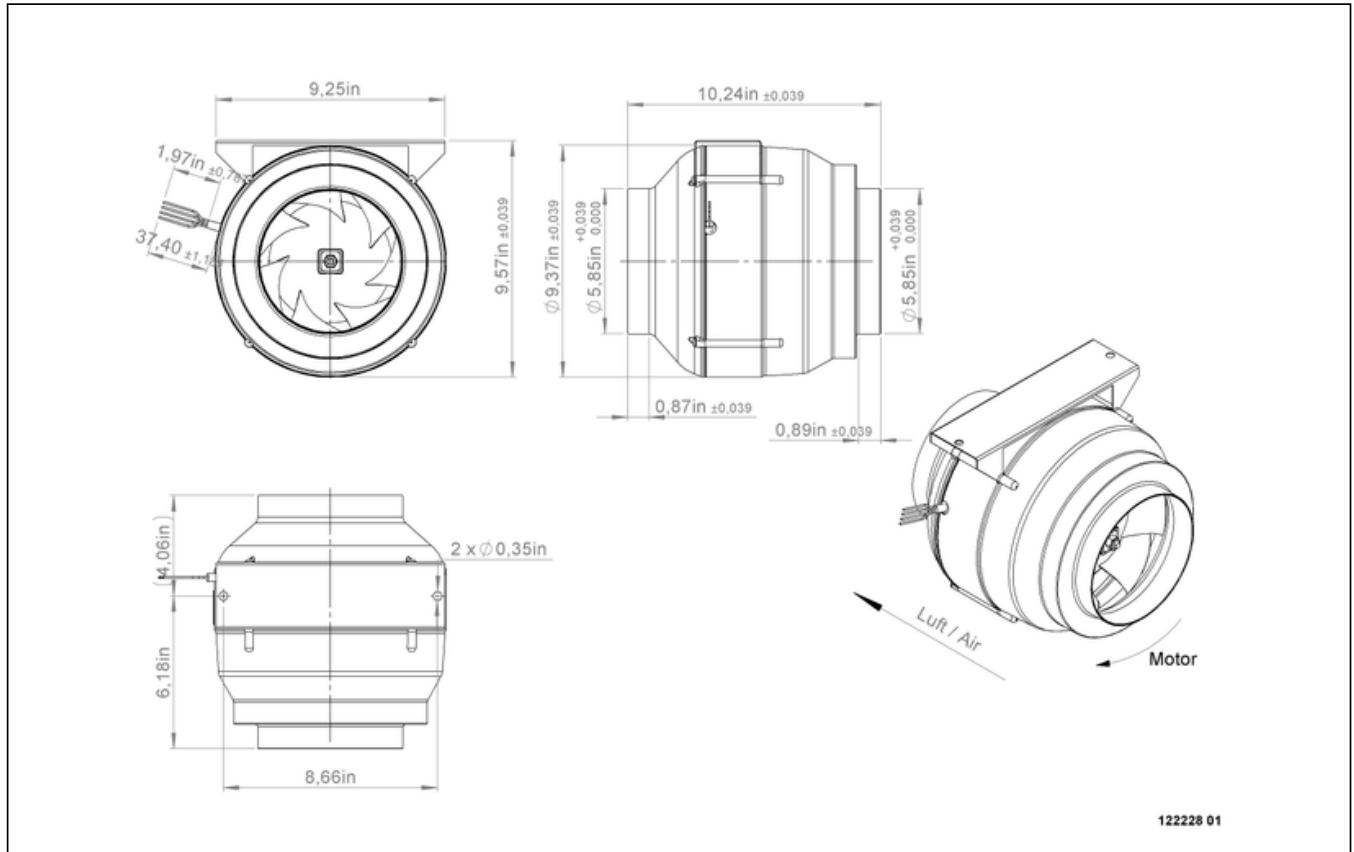

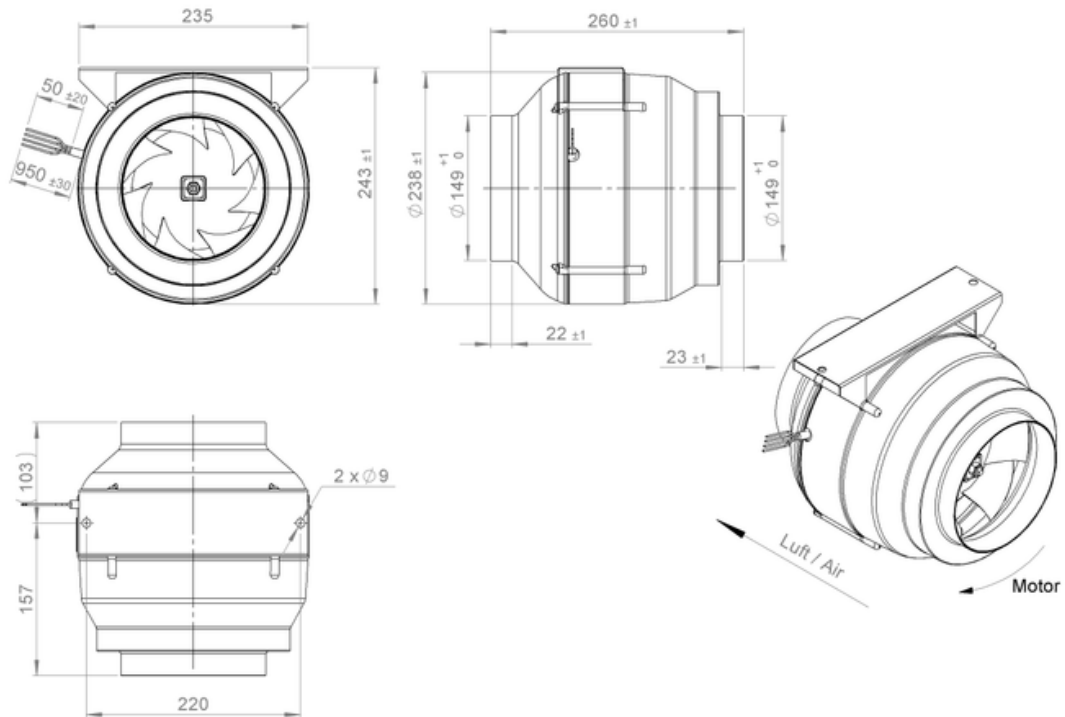


122228 01



EL 150L E2M 01

122228

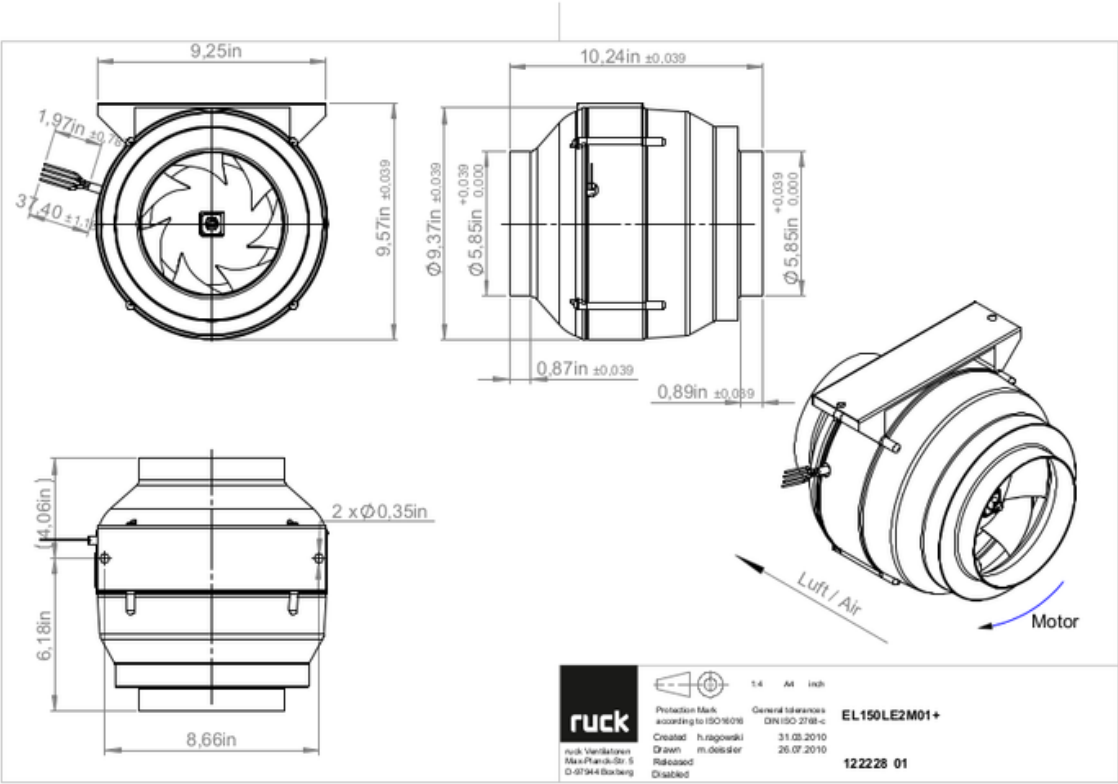


to the product detail page

EL 150L E2M 01


122228

ruck

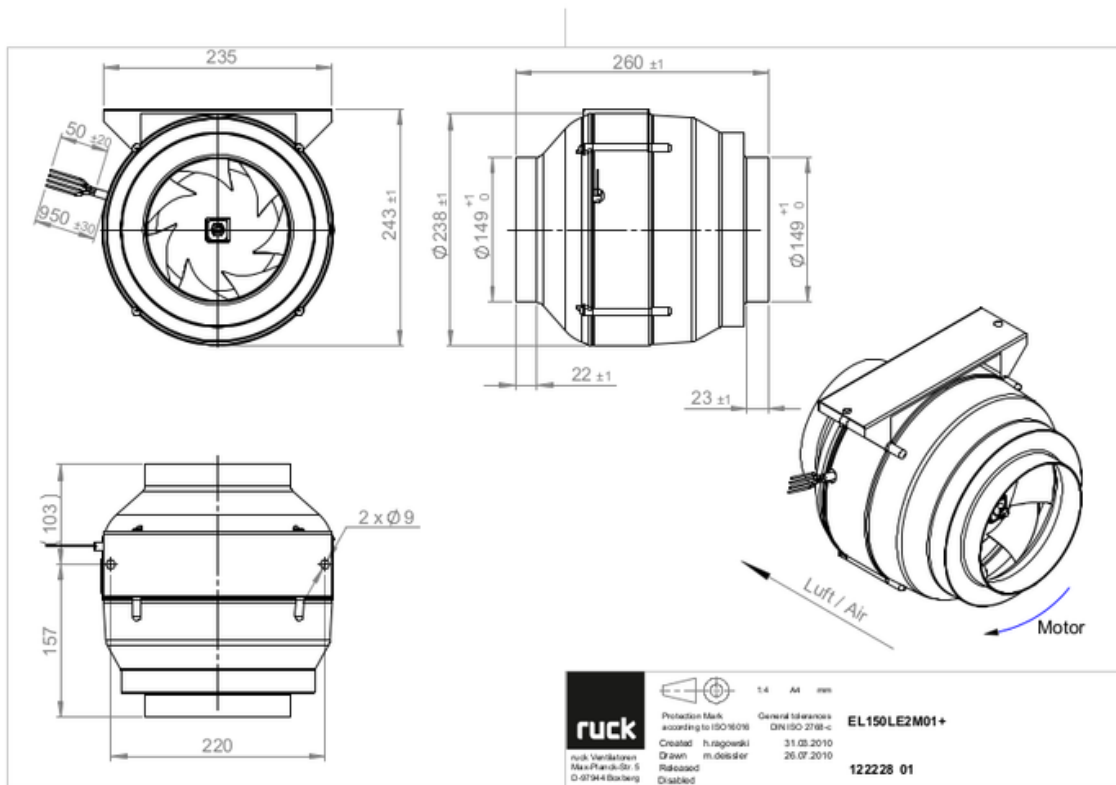

EL 150L E2M 01

122228

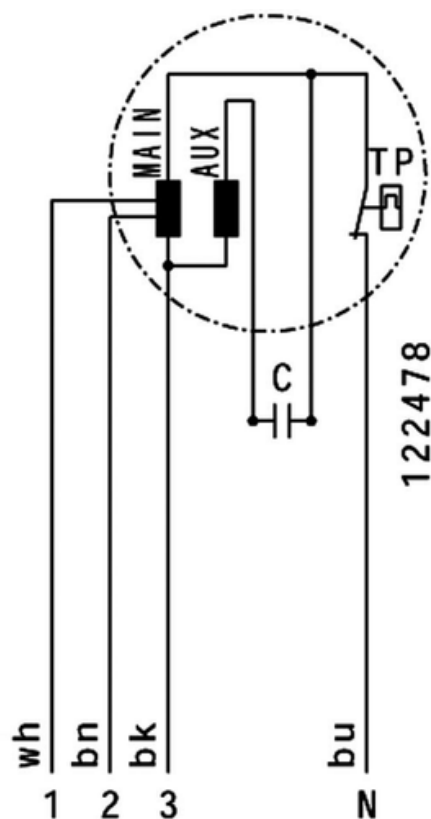

122478



to the product detail page