

EL 160L E2M 01

122227


ruck

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust AC motor, 3-steps controllable
- Conveyed medium temperature up to 50 °C in continuous operation
- Housing made of polyamide



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

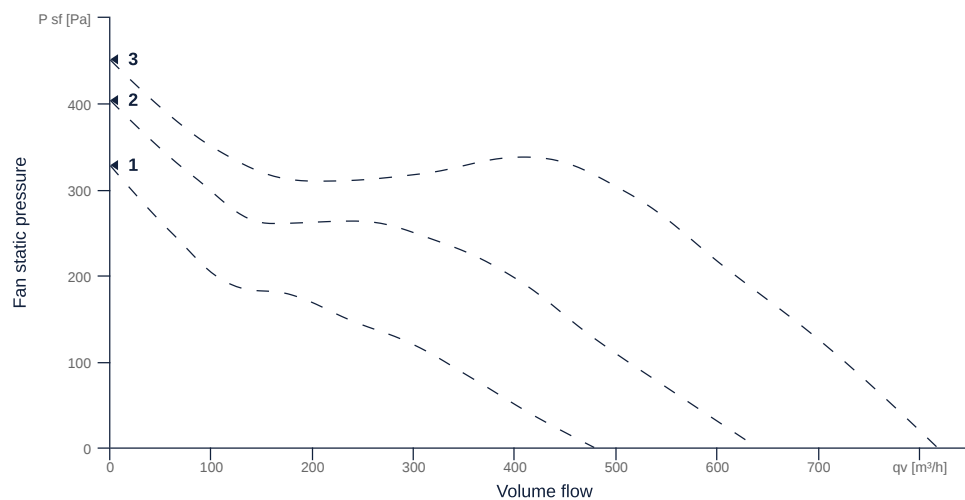

to the product detail page

EL 160L E2M 01

122227

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN160		DN
Rated voltage (entire device)	230	V	U_{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat_{casing}
Impeller material	Plastic		$mat_{impeller}$
IP-protection class (entire device)	IPX4		IP_{compl}
Weight	3.4	kg	m
Fan type	Diagonal		Fan_{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	127	W	$P_{ed, max}$
Max. operating current (device)	0.63	A	$I_{ed, max}$
Max. speed	2620	1/min	n_{max}
Max. stat. efficiency	33.3	%	η_{es}
Max. fan efficiency	36	%	η_e
Max. flowrate	820	m ³ /h	Q_v, max
Max. stat pressure	450	Pa	$p_{sf, max}$
Max. medium temperature	50	°C	T_m, max
Max. environment temperature	50	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$
Min. voltage	230	V	U_{min}



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		step-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		3.5	µF	Ccond
Voltage capacitor		450	V	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Rated current	0.5		A	Irated, f1
UL-Certification motor		None		ULcert

ERP DATA (LOT11)


Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2655	1/min	n _{opt}
Efficiency level	34.2	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.12	kW	P _{e, opt}
Overall efficiency	46.5	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	326	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	465	m³/h	q _{v, opt}


SMOKE EXTRACT DATA


Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

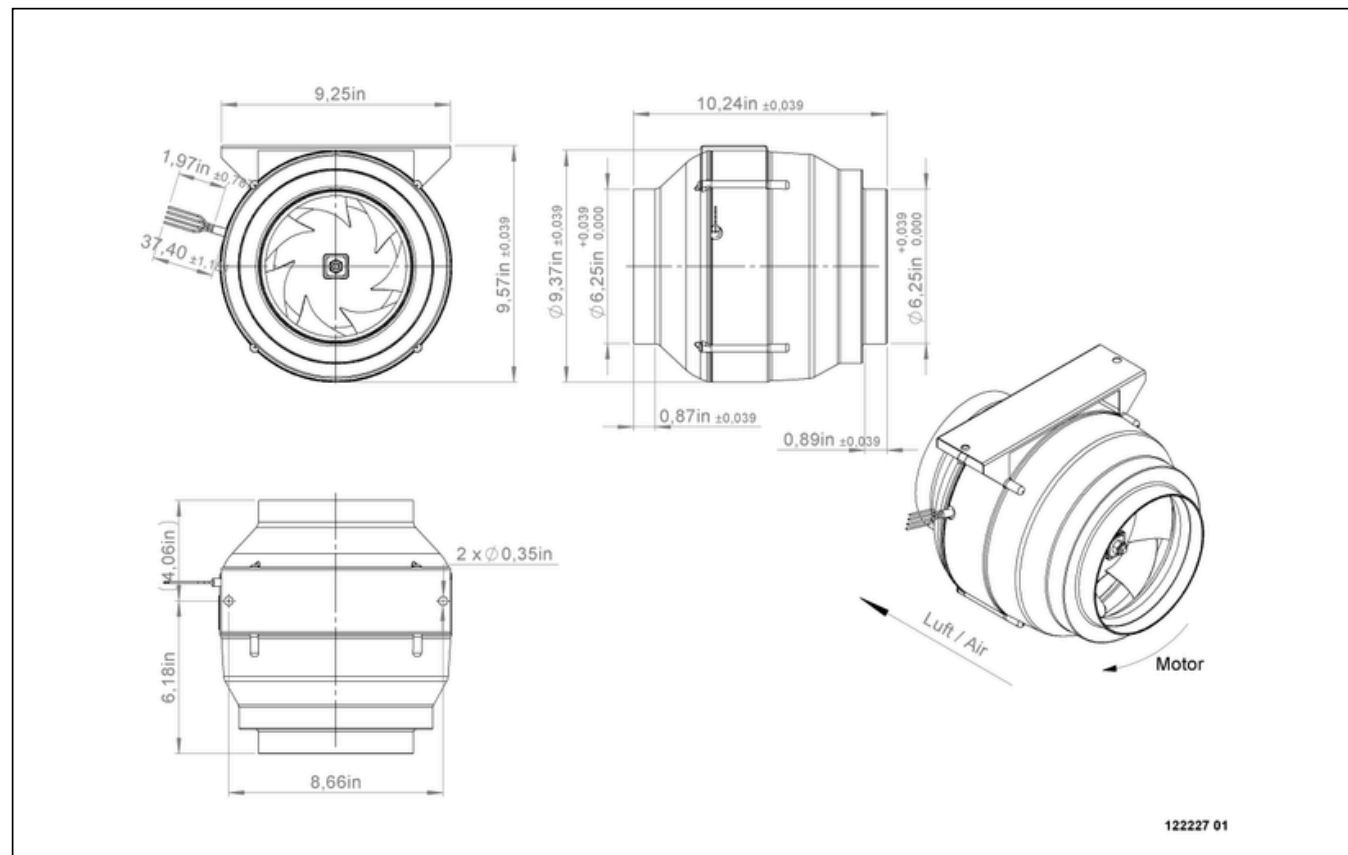




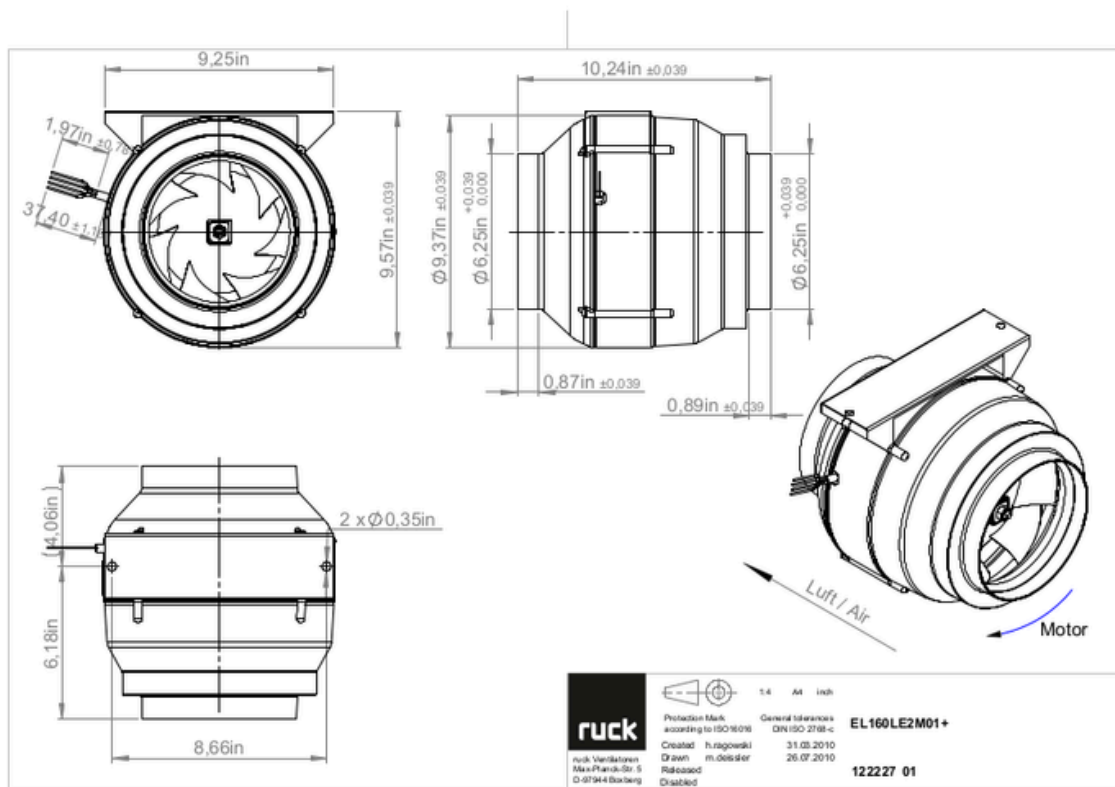

EL 160L E2M 01

122227


ruck

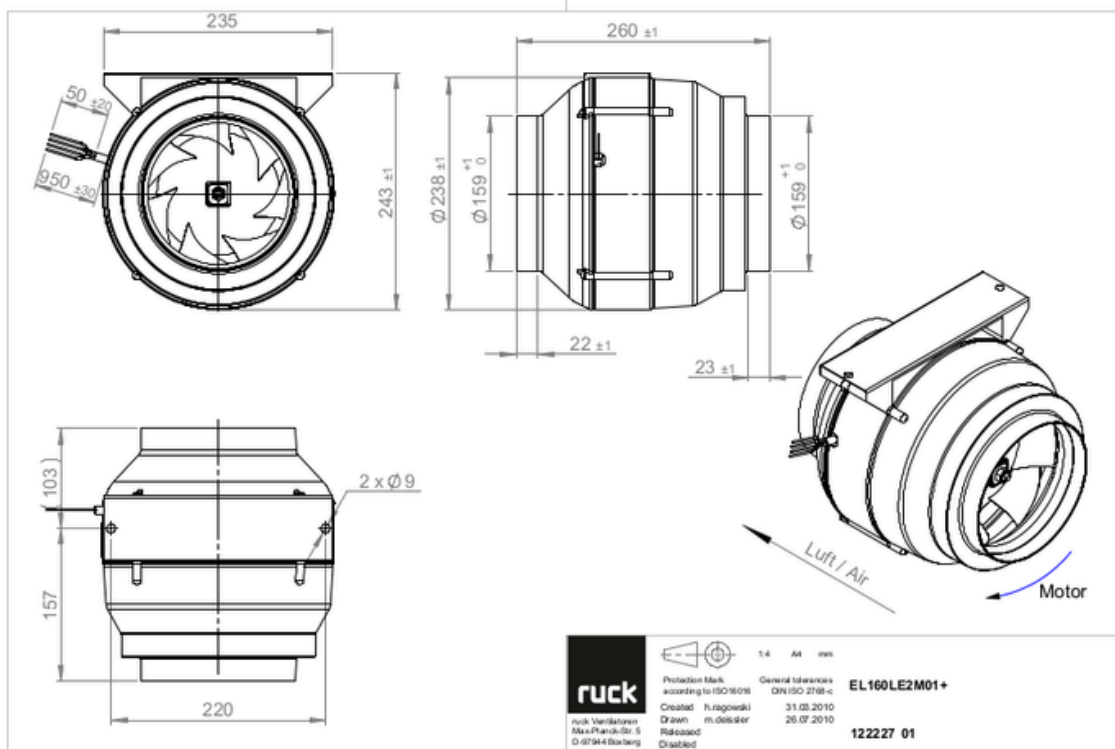

EL 160L E2M 01

122227


ruck

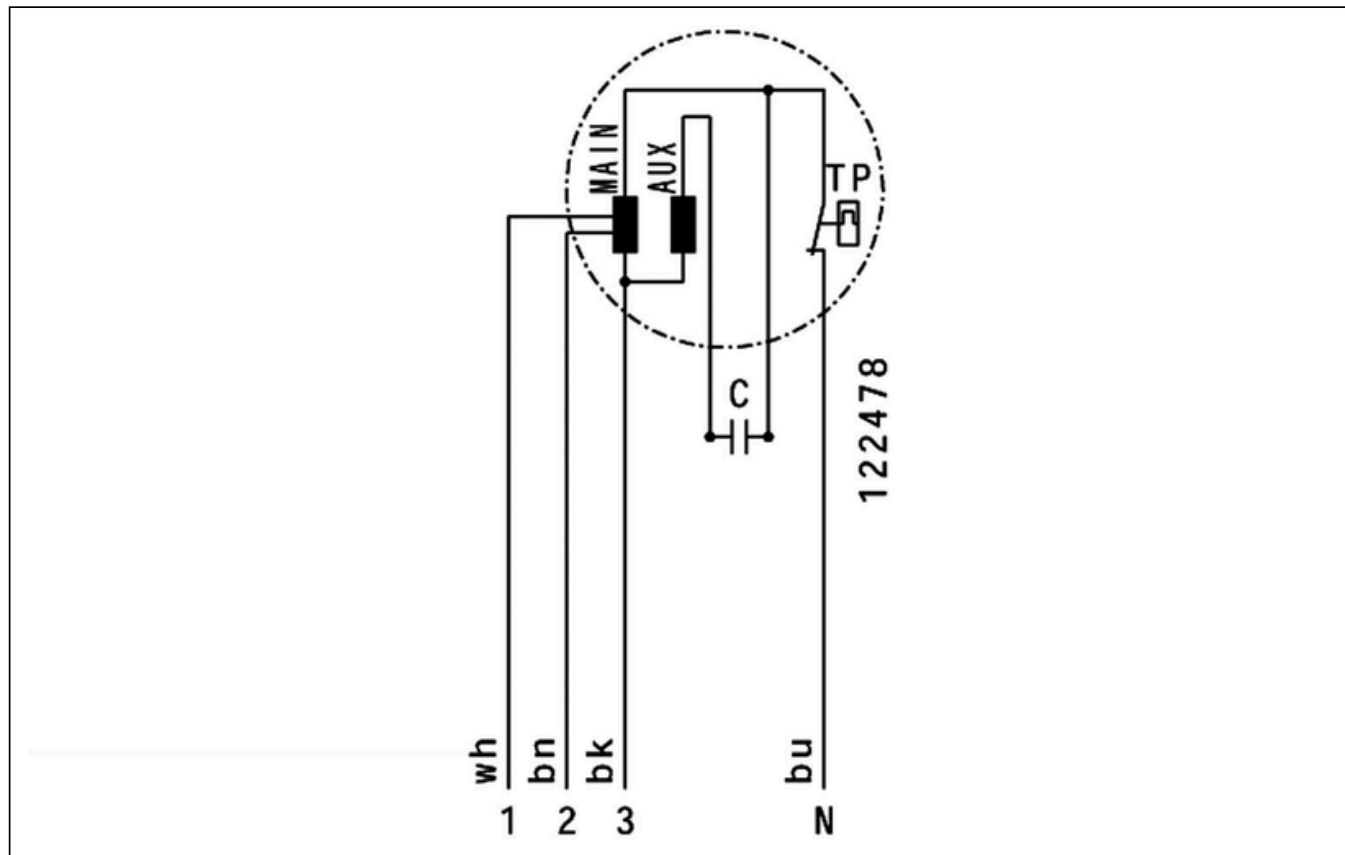

to the product detail page


MECHANICAL ACCESSORIES

FV 160 | 112831



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 160 | 112841



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 160 | 112852



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 160 | 102661



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 160D | 113485




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 160 | 102649



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 160 01 | 169591



- Protection grille for tube connection
- Galvanized wire

SDS 160 | 169605



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 160 | 169642



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, I_{max} = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature 50 °C
- Surface and flush mounting
- IP 44



to the product detail page