

EL 250 E2 06


116227

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust single phase AC motor
- Conveyed medium temperature up to 50 °C in continuous operation
- Housing made of galvanized steel sheet



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

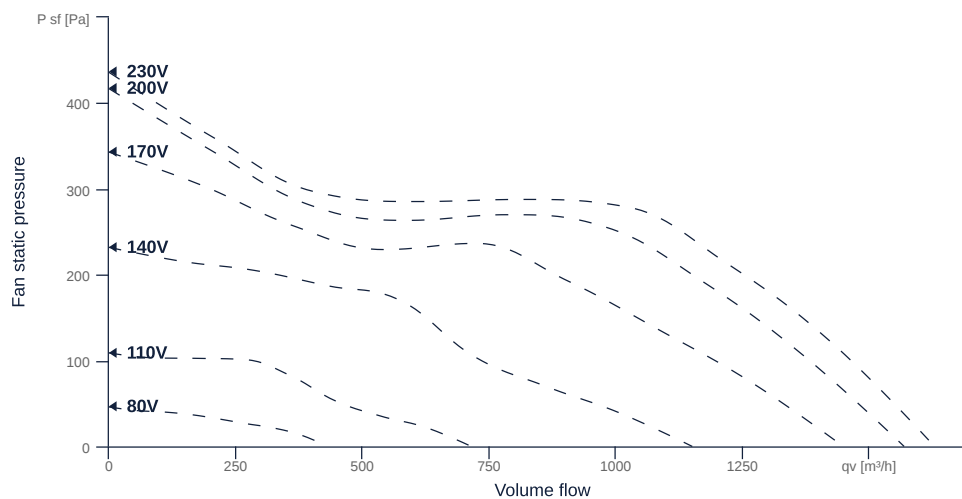

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
Weight	5.4	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	160	w	P _{ed, max}
Max. operating current (device)	0.82	A	I _{ed, max}
Max. speed	2820	rpm	n _{max}
Max. stat. efficiency	47	p	η _{es}
Max. fan efficiency	50.6	p	η _e
Max. flowrate	1625	CmH	Q _{v, max}
Max. stat pressure	455	Pa	p _{sf, max}
Max. medium temperature	50	°C	T _{m, max}
Max. environment temperature	50	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	v	U _{min}
Stall current	1.65	A	I _{LRA}



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP33		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		5	µF	Ccond
Voltage capacitor		450	v	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		v	Urated, f1
Rated current	0.7		A	Irated, f1
Speed	2702		rpm	nr1
Min. temperature	-30		°C	Tmotor, min
UL-Certification motor		None		ULcert

ERP DATA (LOT11)


Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2683	rpm	n _{opt}
Efficiency level	46.9	p	N
Efficiency category	statisch		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	0.16	kw	P _{e, opt}
Overall efficiency	65.7	p	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	276	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1045	CmH	Q _{v, opt}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

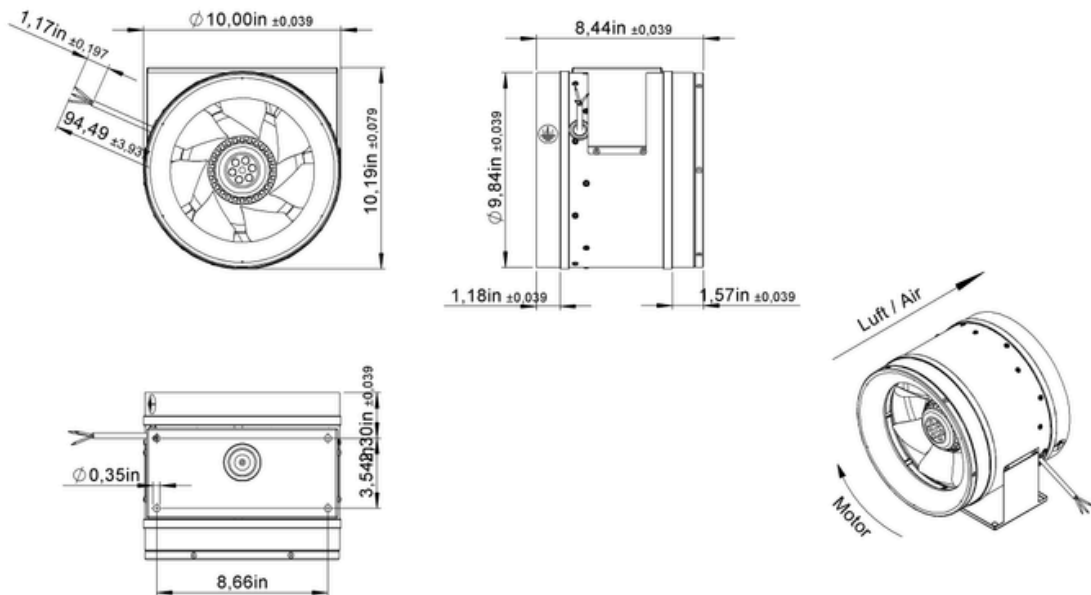

EL 250 E2 06

116227


ruck

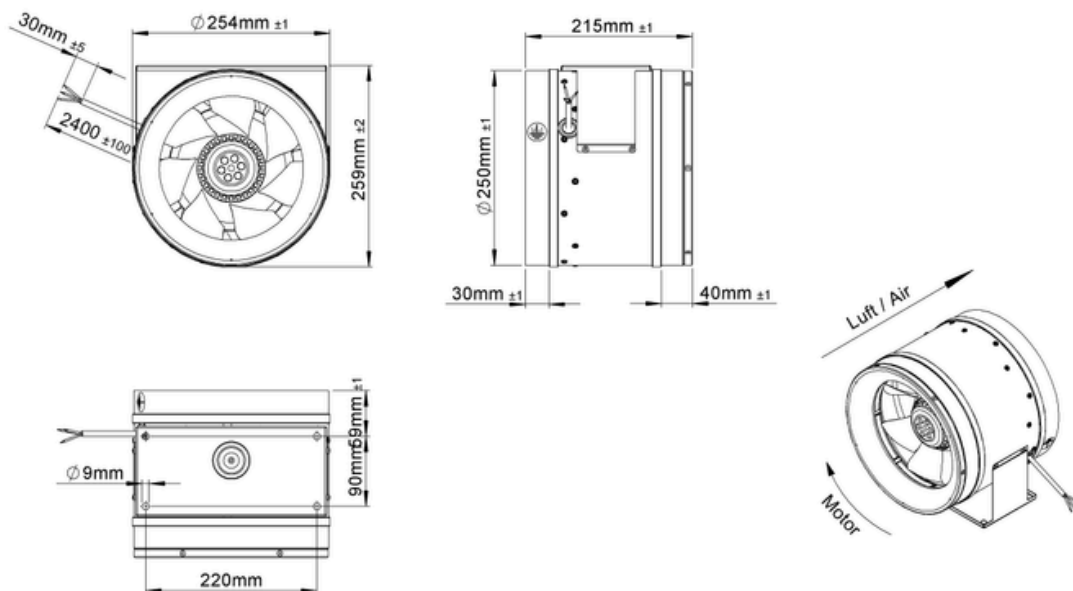

to the product detail page

EL 250 E2 06


116227

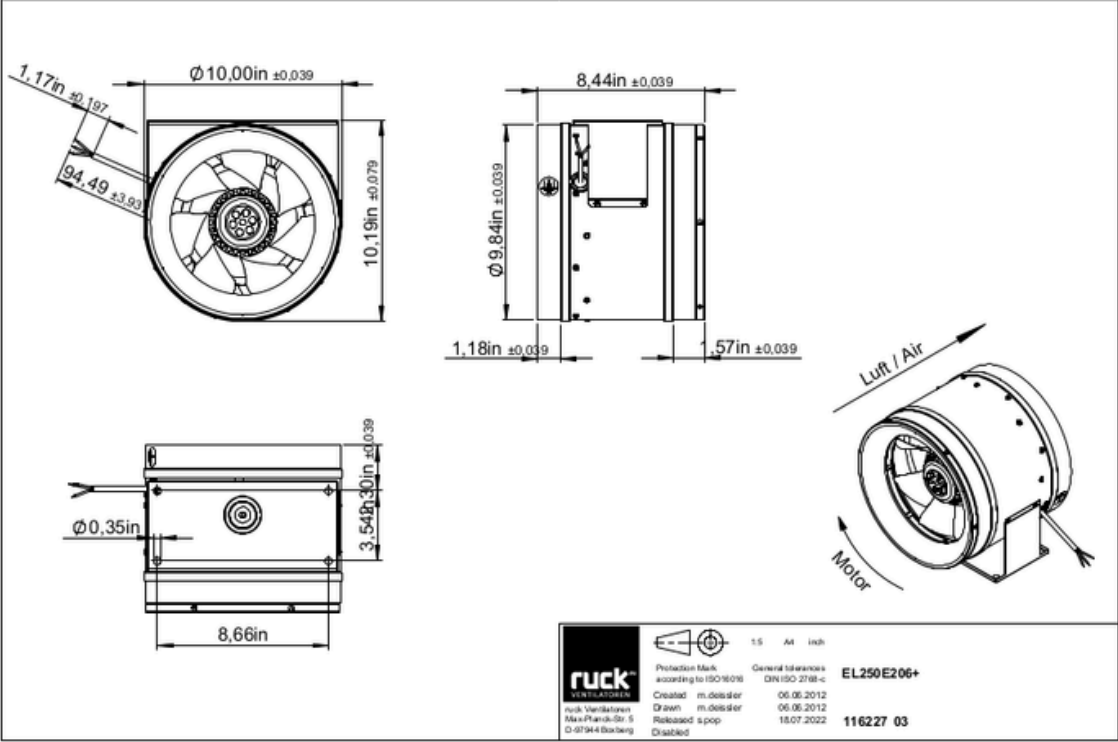

to the product detail page

EL 250 E2 06


116227

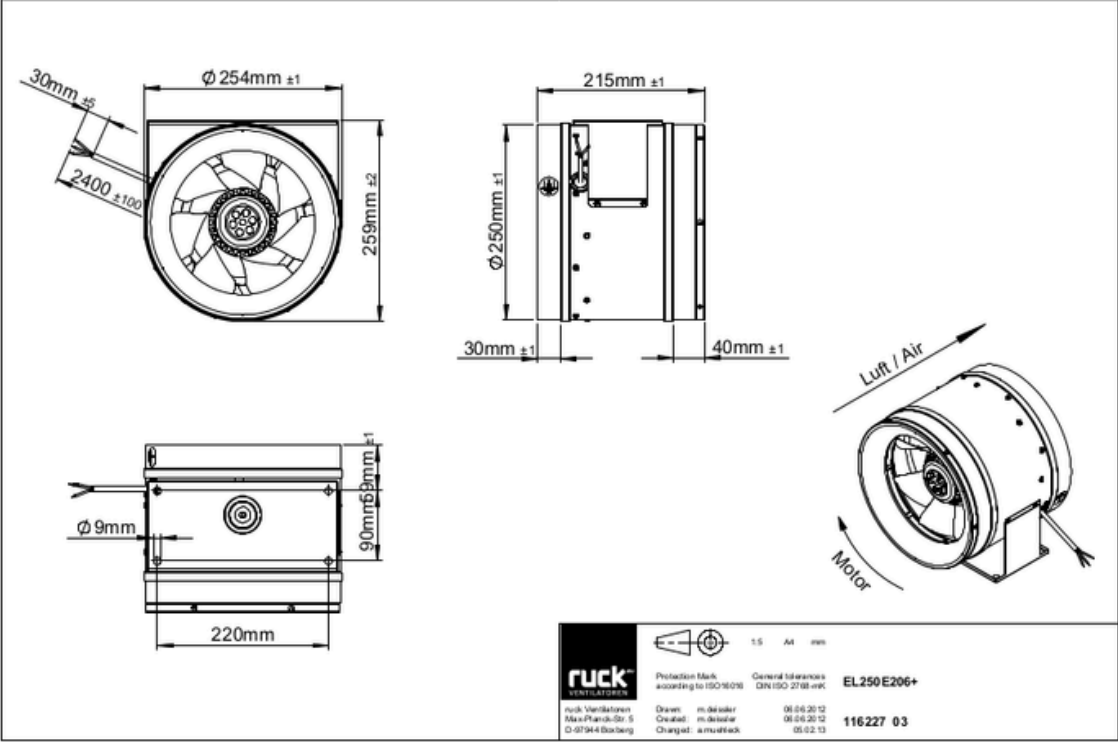

to the product detail page

EL 250 E2 06

116227

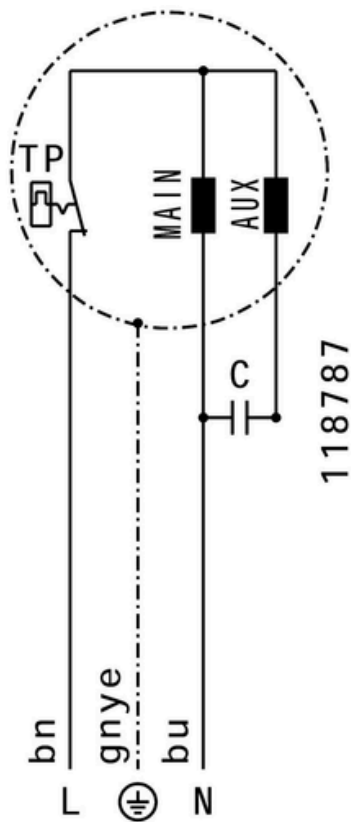

to the product detail page