

EL 355 E4 01

112369


ruck

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust single phase AC motor
- Conveyed medium temperature up to 80 °C in continuous operation
- Housing made of galvanized steel sheet



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

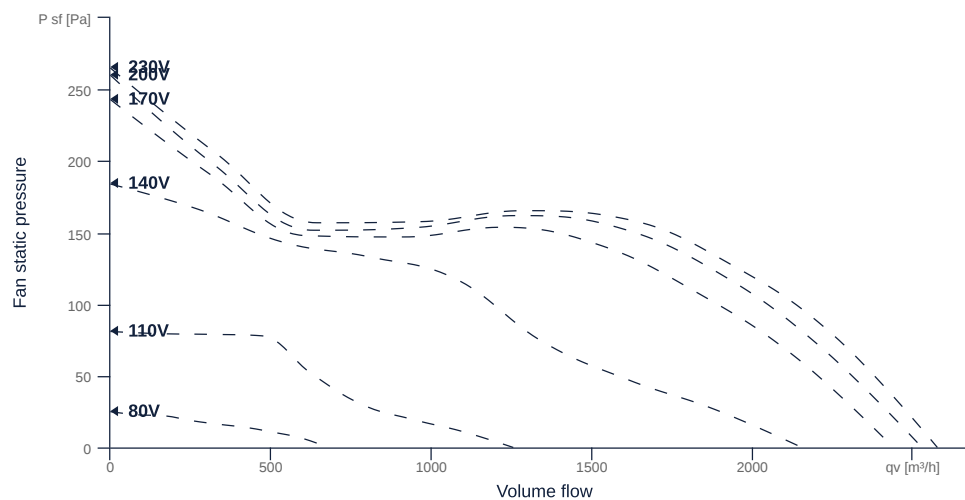

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	13.65	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	150	W	P _{ed, max}
Max. operating current (device)	0.98	A	I _{ed, max}
Max. speed	1460	1/min	n _{max}
Max. stat. efficiency	46.3	%	η _{es}
Max. fan efficiency	50.5	%	η _e
Max. flowrate	2580	m³/h	q _{v, max}
Max. stat pressure	270	Pa	p _{sf, max}
Max. medium temperature	80	°C	T _{m, max}
Max. environment temperature	80	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	V	U _{min}
Stall current	1.99	A	I _{LRA}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TMI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		4	μF	Ccond
Voltage capacitor		450	V	VUcond
Number of poles (1)		4.000000		num polesw1
Rated voltage	230		V	U _{rated} , f1
Rated current	0.7		A	I _{rated} , f1
Shaft power	100		W	P _{out} , f1
Speed	1430		1/min	n _{f1}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	1438	1/min	n _{opt}
Efficiency level	46.8	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.15	kW	P _e , opt
Overall efficiency	66	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	155	Pa	p _f , opt
Flowrate at energy efficiency optimum	1692	m³/h	Q _v , opt


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

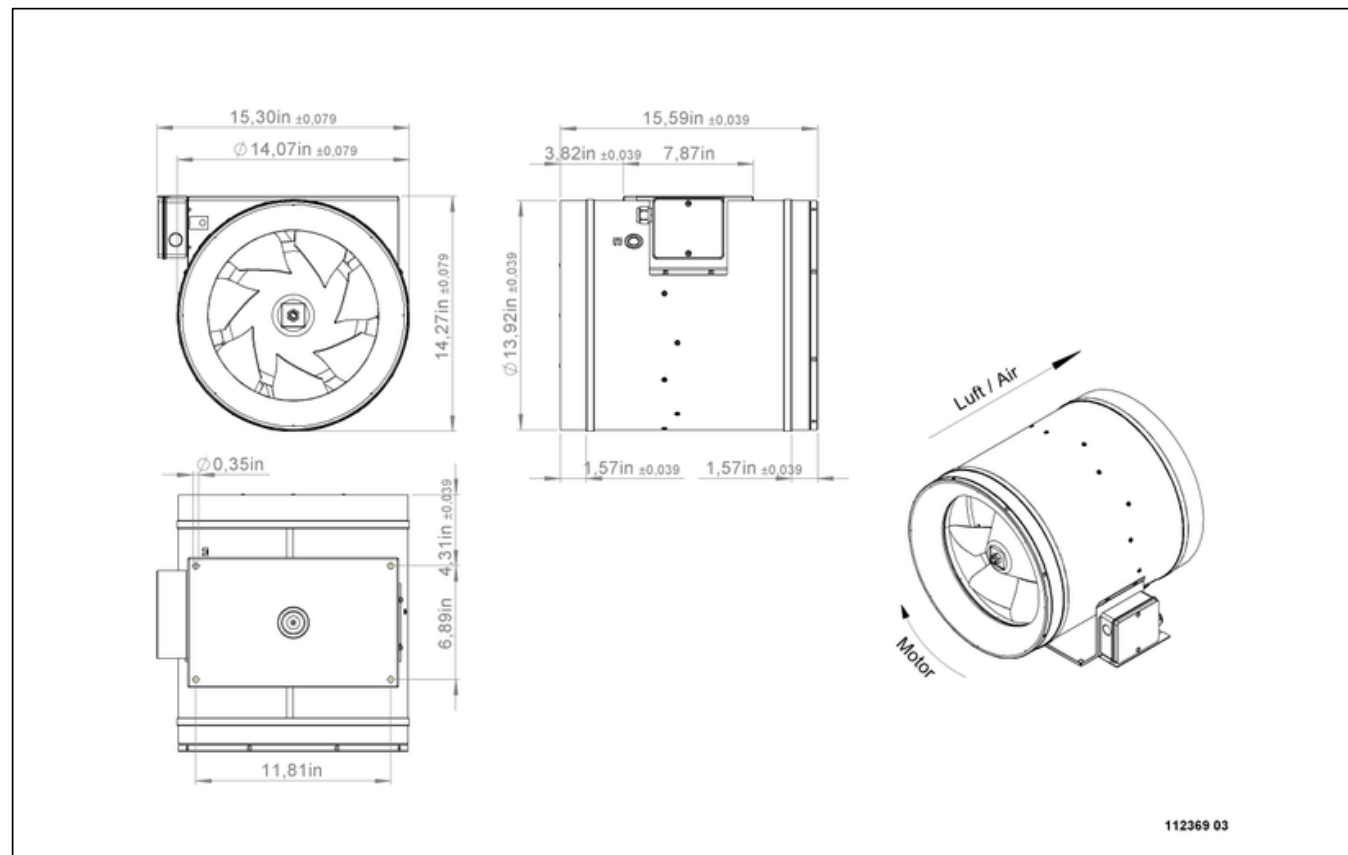

EL 355 E4 01

112369

ruck

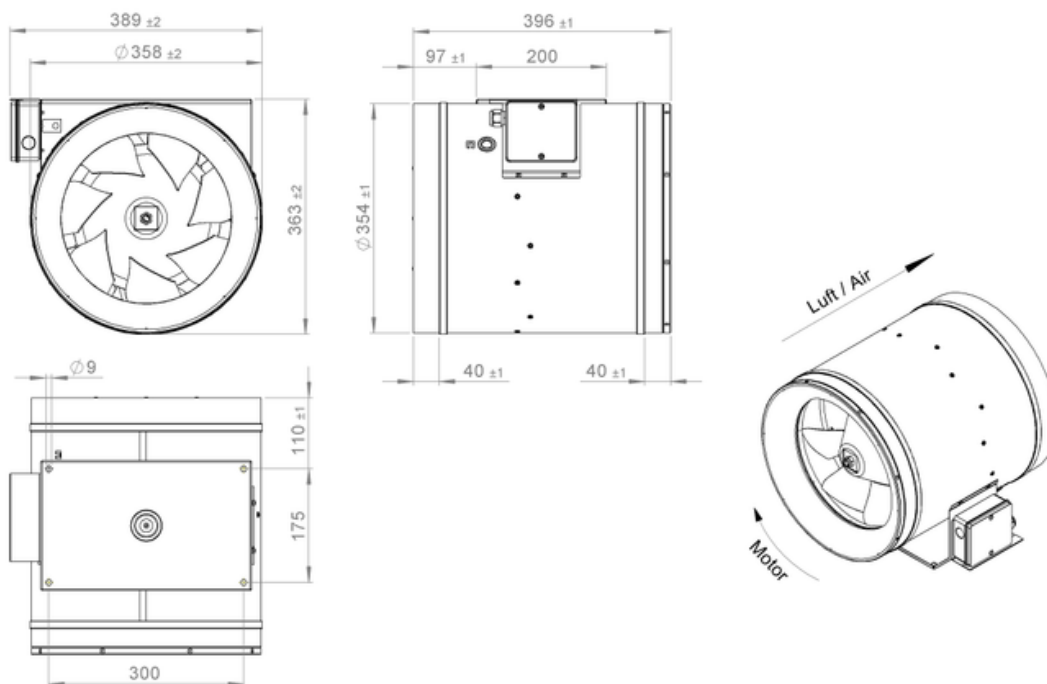

112369 03




to the product detail page

EL 355 E4 01

112369


ruck

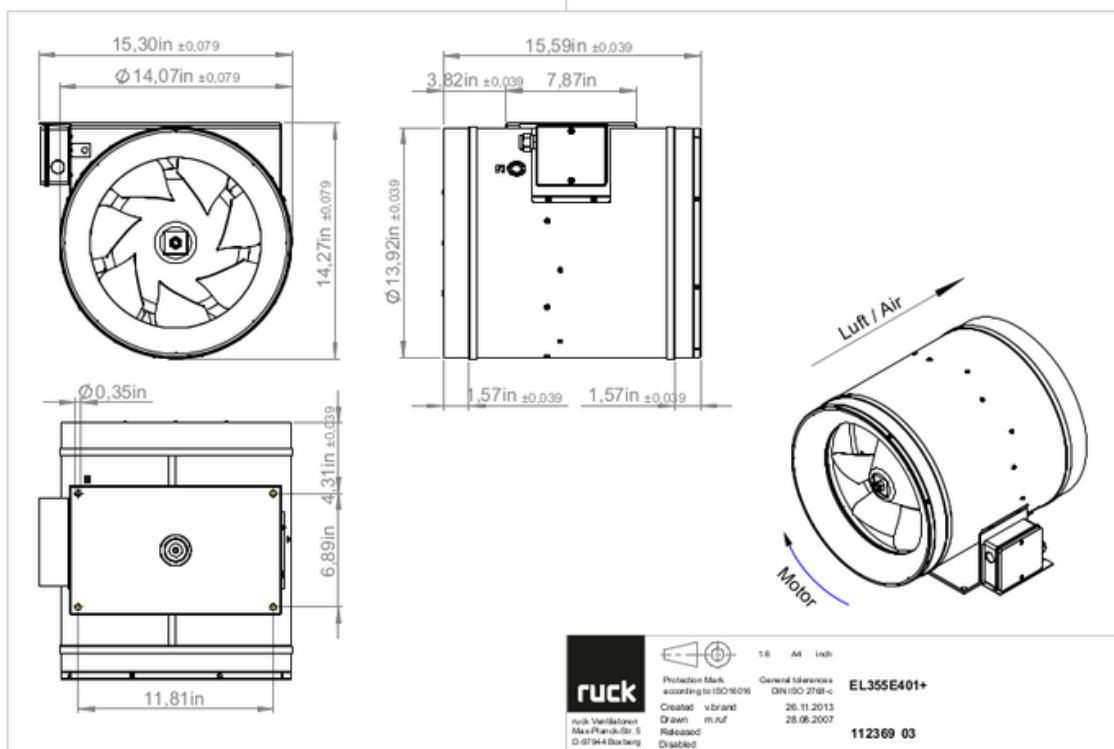


EL 355 E4 01

112369

ruck

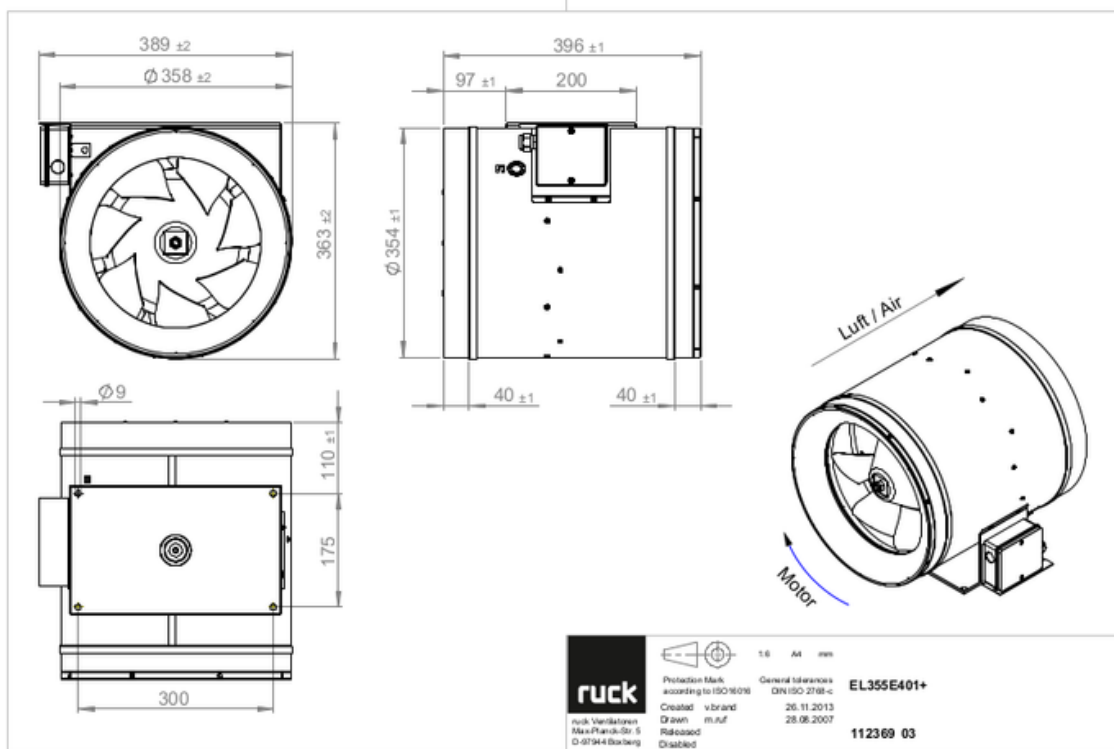


to the product detail page

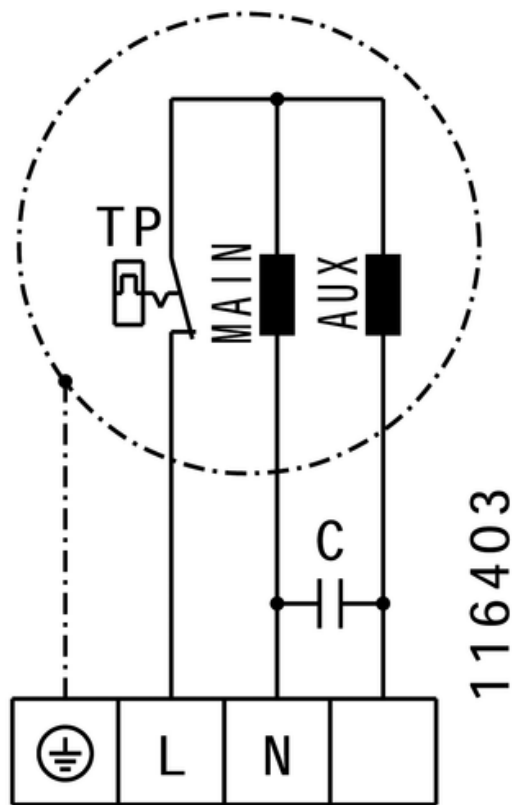


MECHANICAL ACCESSORIES

FV 355 | 112835



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 355 | 112847



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 355 | 112856



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 355 | 102665



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 355D | 113491




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 355 | 102653




- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 355 02 | 112674



- Inlet protection grille for Etaline
- Galvanized steel sheet

SG 355 01 | 169706



- Protection grille for tube connection
- Galvanized wire

SDS 355 | 169611



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 355 | 169646



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- $I_{max} = 25 \text{ A}$

TEM 035 | 103502



- 5-step transformer
- 230 V, 50/60 Hz, 3,5 A
- Output voltage: 230-190-170-140-110-80-0 V
- Protection class IP 54

TES 035 02 | 146195



- 5-step transformer
- 230 V, 50/60 Hz, 3,5 A
- Without housing, control cabinet installation
- Protection class IP 20



to the product detail page