


EM 100L EC 01


145677

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- High efficiency IE5 EC motor, 3-steps controllable
- Conveyed medium temperature up to 40 °C in continuous operation
- The benchmark for efficiency since 2012

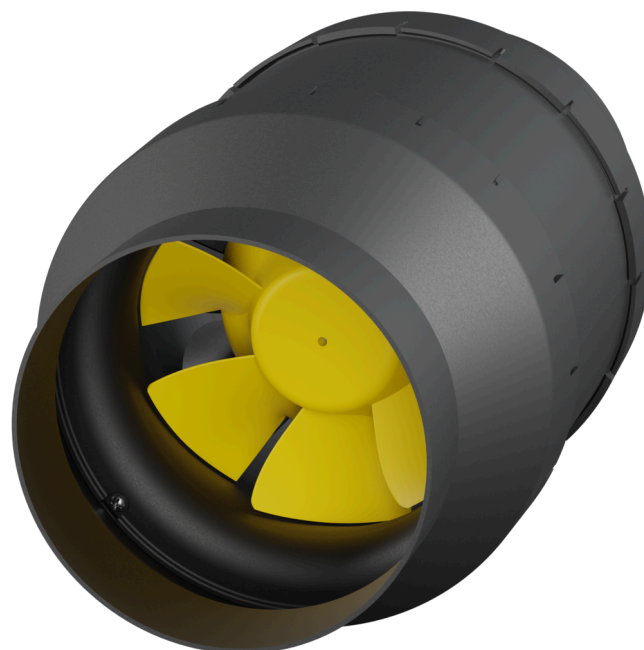

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

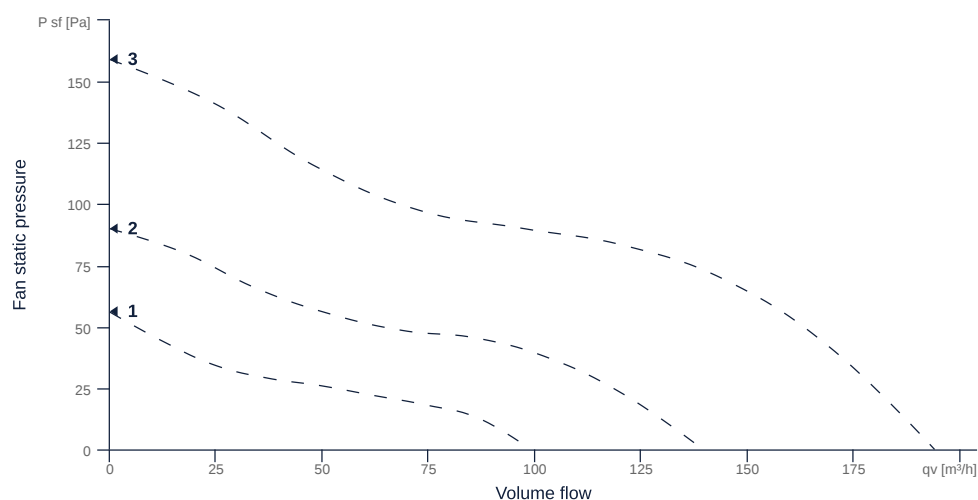

to the product detail page

EM 100L EC 01

145677

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN100		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX2		IPcompl
Weight	0.84	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	12	12	w	P _{ed, max}
Max. operating current (device)	0.2	0.2	A	I _{ed, max}
Max. speed	3630	3630	rpm	n _{max}
Max. stat. efficiency	25.9	25.9	p	η _{es}
Max. fan efficiency	28.4	28.4	p	η _e
Max. flowrate	190	190	CmH	q _{v, max}
Max. stat pressure	155	155	Pa	p _{sf, max}
Max. medium temperature	40	40	°C	T _{m, max}
Max. environment temperature	40	40	°C	T _{amb, max}



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		v	U _{rated, f1}
Nominal power	10		w	P _a
Speed	3800		rpm	n _{f1}
Efficiency	38		p	η _{m, f1}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	3627	rpm	n _{opt}
Efficiency level	31.8	p	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.01	kw	P _{e, opt}
Overall efficiency	63.8	p	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	89	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	101	CmH	q _{v, opt}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

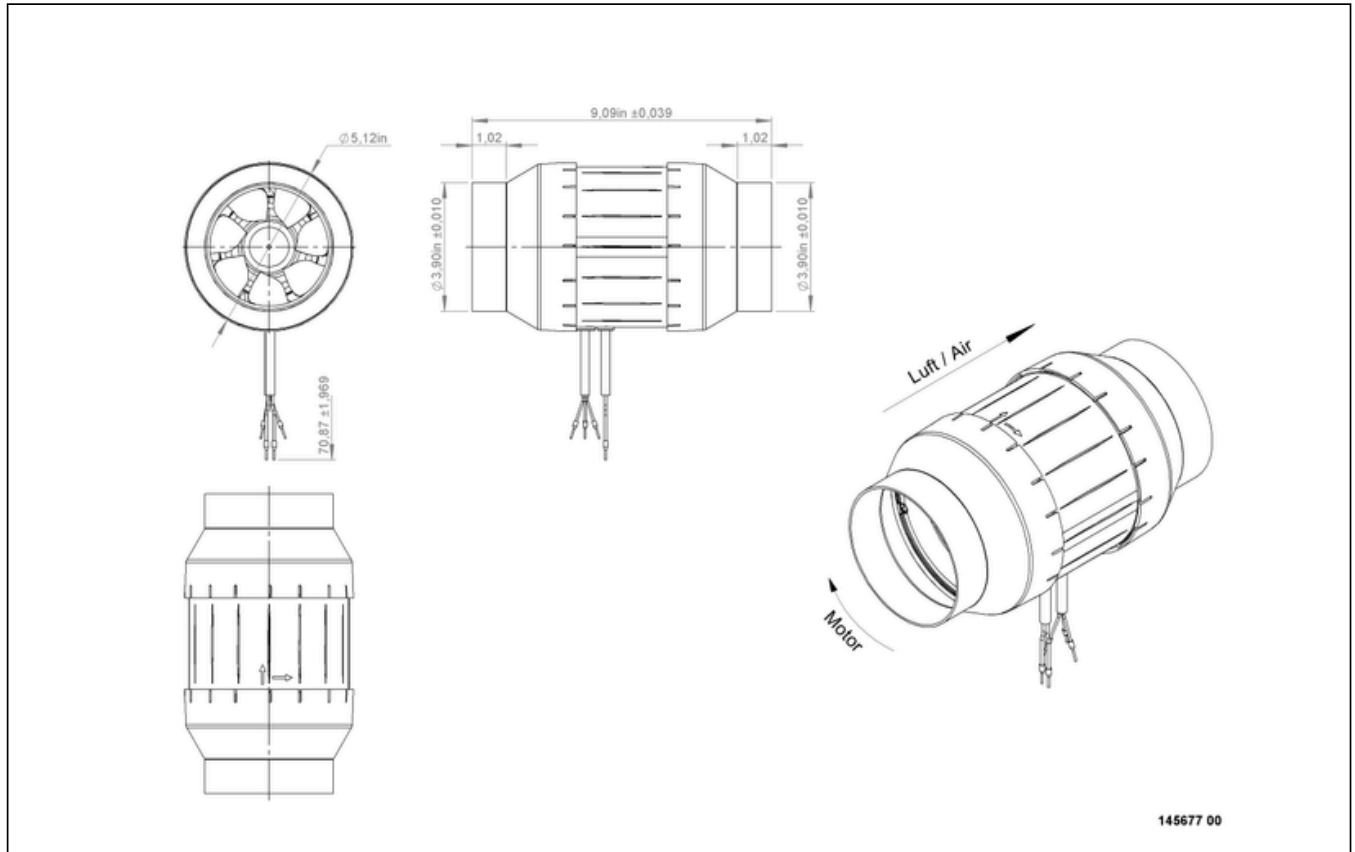

EM 100L EC 01


145677

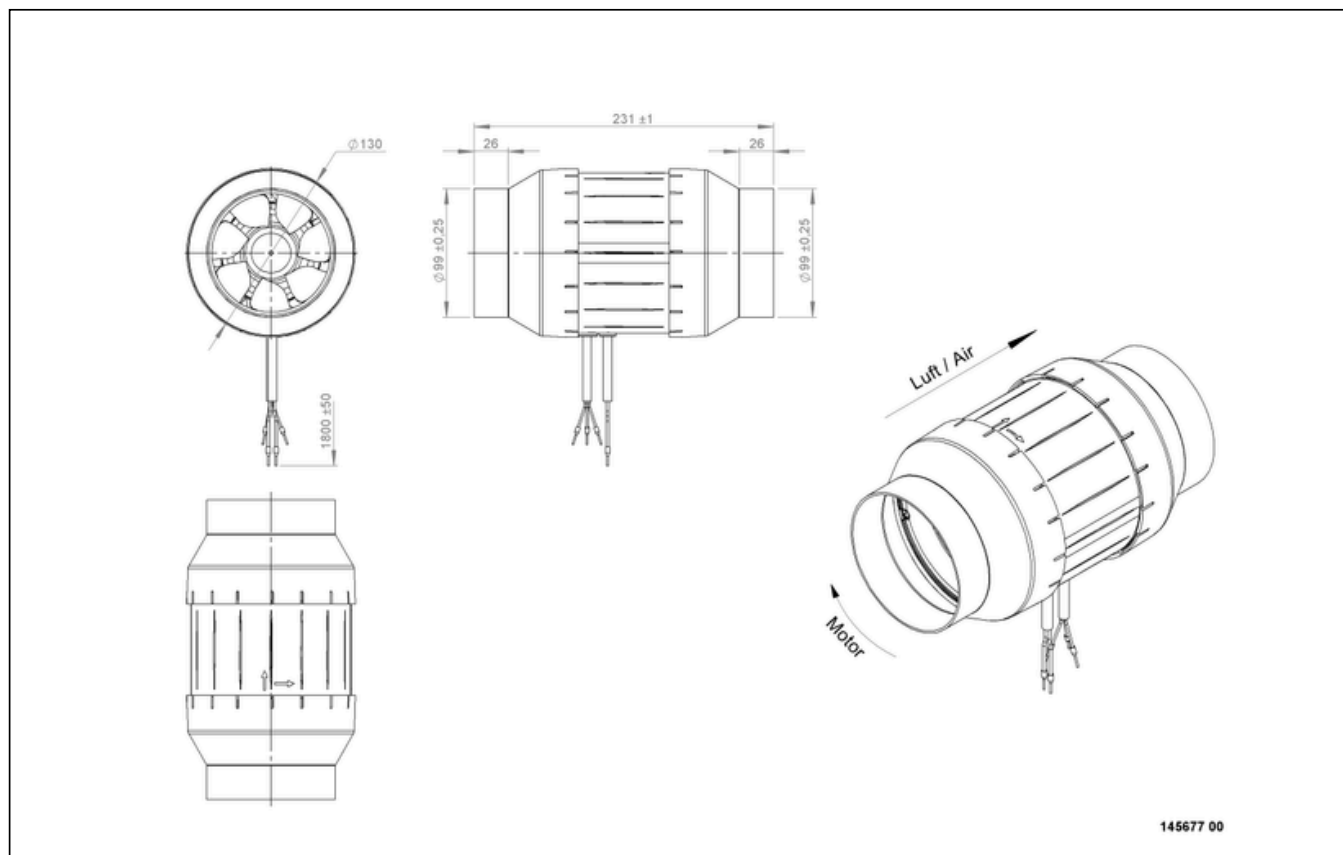

to the product detail page

EM 100L EC 01


145677

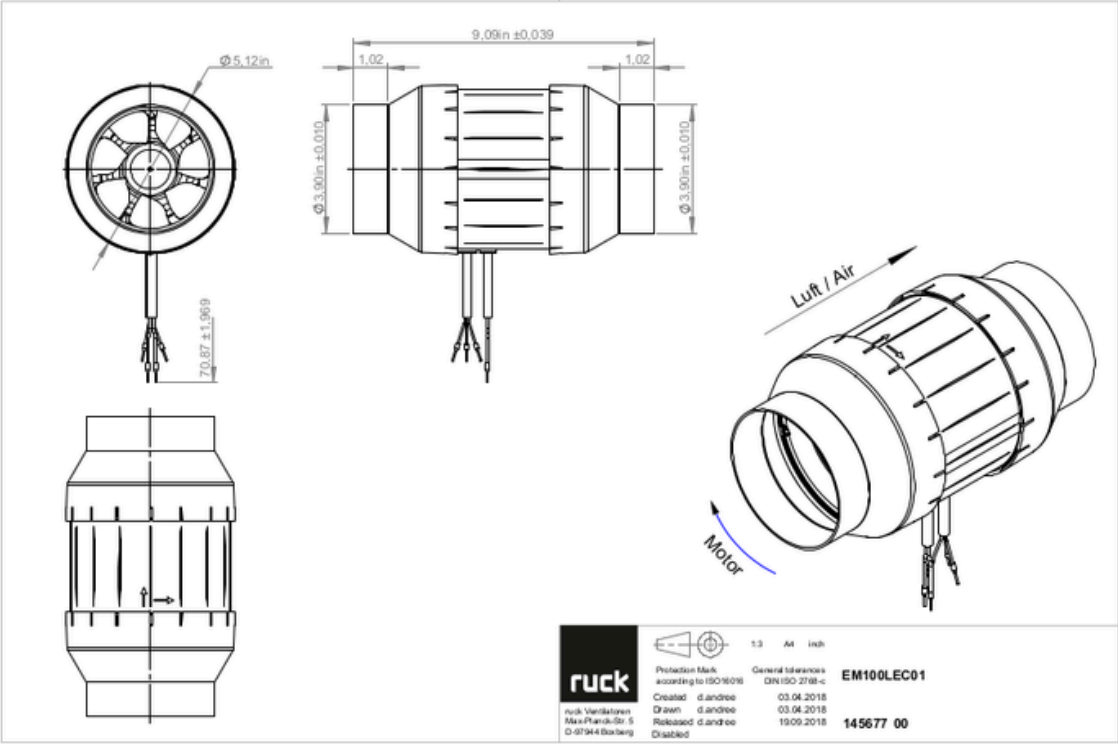

to the product detail page

EM 100L EC 01


145677

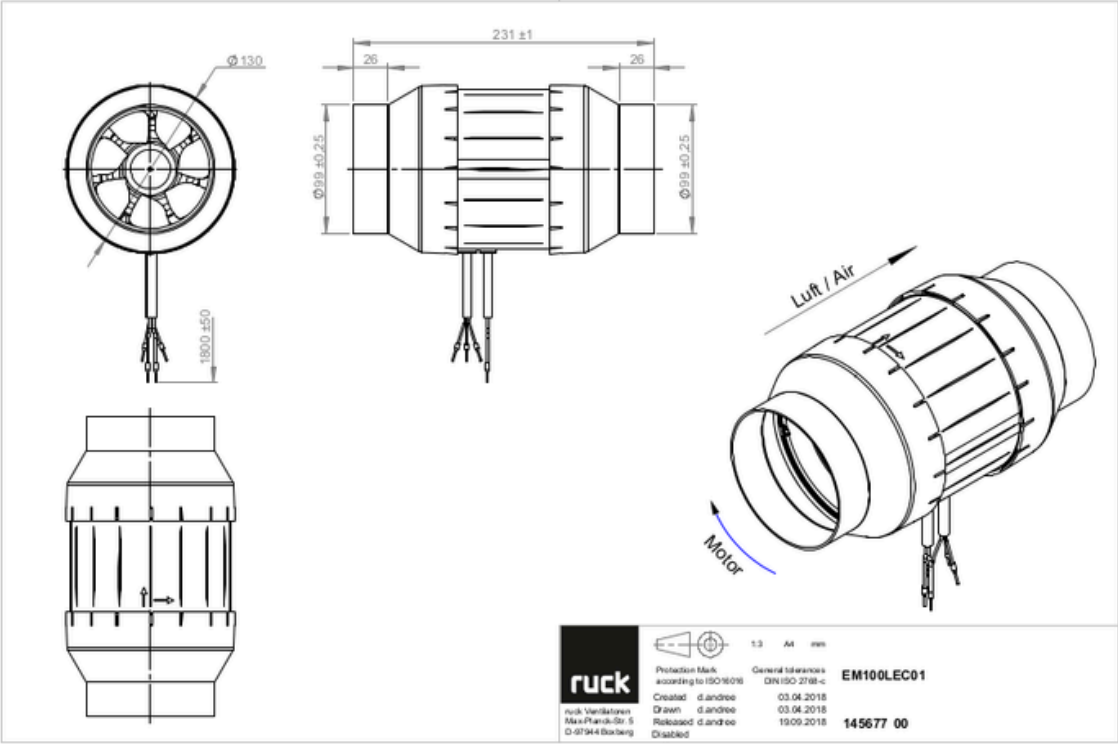

to the product detail page

EM 100L EC 01

145677

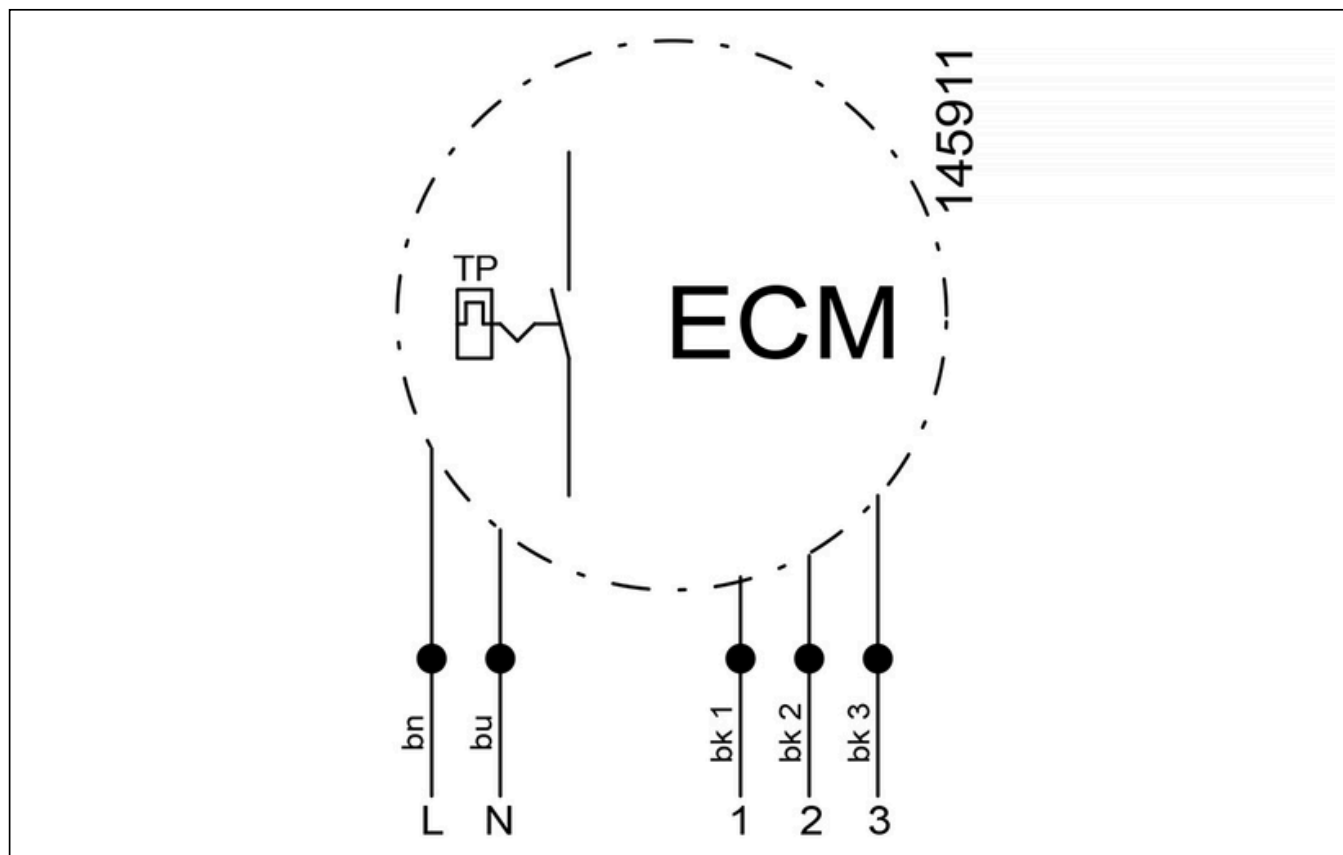

to the product detail page