


EM 100L EC 01


145677

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- High efficiency IE5 EC motor, 3-steps controllable
- Conveyed medium temperature up to 40 °C in continuous operation
- The benchmark for efficiency since 2012

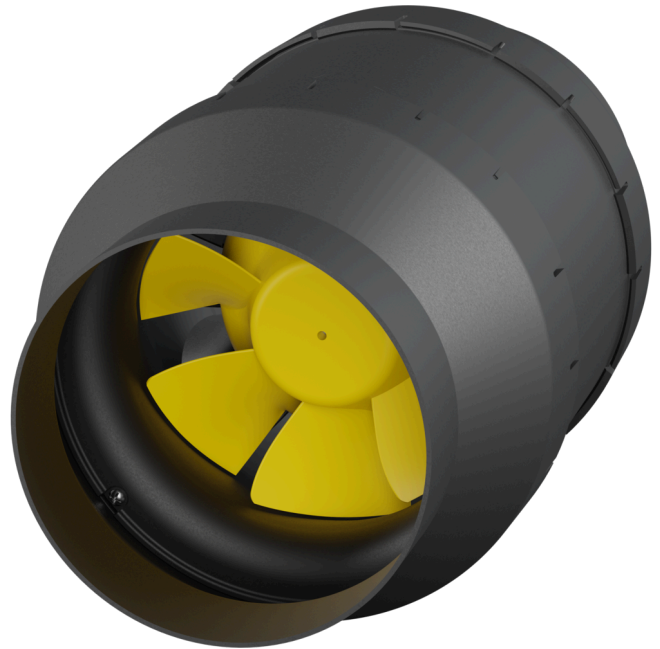

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

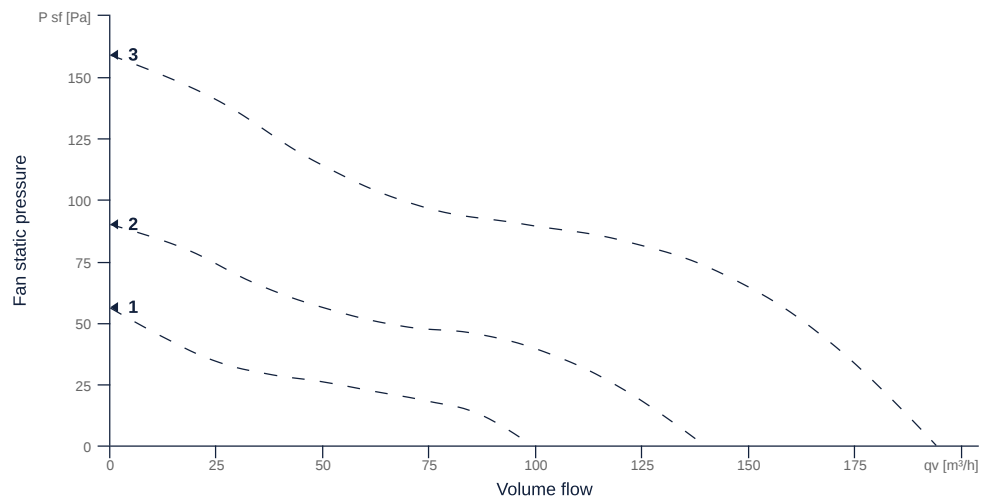

to the product detail page

EM 100L EC 01

145677

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN100		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX2		IP _{compl}
Weight	0.84	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	12	12	W	P _{ed, max}
Max. operating current (device)	0.2	0.2	A	I _{ed, max}
Max. speed	3630	3630	1/min	n _{max}
Max. stat. efficiency	25.9	25.9	%	η _{es}
Max. fan efficiency	28.4	28.4	%	η _e
Max. flowrate	190	190	m³/h	Q _{v, max}
Max. stat pressure	155	155	Pa	p _{sf, max}
Max. medium temperature	40	40	°C	T _{m, max}
Max. environment temperature	40	40	°C	T _{amb, max}



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Shaft power	10		W	Pout, f1
Speed	3800		1/min	nf1
Efficiency	38		%	ηm, f1
UL-Certification motor		None		ULcert


ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	3627	1/min	nopt
Efficiency level	31.8	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.01	kW	Pe, opt
Overall efficiency	63.8	%	ηges
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	89	Pa	pft, opt
Flowrate at energy efficiency optimum	101	m³/h	qv, opt

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

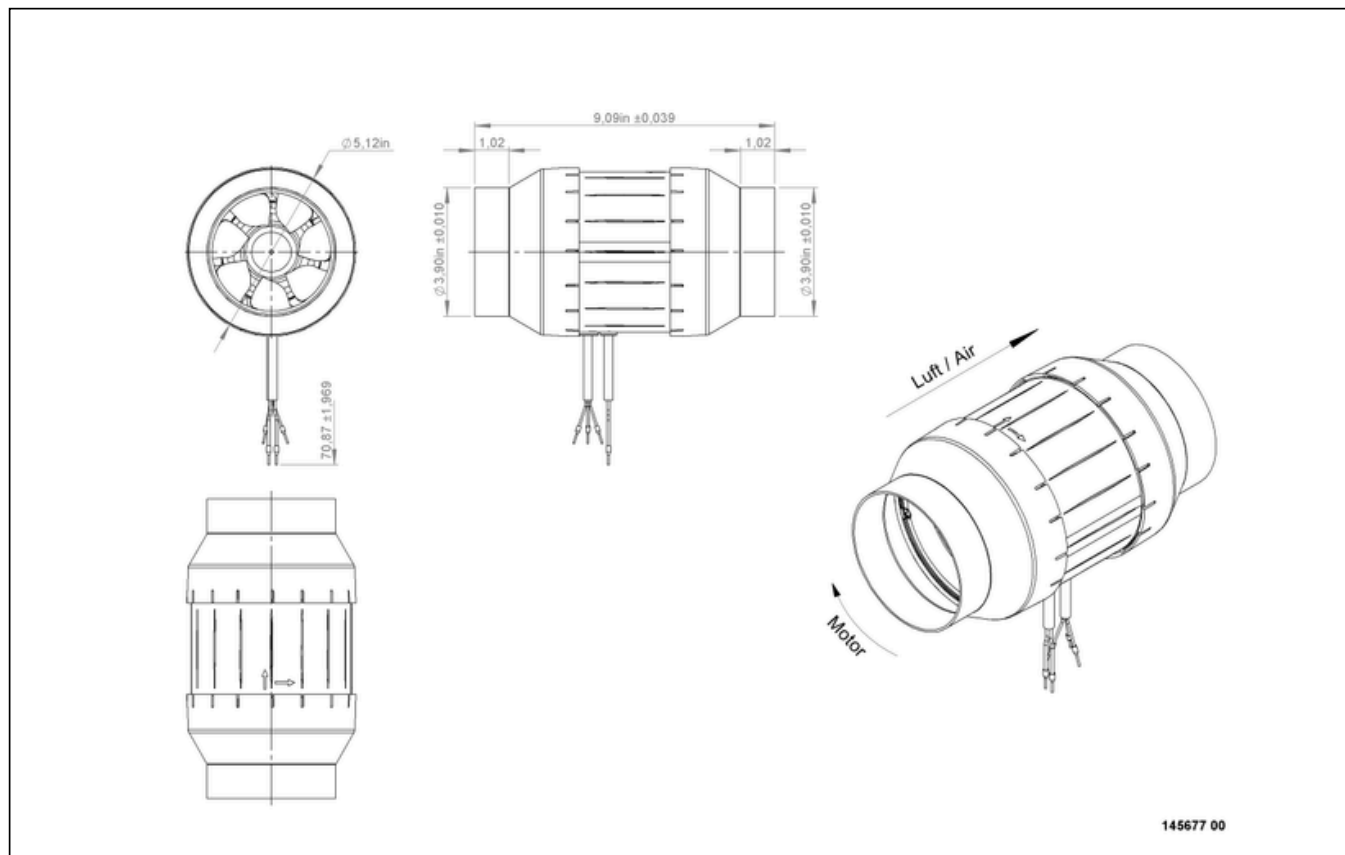

EM 100L EC 01

145677


ruck

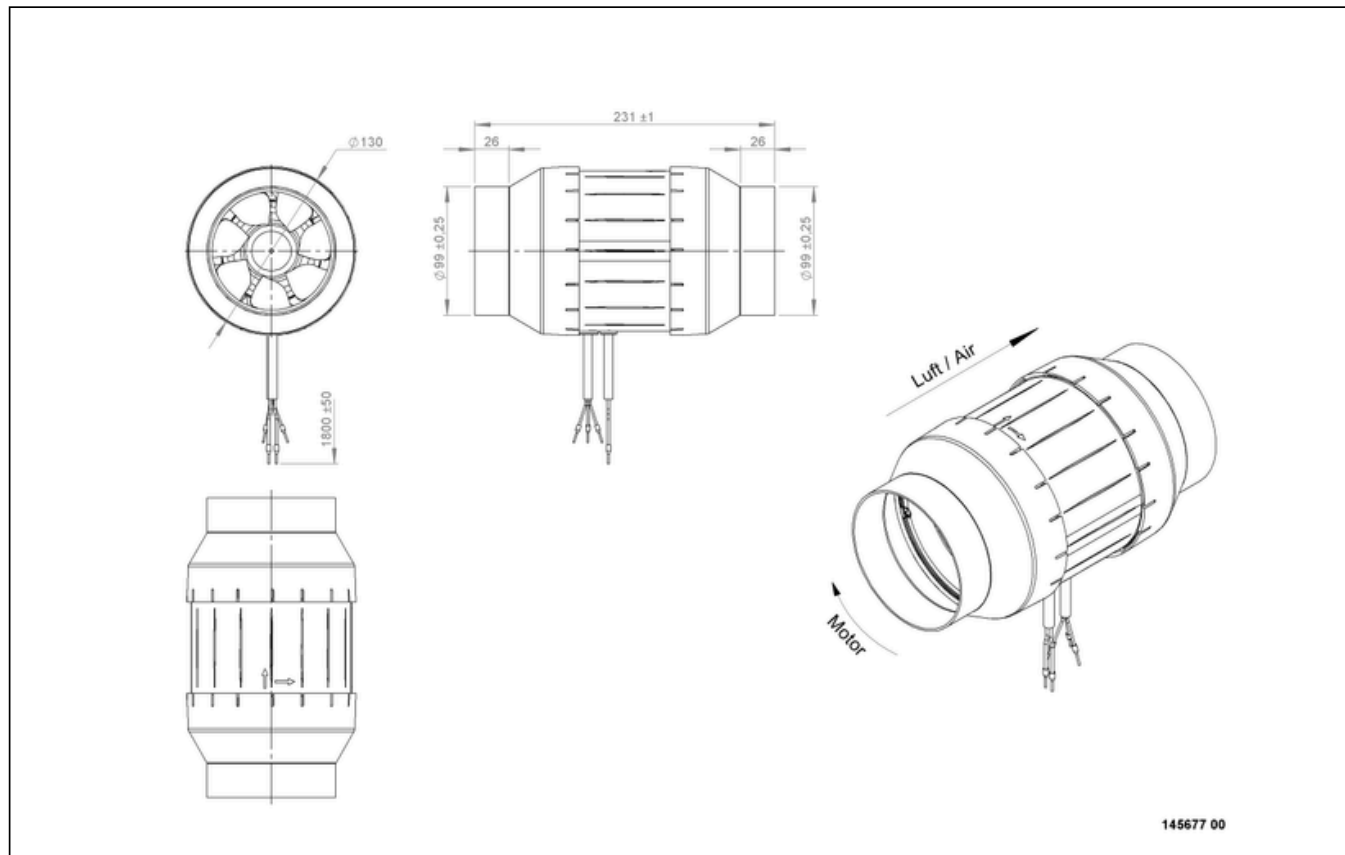

EM 100L EC 01

145677


ruck

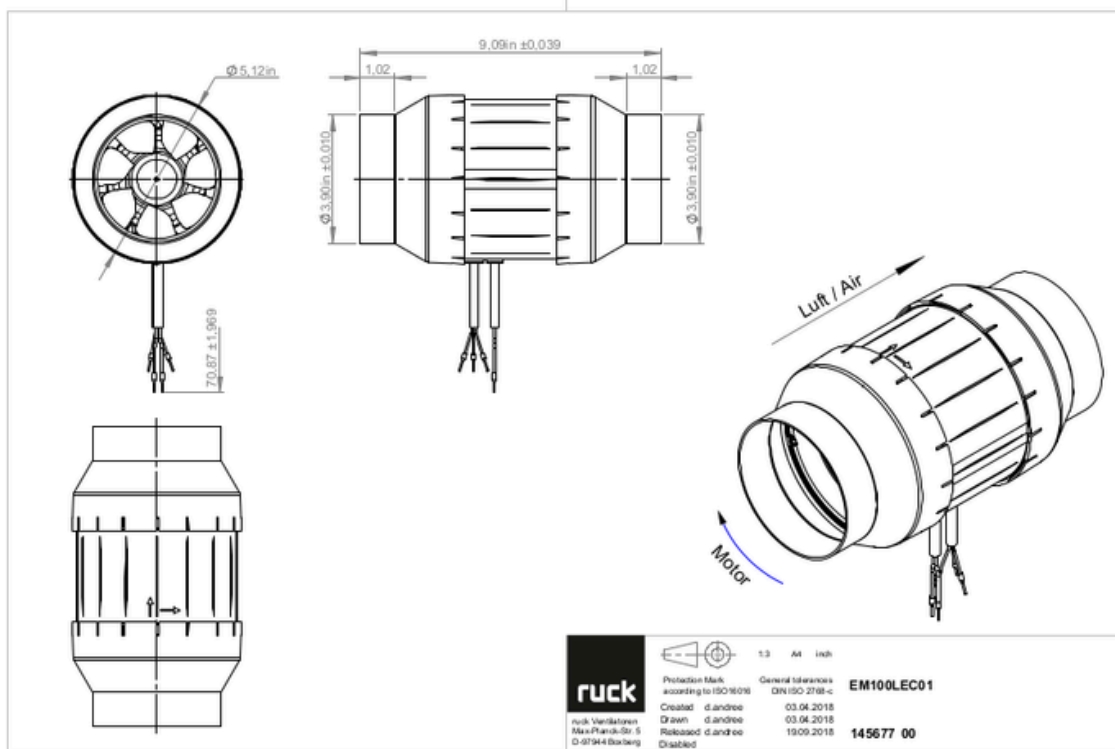

EM 100L EC 01

145677


ruck

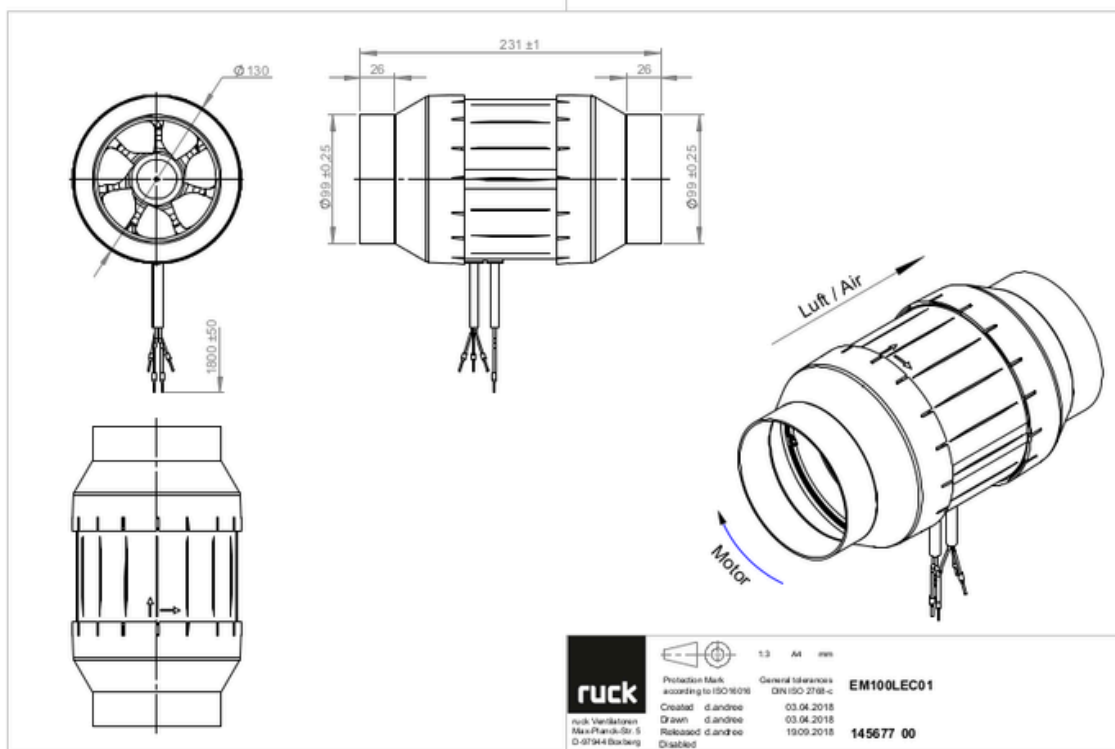

EM 100L EC 01

145677


ruck

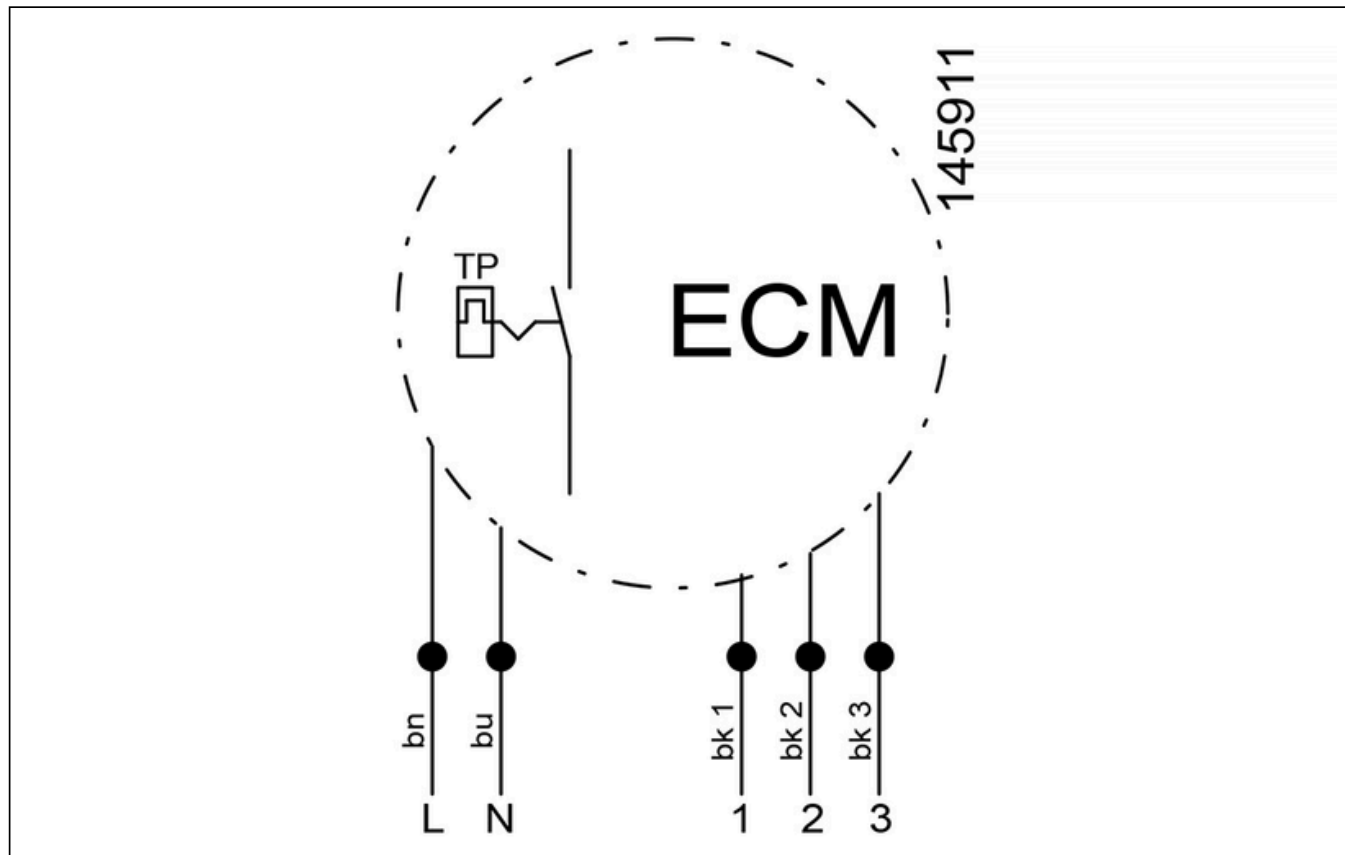

to the product detail page


MECHANICAL ACCESSORIES

FV 100 | 112678



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 100 | 112844



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 100 | 112849



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 100 | 102658



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 100D | 116061




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 100 | 102643



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 100 01 | 102894



- Protection grille for tube connection
- Galvanized wire

SDS 100 | 169602



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 100 | 169639



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, I_{max} = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature 50 °C
- Surface and flush mounting
- IP 44



to the product detail page