


EM 125L EC 01


145680

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- High efficiency IE5 EC motor, 3-steps controllable
- Conveyed medium temperature up to 40 °C in continuous operation
- The benchmark for efficiency since 2012

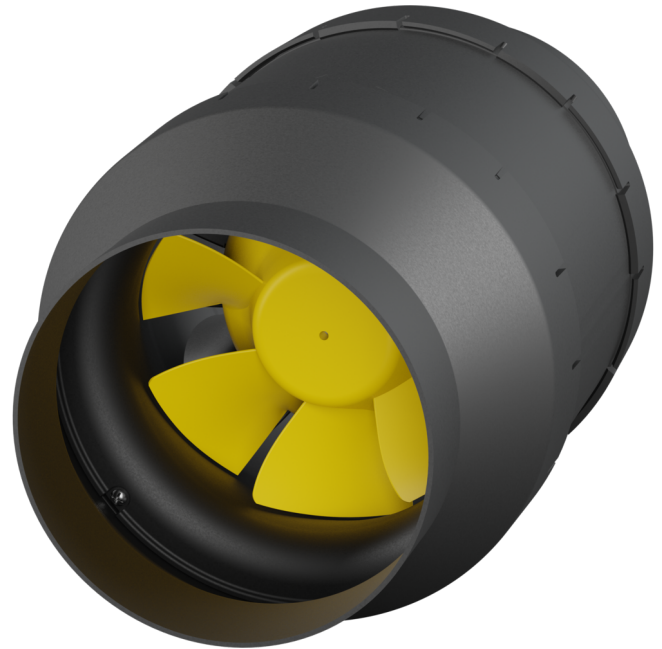

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

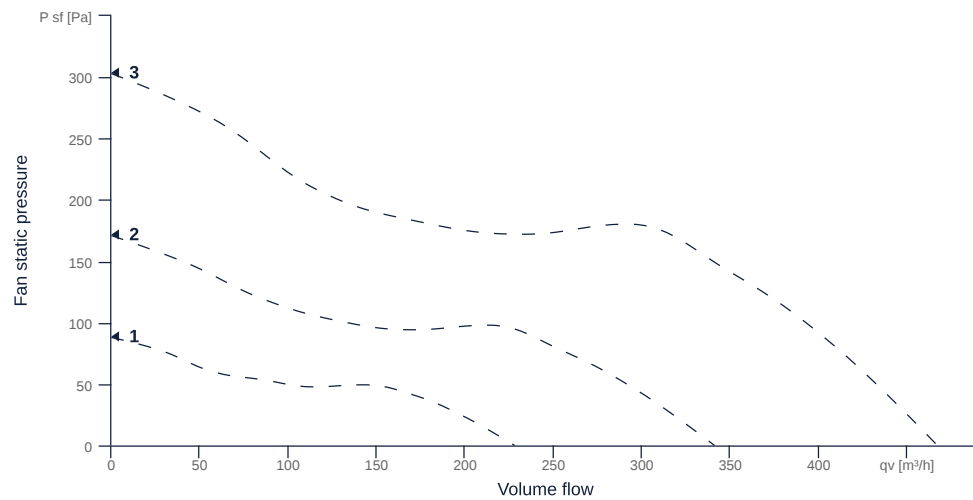

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN125		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX2		IP _{compl}
Weight	1.21	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	45	45	W	P _{ed, max}
Max. operating current (device)	0.41	0.41	A	I _{ed, max}
Max. speed	3810	3810	1/min	n _{max}
Max. stat. efficiency	33	33	%	η _{es}
Max. fan efficiency	38	38	%	η _e
Max. flowrate	460	460	m³/h	Q _{v, max}
Max. stat pressure	300	300	Pa	p _{sf, max}
Max. medium temperature	40	40	°C	T _{m, max}
Max. environment temperature	40	40	°C	T _{amb, max}



EM 125L EC 01

145680



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Shaft power	40		W	Pout, f1
Speed	3650		1/min	nf1
Efficiency	58		%	ηm, f1
UL-Certification motor		None		ULcert

ERP DATA (LOT11)


Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	3811	1/min	nopt
Efficiency level	39	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.04	kW	Pe, opt
Overall efficiency	64	%	ηges
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	181	Pa	pft, opt
Flowrate at energy efficiency optimum	287	m³/h	qv, opt

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

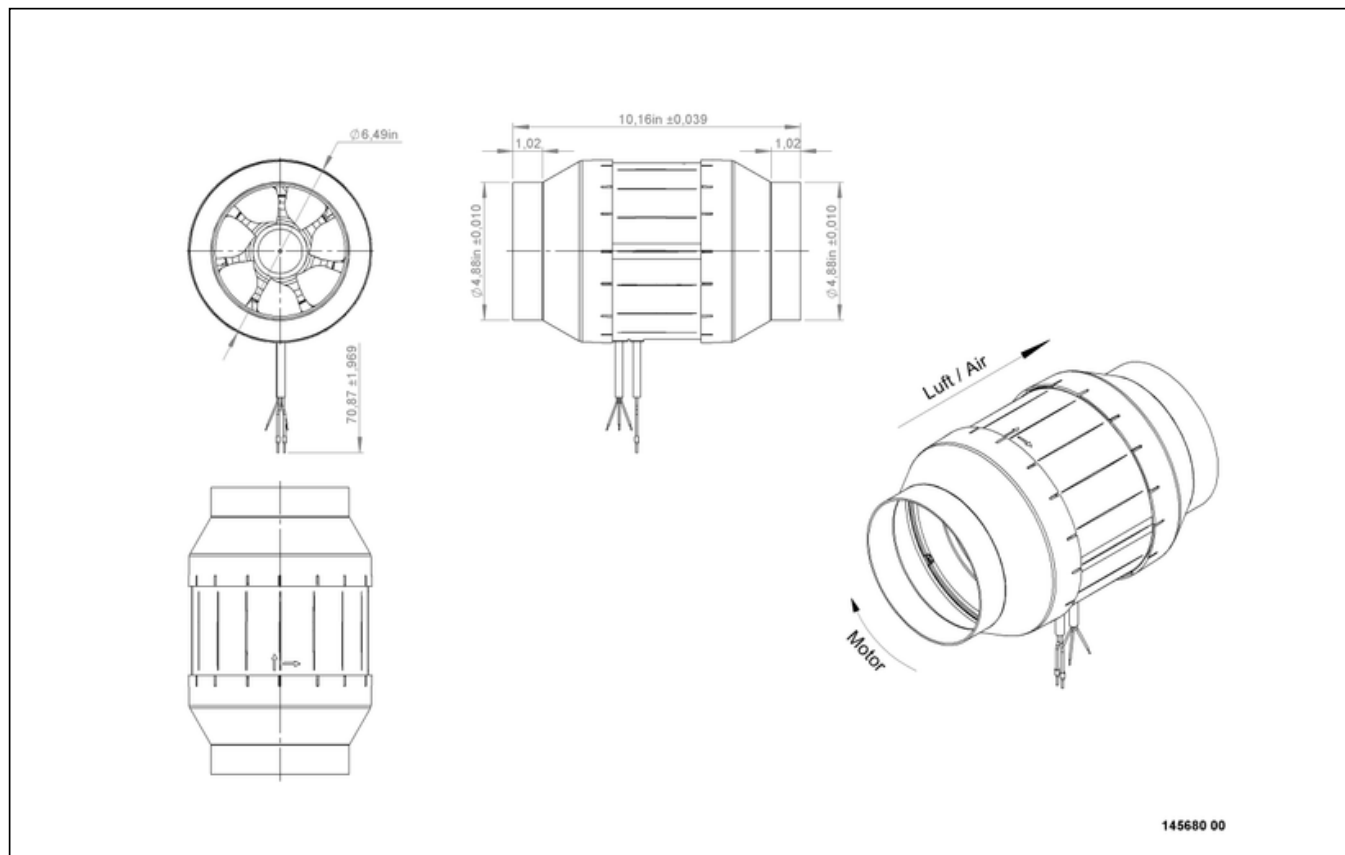

EM 125L EC 01

145680

ruck

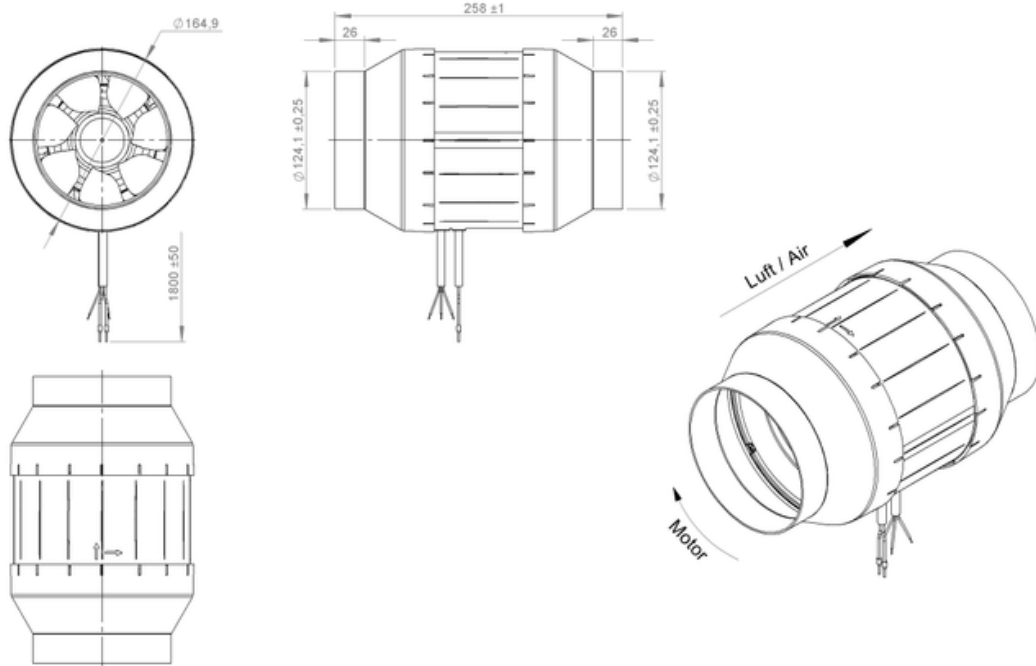

145680 00




to the product detail page

EM 125L EC 01

145680

ruck

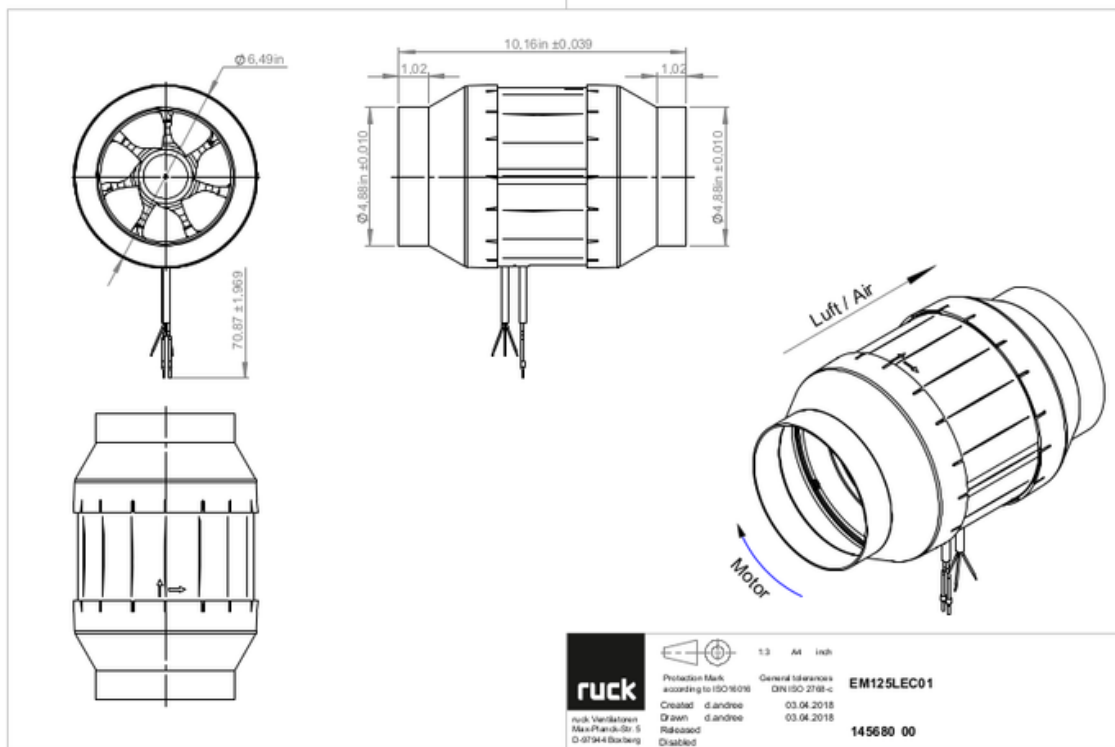


to the product detail page

EM 125L EC 01

145680


ruck

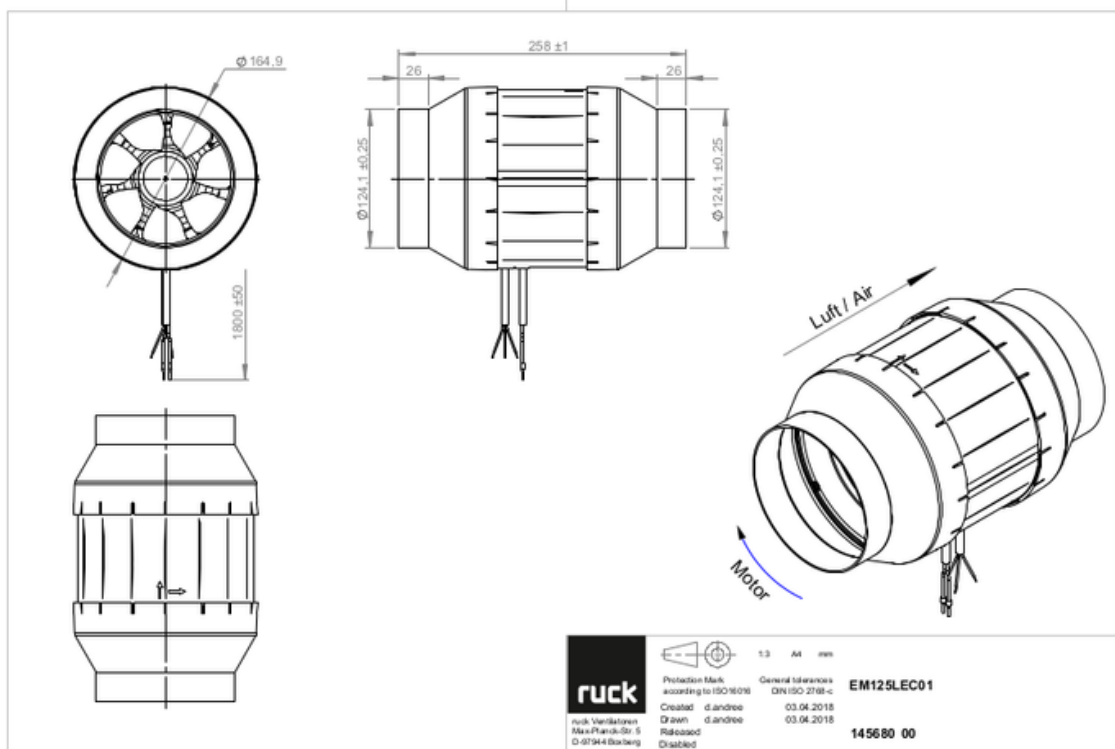

EM 125L EC 01

145680


ruck

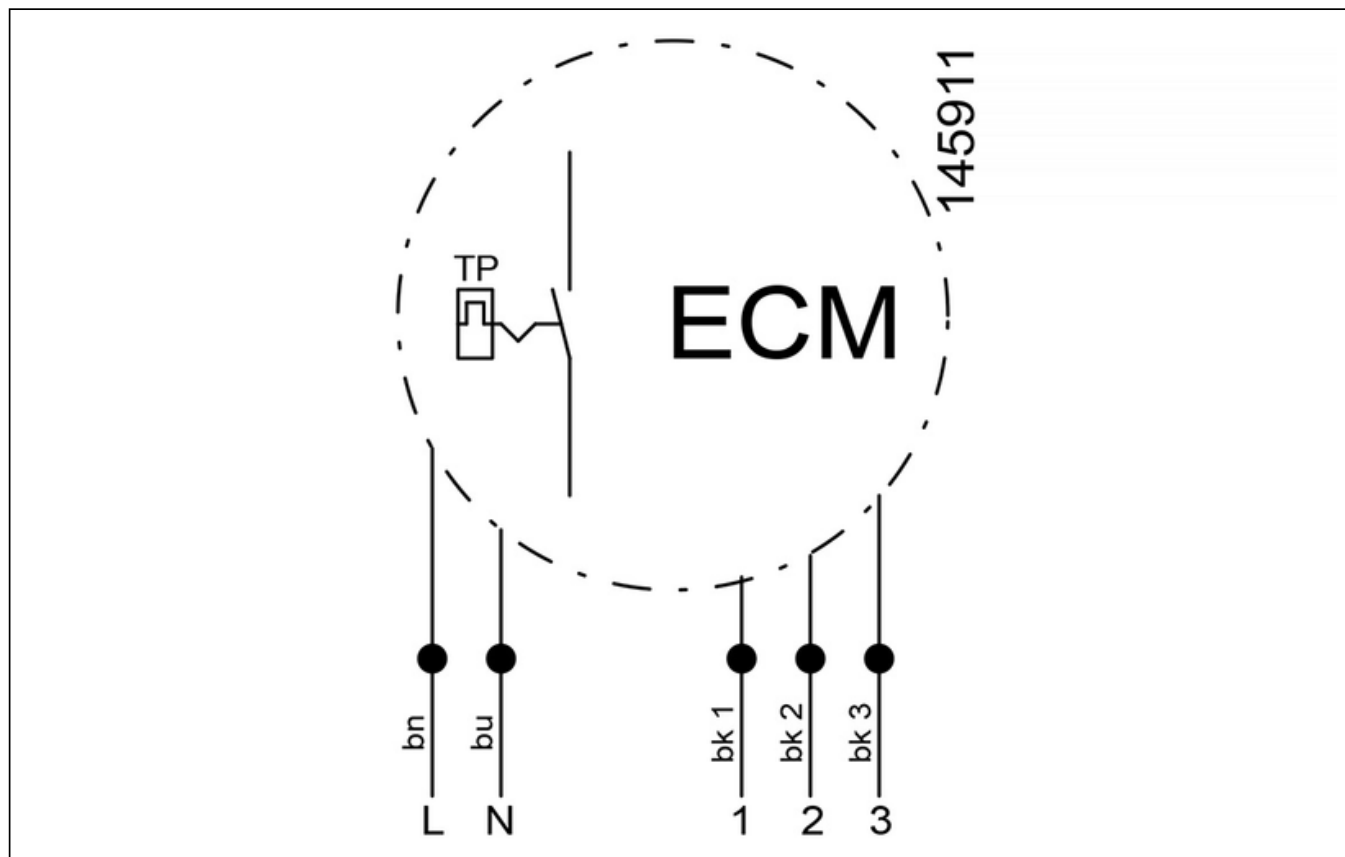

to the product detail page


MECHANICAL ACCESSORIES

FV 125 | 112679



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 125 | 112843



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 125 | 112850




- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 125 | 102179



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

SG 125 01 | 102895



- Protection grille for tube connection
- Galvanized wire

VM 125 | 102647



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

RSK 125D | 113483



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

SDS 125 | 169603



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 125 | 169640



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, I_{max} = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature 50 °C
- Surface and flush mounting
- IP 44



to the product detail page