

EM 150 E2 01


137588

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- Robust single phase AC motor
- Conveyed medium temperature up to 40 °C in continuous operation
- The benchmark for efficiency since 2012



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

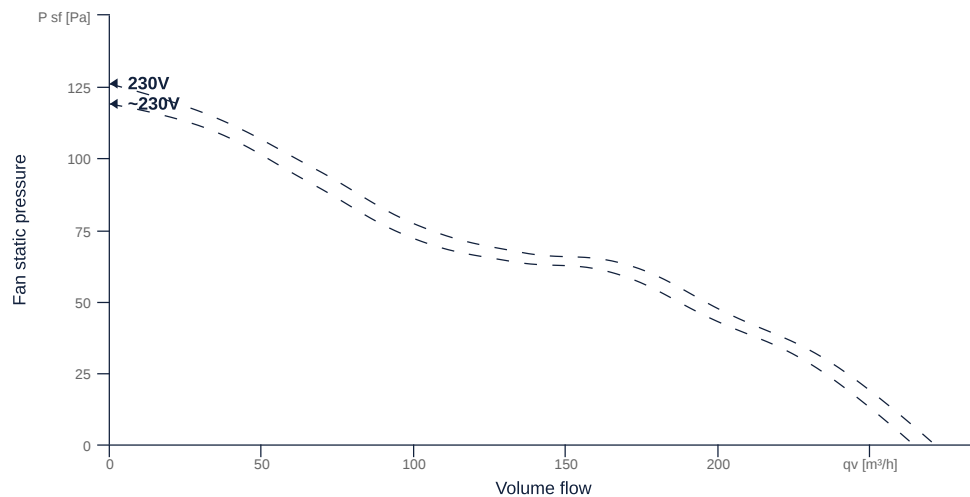

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN150		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX2		IP _{compl}
Weight	1.11	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	29	W	P _{ed, max}
Max. operating current (device)	0.29	A	I _{ed, max}
Max. speed	2600	1/min	n _{max}
Max. stat. efficiency	10	%	η _{es}
Max. fan efficiency	10.6	%	η _e
Max. flowrate	270	m ³ /h	Q _{v, max}
Max. stat pressure	125	Pa	p _{sf, max}
Max. medium temperature	40	°C	T _{m, max}
Max. environment temperature	40	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		Split pole		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwsupmotor
Rated voltage	230		V	U _{rated, f1}
Rated current	0.18		A	I _{rated, f1}
Nominal power	24		W	P _a
Speed	2800		1/min	n _{f1}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2525	1/min	n _{opt}
Efficiency level	9.9	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.03	kW	P _{e, opt}
Overall efficiency	36.7	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	59	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	178	m³/h	q _{v, opt}

SMOKE EXTRACT DATA


Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



EM 150 E2 01

137588

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

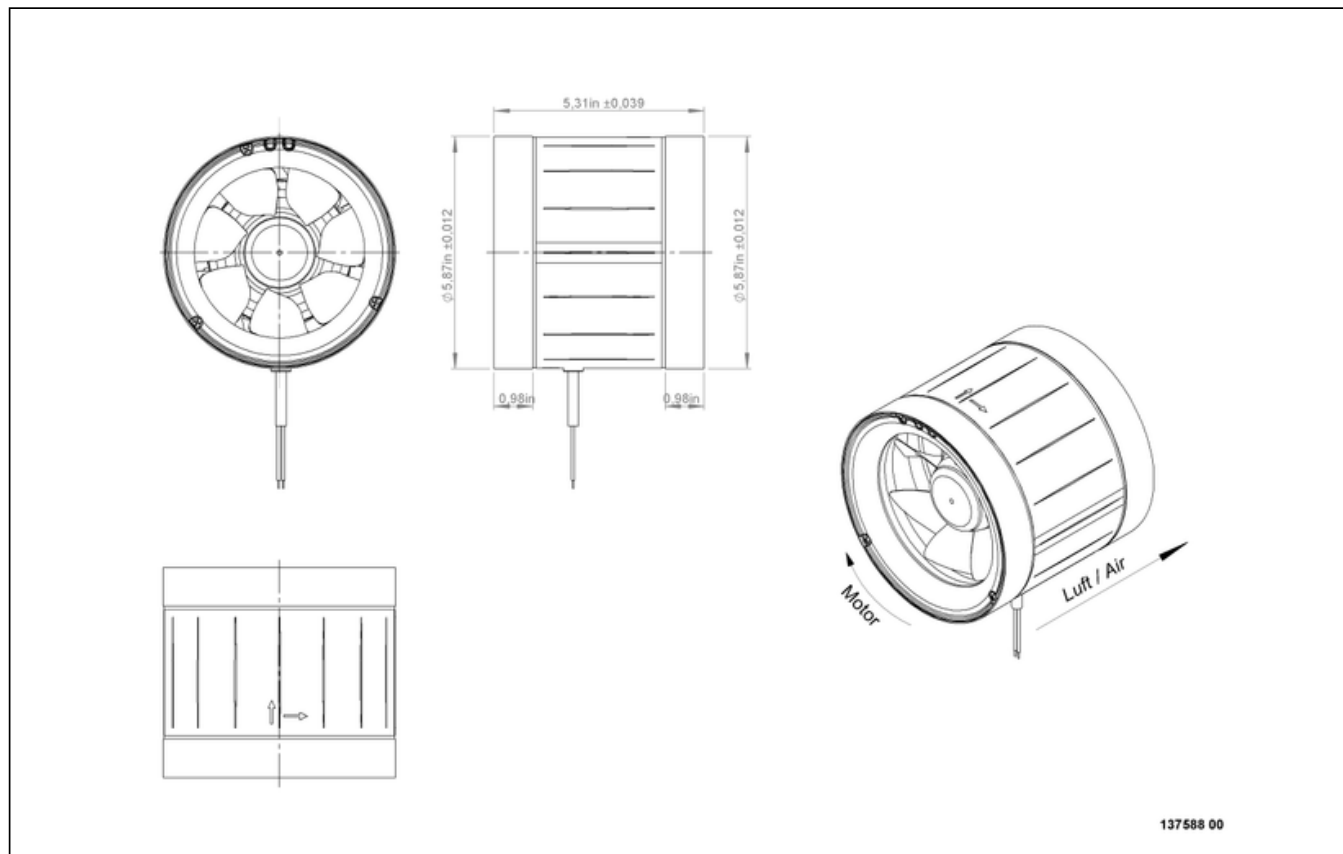


to the product detail page

EM 150 E2 01

137588

ruck

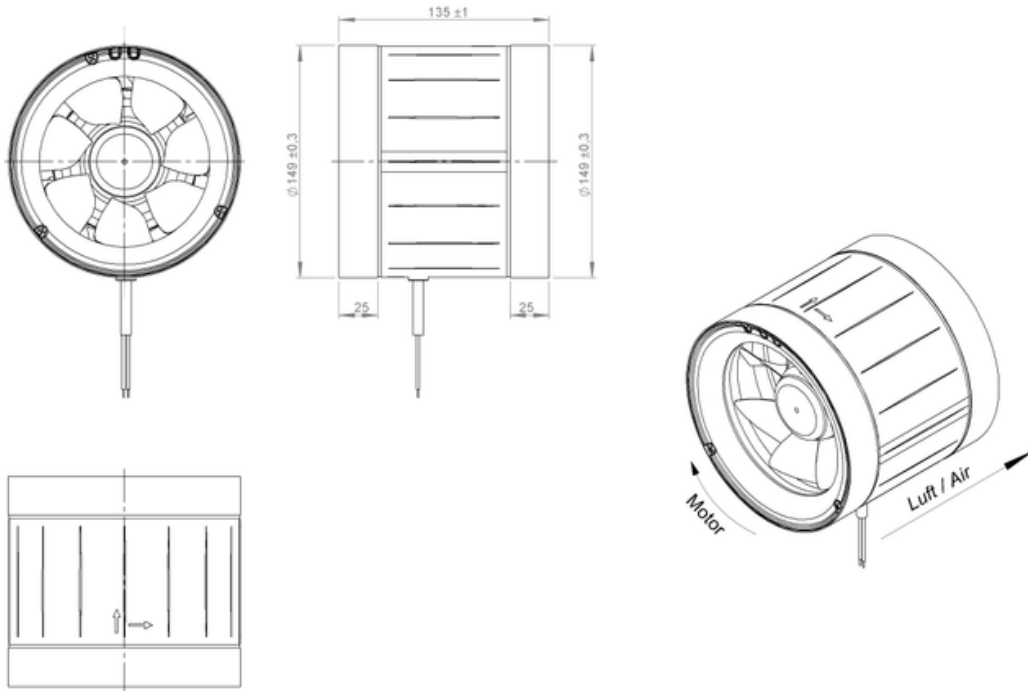


137588 00



to the product detail page

EM 150 E2 01


137588

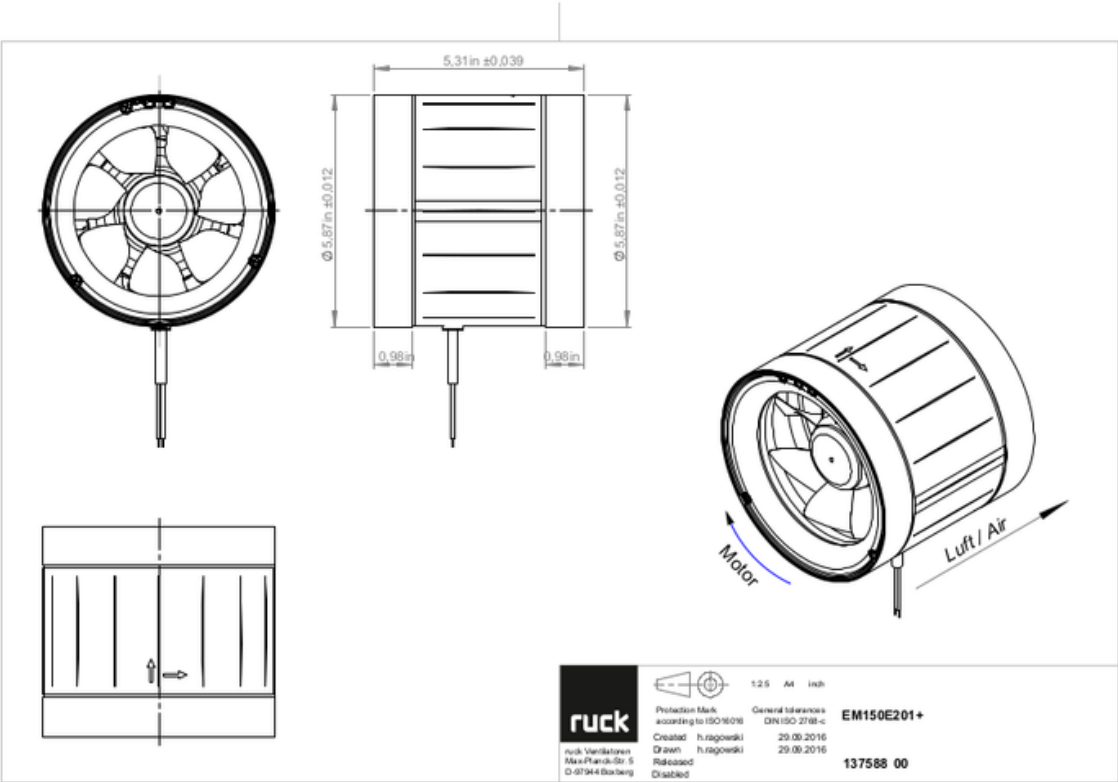

to the product detail page

EM 150 E2 01


137588

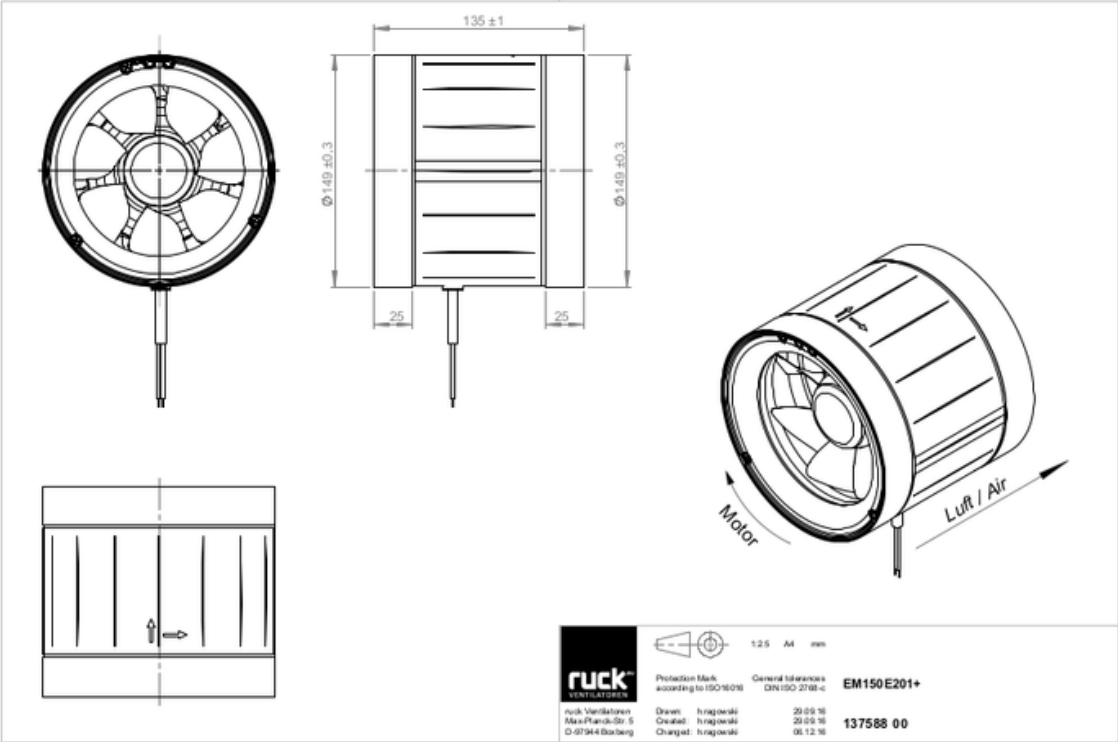

to the product detail page

EM 150 E2 01

137588

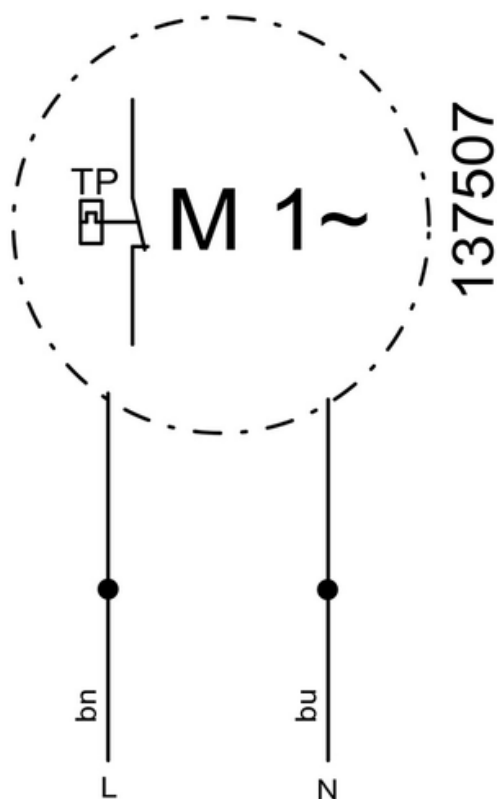

to the product detail page