

EM 160L EC 01


128586

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- High efficiency IE5 EC motor, steplessly controllable
- Incl. 1x potentiometer for connection in terminal box
- Conveyed medium temperature up to 45 °C in continuous operation
- The benchmark for efficiency since 2012



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

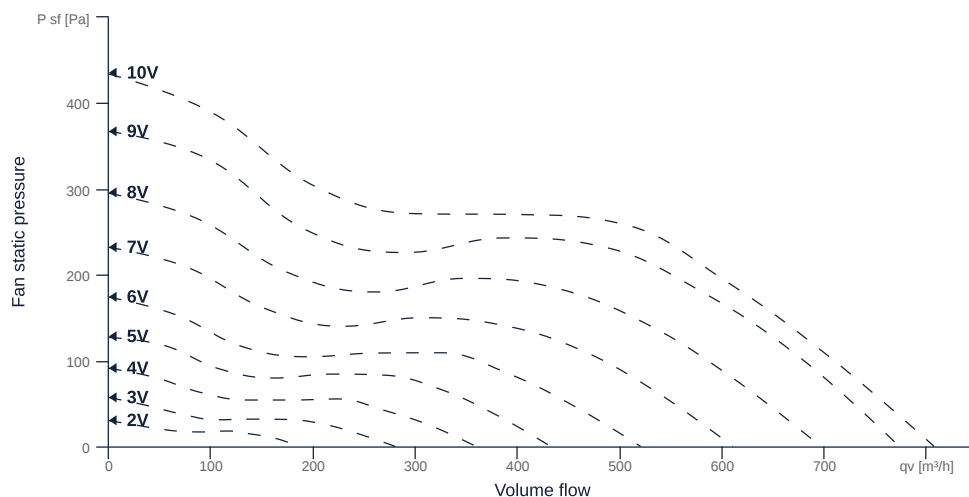

to the product detail page

EM 160L EC 01

128586

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN160		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	2.6	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	73	73	w	P _{ed, max}
Max. operating current (device)	0.65	0.65	A	I _{ed, max}
Max. speed	3730	3730	rpm	n _{max}
Max. stat. efficiency	47.7	47.7	p	η _{es}
Max. fan efficiency	52.8	52.8	p	η _e
Max. flowrate	810	810	CmH	q _{v, max}
Max. stat pressure	430	430	Pa	p _{sf, max}
Max. medium temperature	45	45	°C	T _{m, max}
Max. environment temperature	45	45	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}



EM 160L EC 01

128586

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230		v	U _{rated, f1}
Rated current	0.56		A	I _{rated, f1}
Nominal power	70		w	P _a
Speed	3655		rpm	n _{f1}
Min. temperature	-30		°C	T _{motor, min}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	3605	rpm	n _{opt}
Efficiency level	55.9	p	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.07	kw	P _{e, opt}
Overall efficiency	78.6	p	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	260	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	502	CmH	Q _{v, opt}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

EM 160L EC 01

128586

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

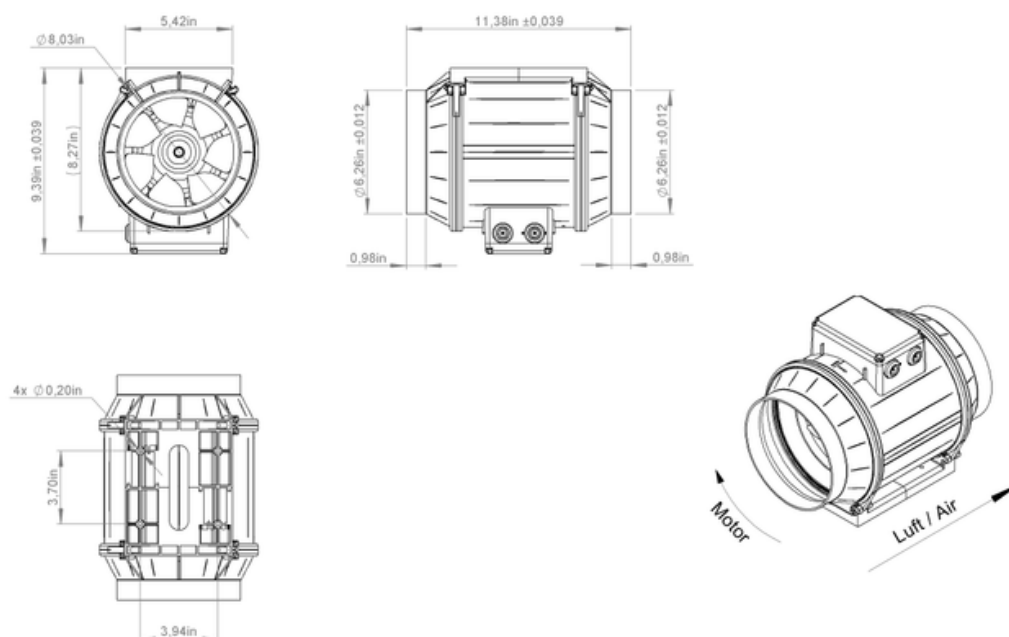

128586 04




to the product detail page

EM 160L EC 01

128586

ruck

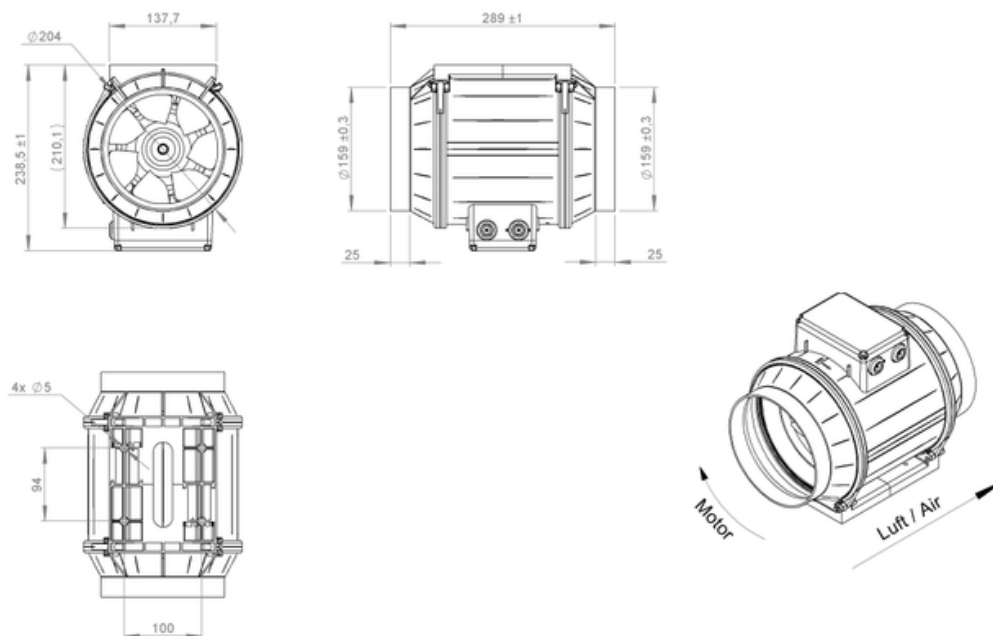

128586 04




to the product detail page

EM 160L EC 01

128586


ruck

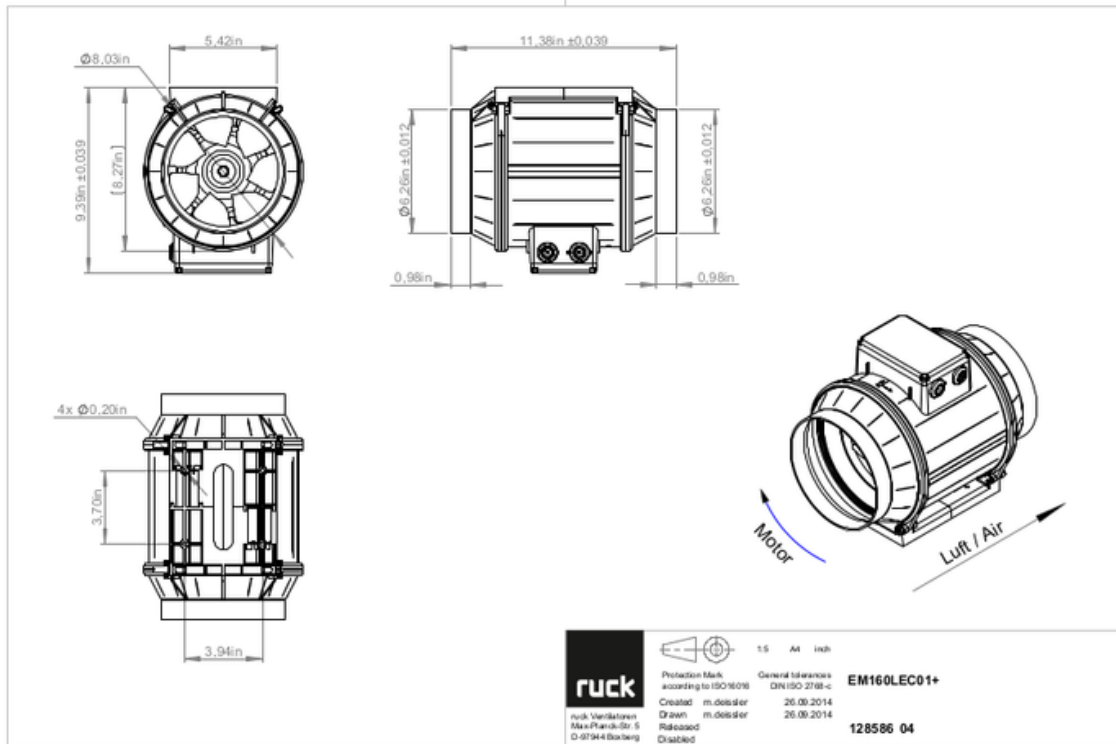

EM 160L EC 01


128586

ruck

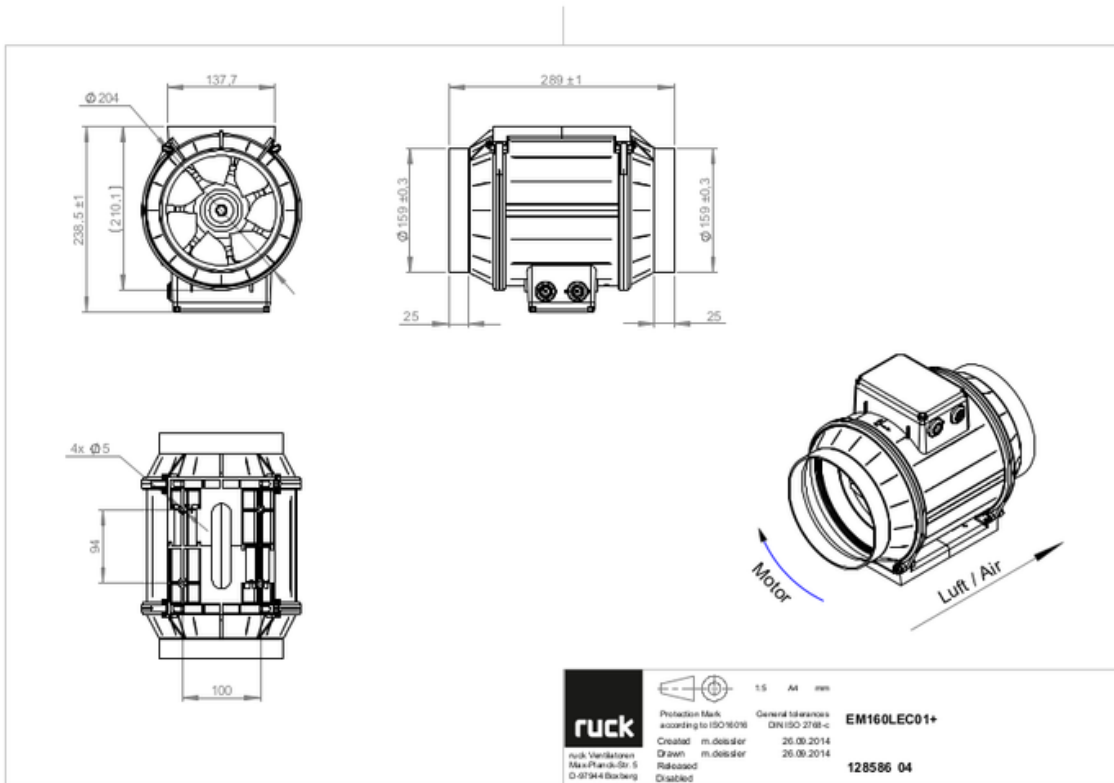

EM 160L EC 01

128586

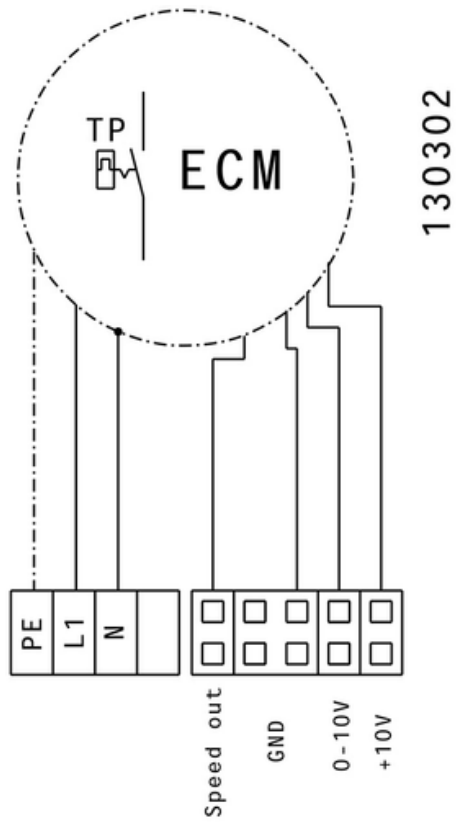

to the product detail page