

EM 200 E2M 01


127249

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- Robust AC motor, 3-steps controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- The benchmark for efficiency since 2012



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

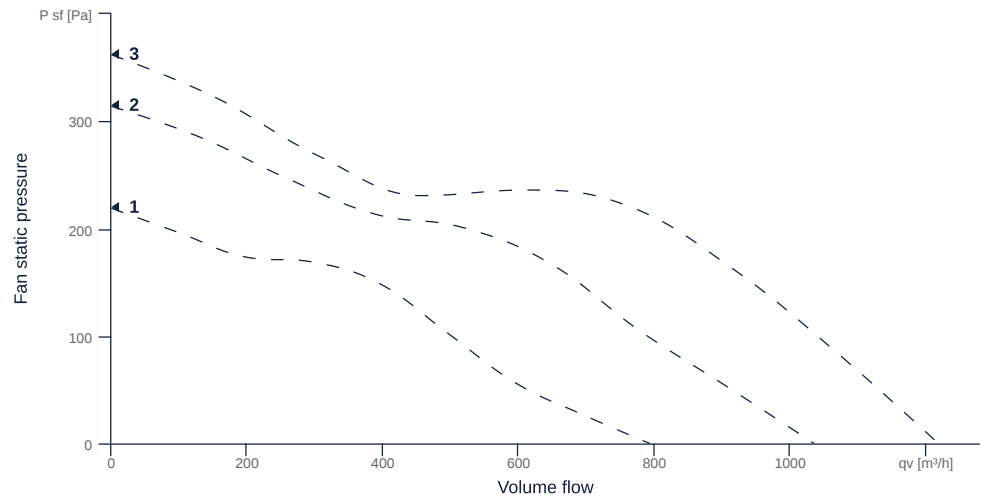

to the product detail page

EM 200 E2M 01

127249

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN200		DN
Rated voltage (entire device)	230	V	U_{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP44		IPebox
Weight	3.77	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	117	W	$P_{ed, max}$
Max. operating current (device)	0.58	A	$I_{ed, max}$
Max. speed	2850	1/min	n_{max}
Max. stat. efficiency	40.9	%	η_{es}
Max. fan efficiency	45.5	%	η_e
Max. flowrate	1220	m³/h	$Q_{v, max}$
Max. stat pressure	360	Pa	$p_{sf, max}$
Max. medium temperature	60	°C	$T_{m, max}$
Max. environment temperature	60	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$
Min. voltage	230	V	U_{min}
Stall current	0.96	A	I_{LRA}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protect _{motor}
Protection class		IP00		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 1~		pwr _{sup} _{motor}
Capacity capacitor		3.5	µF	C _{cond}
Voltage capacitor		450	V	VU _{cond}
Number of poles (1)		2.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.5		A	I _{rated, f1}
Shaft power	50		W	P _{out, f1}
UL-Certification motor		None		UL _{cert}

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2741	1/min	n _{opt}
Efficiency level	40.7	%	N
Efficiency category	statisch		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	0.11	kW	P _{e, opt}
Overall efficiency	61.3	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	224	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	748	m³/h	Q _{v, opt}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

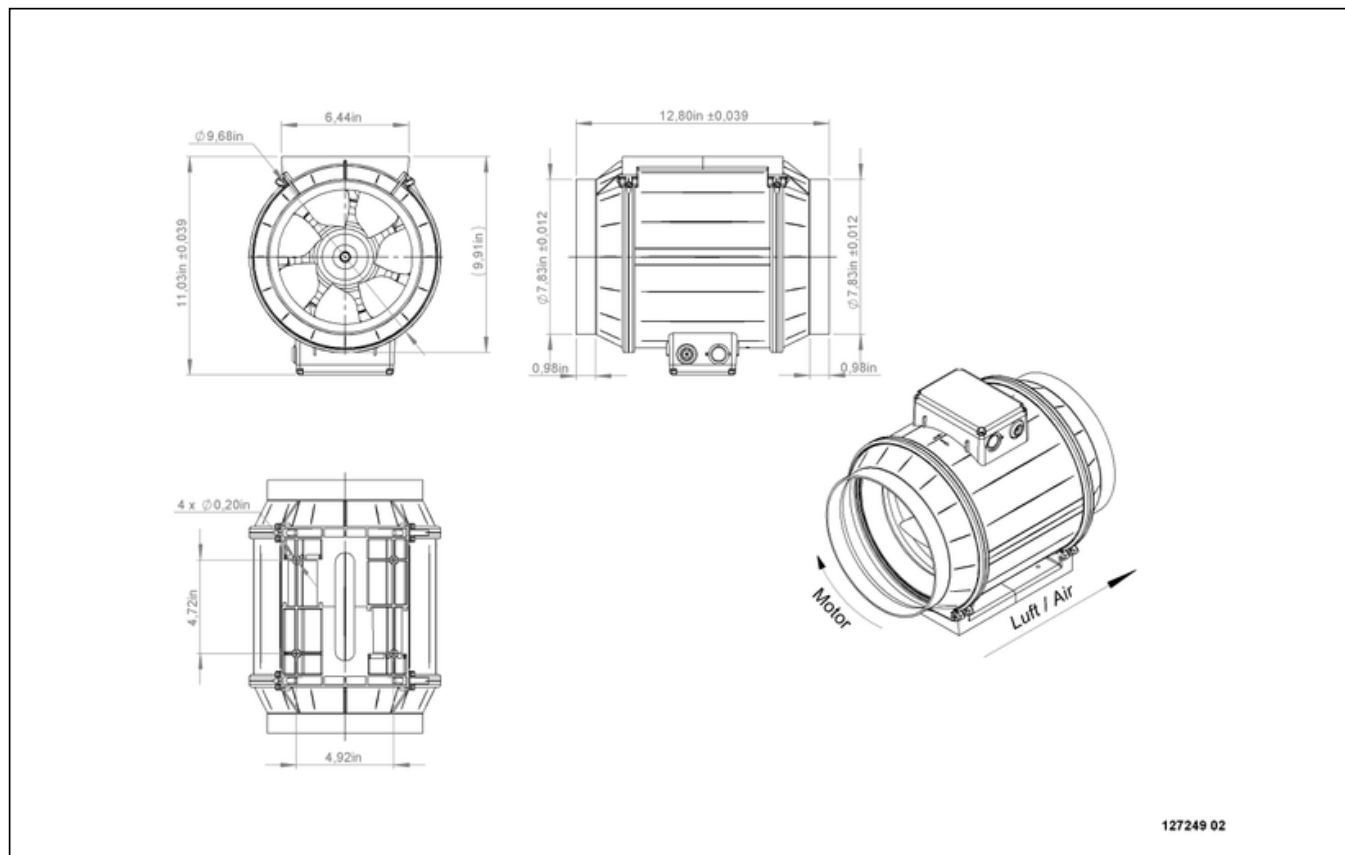

EM 200 E2M 01

127249

ruck

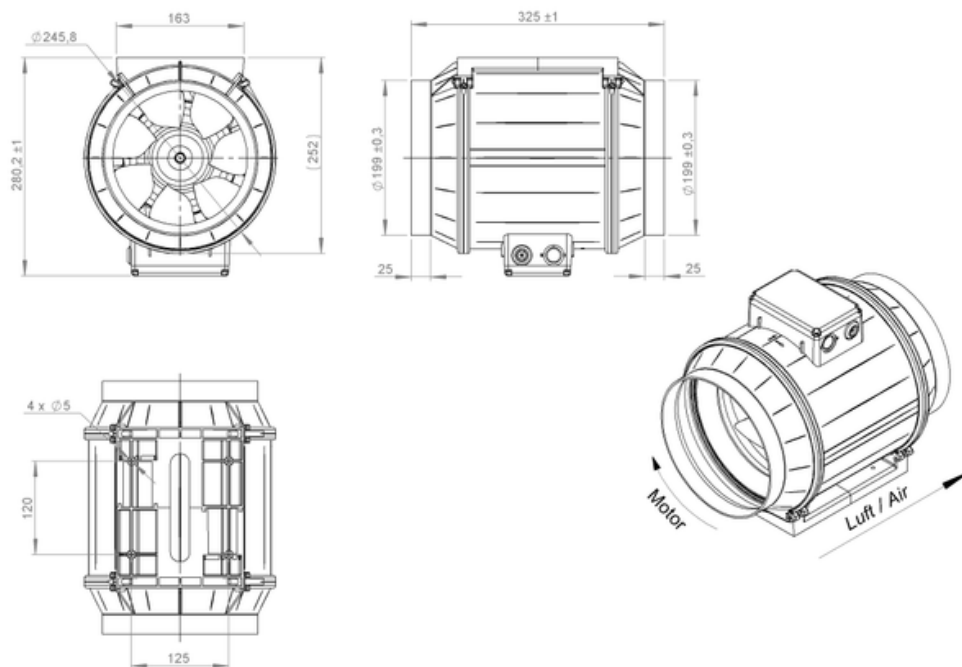

127249 02




to the product detail page

EM 200 E2M 01

127249


ruck

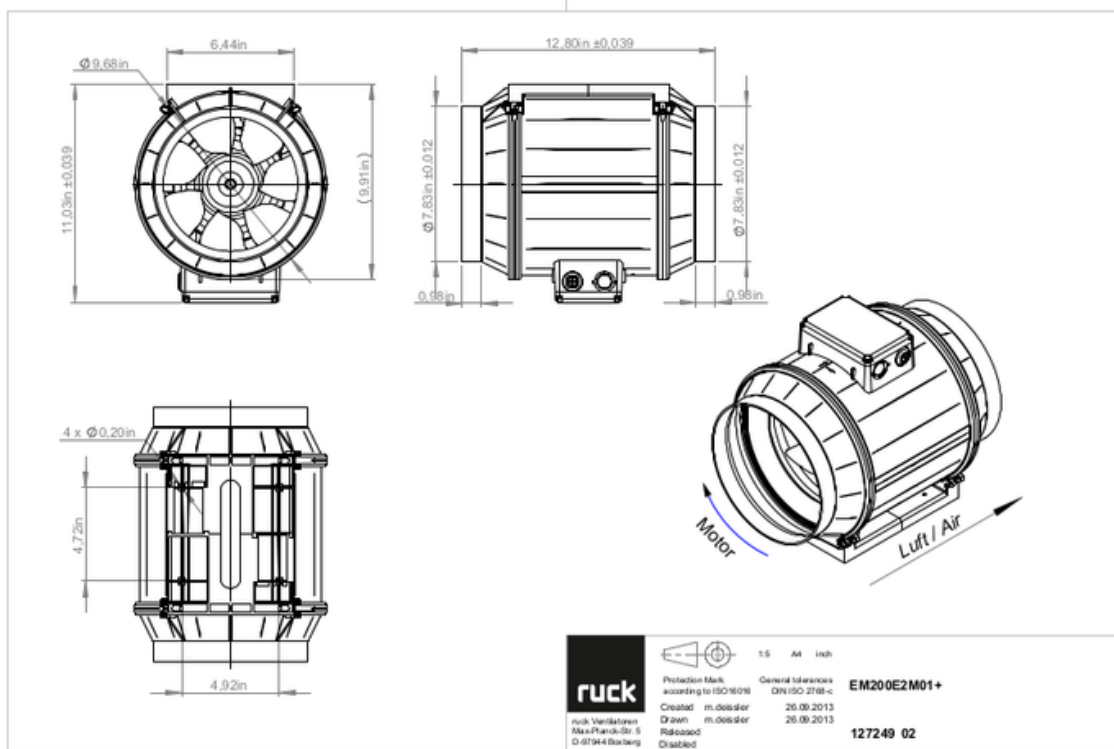

EM 200 E2M 01

127249


ruck

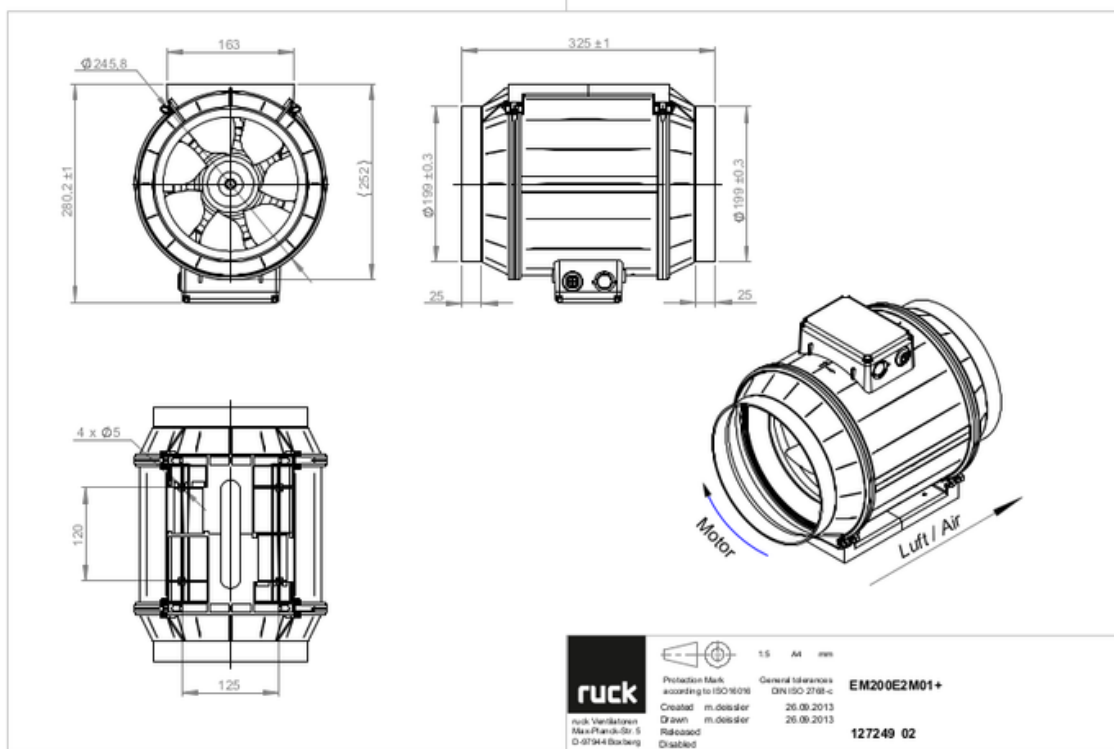

EM 200 E2M 01

127249


ruck

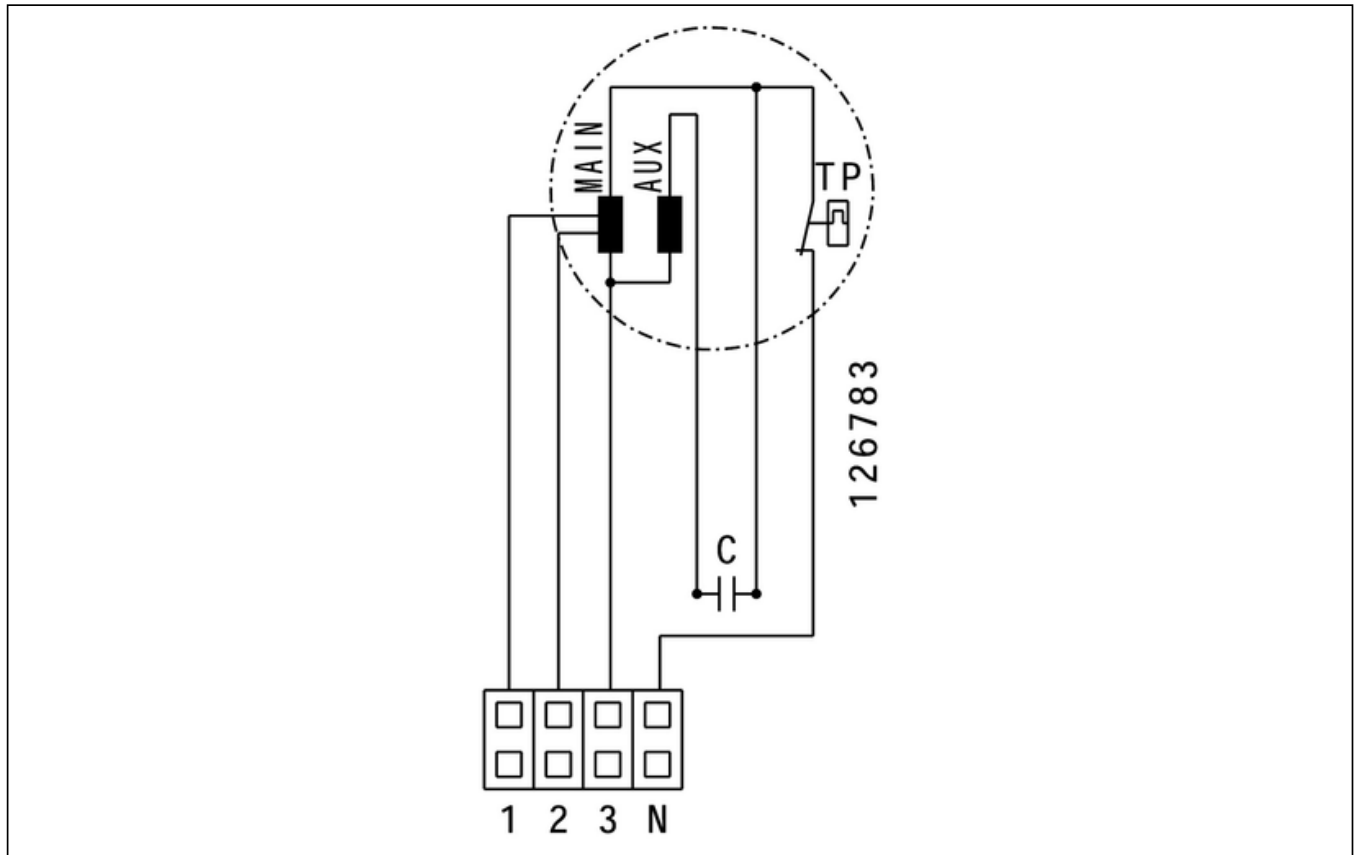

to the product detail page


MECHANICAL ACCESSORIES

FV 200 | 112832



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 200 | 112840



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 200 | 112853



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 200 | 102662



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 200D | 113487




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 200 | 102650



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 200 01 | 169589



- Protection grille for tube connection
- Galvanized wire

SDS 200 | 169606



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 200 | 169643



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, I_{max} = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature 50 °C
- Surface and flush mounting
- IP 44



to the product detail page