

EM 250 E2M 01


127317

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- Robust AC motor, 3-steps controllable
- Conveyed medium temperature up to 50 °C in continuous operation
- The benchmark for efficiency since 2012



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

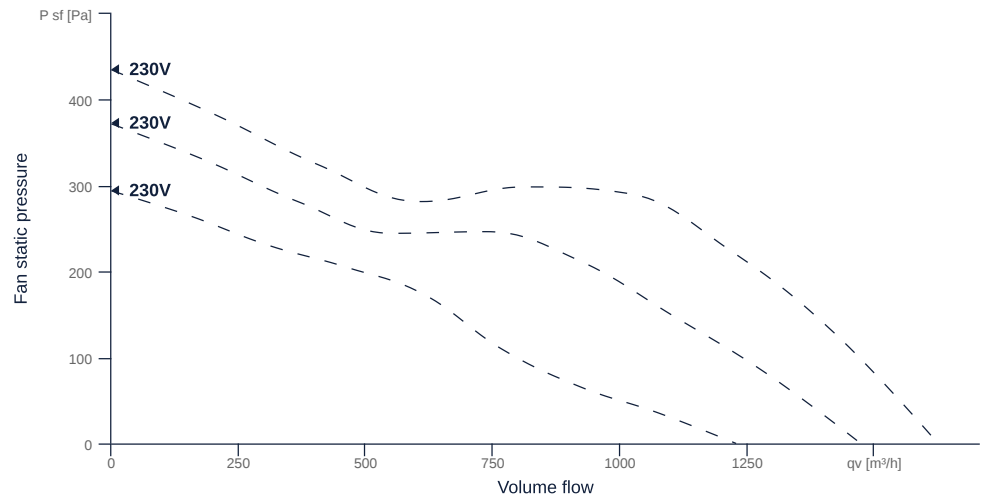

to the product detail page

EM 250 E2M 01

127317

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	V	U_{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP44		IPebox
Weight	5.88	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	170	W	$P_{ed, max}$
Max. operating current (device)	0.81	A	$I_{ed, max}$
Max. speed	2880	1/min	n_{max}
Max. stat. efficiency	46.6	%	η_{es}
Max. fan efficiency	49.5	%	η_e
Max. flowrate	1625	m ³ /h	$Q_{v, max}$
Max. stat pressure	435	Pa	$p_{sf, max}$
Max. medium temperature	50	°C	$T_{m, max}$
Max. environment temperature	50	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$
Min. voltage	230	V	U_{min}
Stall current	2.3	A	I_{LRA}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protect _{motor}
Protection class		IP00		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 1~		pwr _{sup} _{motor}
Capacity capacitor		5	µF	C _{cond}
Voltage capacitor		450	V	VU _{cond}
Number of poles (1)		2.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.75		A	I _{rated, f1}
Shaft power	100		W	P _{out, f1}
UL-Certification motor		None		UL _{cert}

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2822	1/min	n _{opt}
Efficiency level	46	%	N
Efficiency category	statisch		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	0.17	kW	P _{e, opt}
Overall efficiency	64.6	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	278	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1066	m³/h	q _{v, opt}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

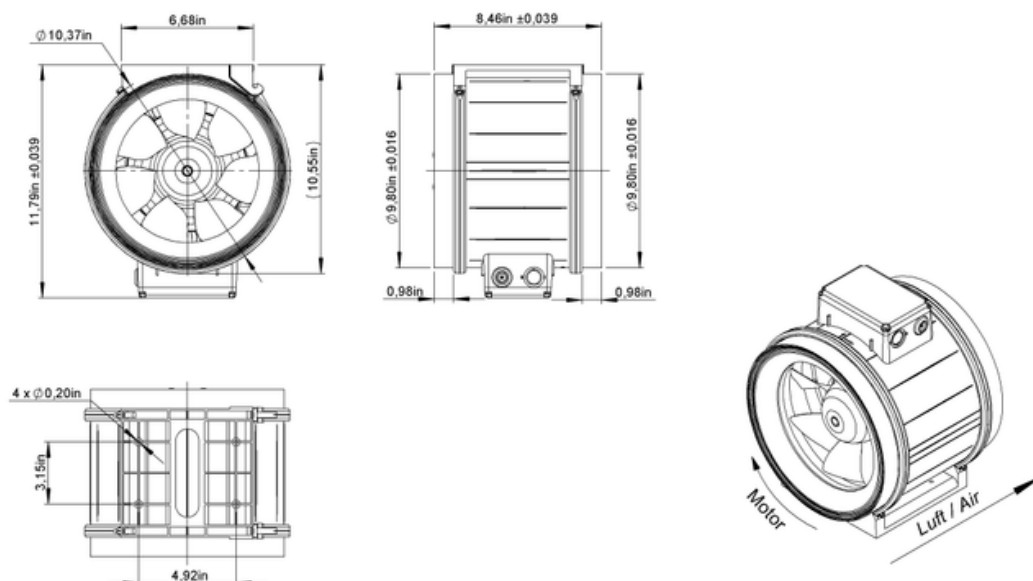

127317 03







to the product detail page

EM 250 E2M 01

127317

ruck



127317 03




to the product detail page

EM 250 E2M 01

127317


ruck

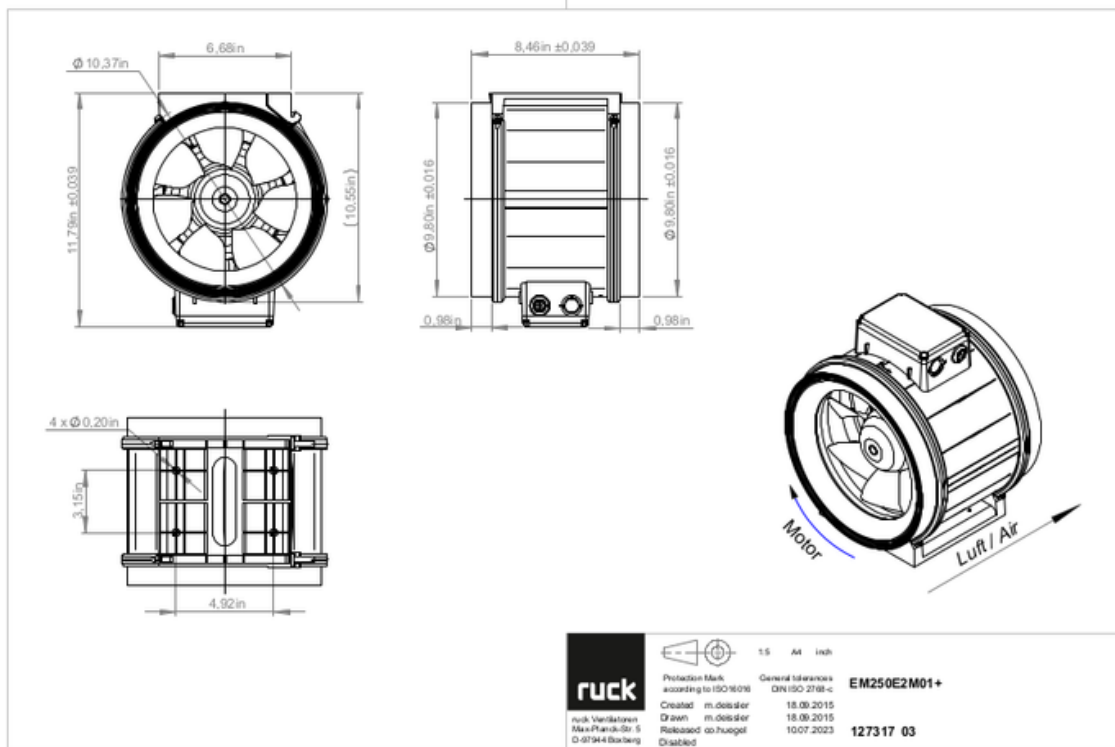

EM 250 E2M 01

127317


ruck

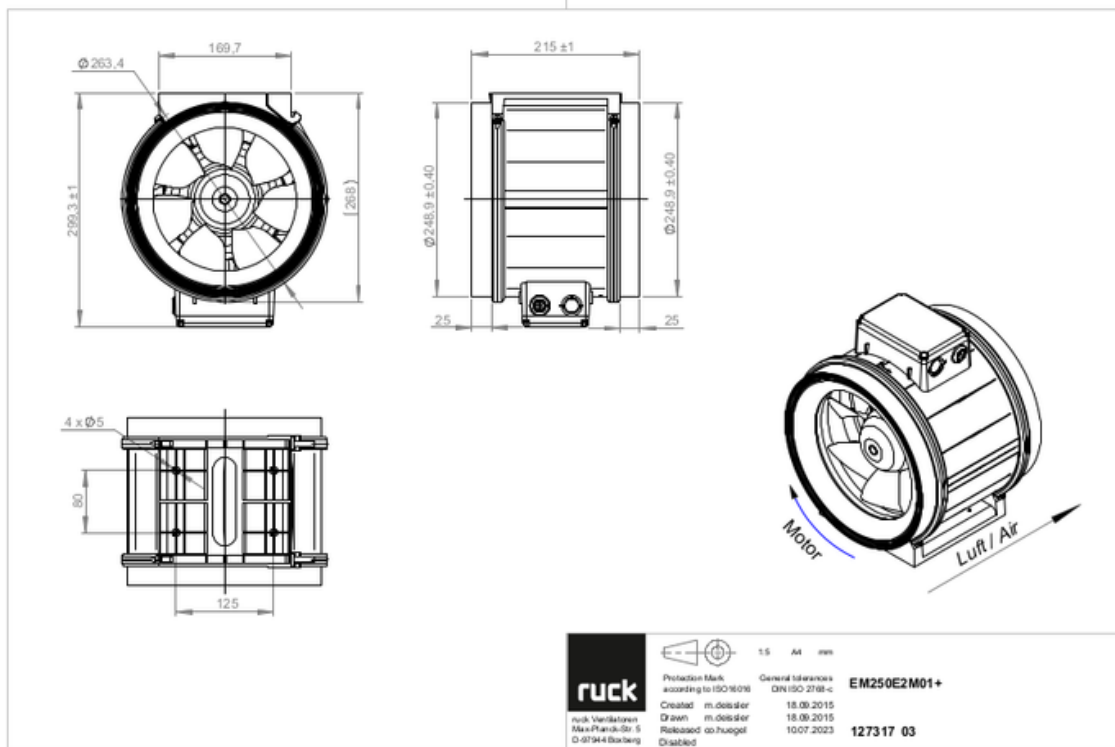

EM 250 E2M 01

127317


ruck

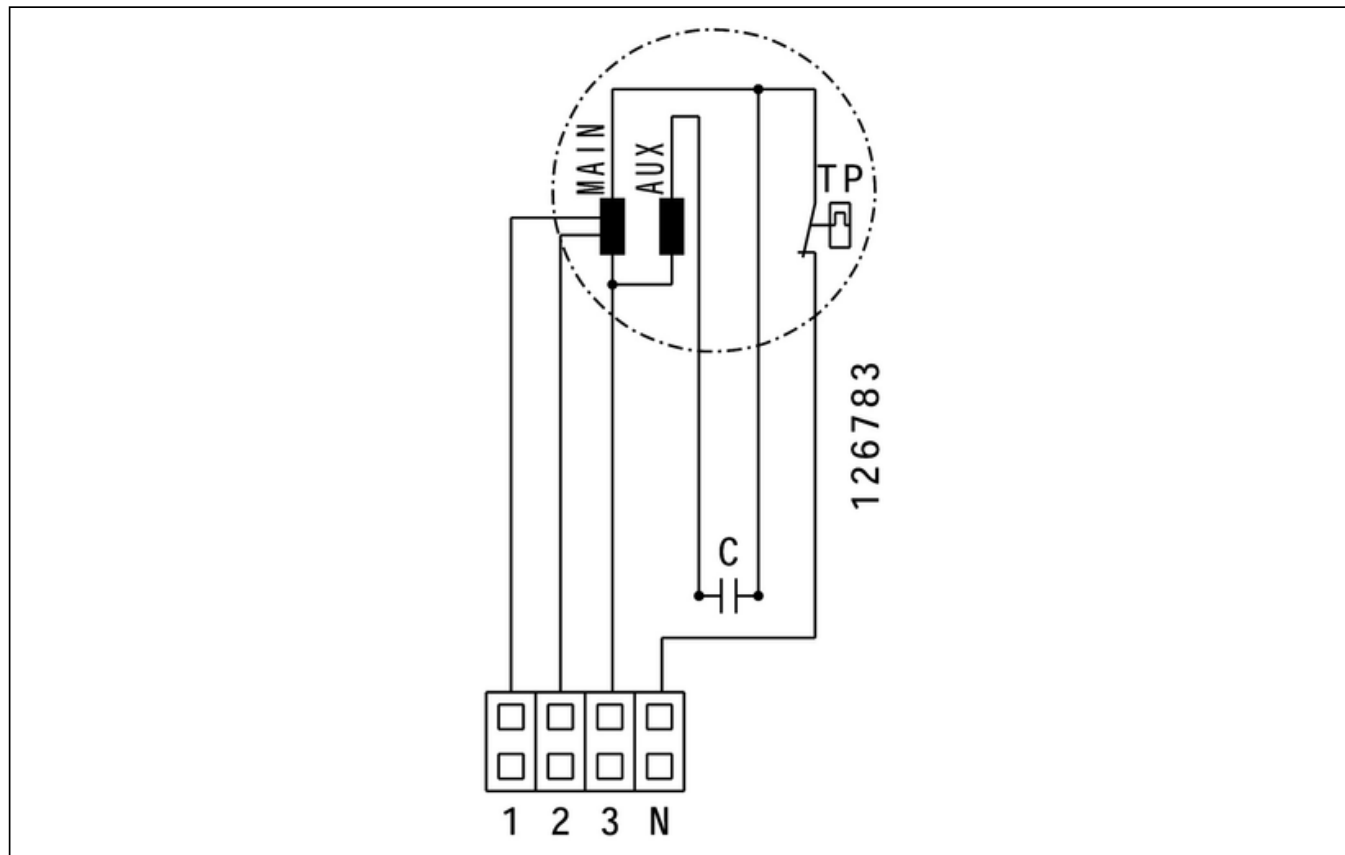

to the product detail page

MECHANICAL ACCESSORIES

FV 250 | 112833



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 250 | 112845



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 250 | 112854



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 250D | 113488



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

KWR 250 02 | 124066



- Cold water cooler, uninsulated
- Version left
- Connection ND 250
- Galvanized steel sheet with condensate tray

RSK 250 | 102686




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

KWR 250 01 | 124065



- Cold water cooler, uninsulated
- Version right
- Connection ND 250
- Galvanized steel sheet with condensate tray

SG 250 01 | 169588



- Protection grille for tube connection
- Galvanized wire

SDS 250 | 169607



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 250 | 169644



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, Imax = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature 50 °C
- Surface and flush mounting
- IP 44

