

EM 250 E2M 01


127317

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- Robust AC motor, 3-steps controllable
- Conveyed medium temperature up to 50 °C in continuous operation
- The benchmark for efficiency since 2012



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

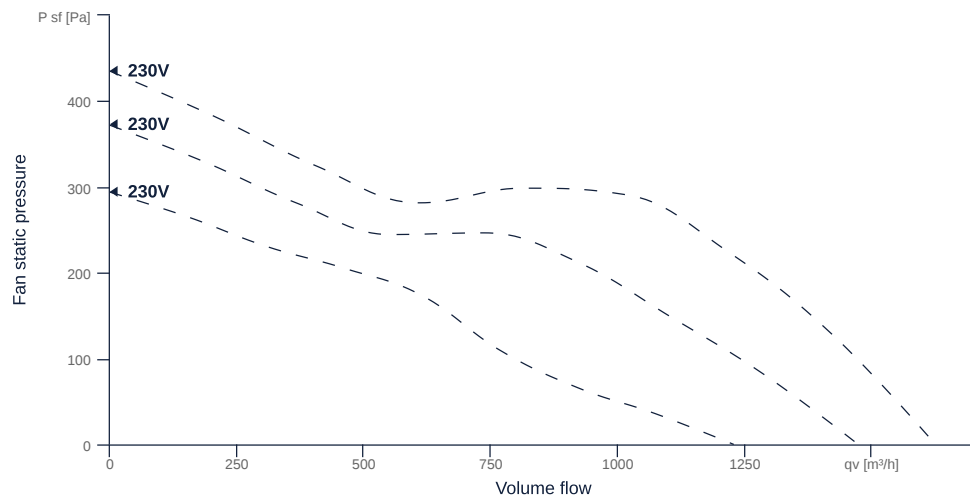

to the product detail page

EM 250 E2M 01

127317

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	5.88	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	170	w	P _{ed, max}
Max. operating current (device)	0.81	A	I _{ed, max}
Max. speed	2880	rpm	n _{max}
Max. stat. efficiency	46.6	p	η _{es}
Max. fan efficiency	49.5	p	η _e
Max. flowrate	1625	CmH	Q _{v, max}
Max. stat pressure	435	Pa	p _{sf, max}
Max. medium temperature	50	°C	T _{m, max}
Max. environment temperature	50	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	230	v	U _{min}
Stall current	2.3	A	I _{LRA}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		5	µF	Ccond
Voltage capacitor		450	v	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		v	Urated, f1
Rated current	0.75		A	Irated, f1
Nominal power	100		w	Pa
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2822	rpm	nopt
Efficiency level	46	p	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.17	kw	Pe, opt
Overall efficiency	64.6	p	ηges
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	278	Pa	pt, opt
Flowrate at energy efficiency optimum	1066	CmH	Qv, opt

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

EM 250 E2M 01

127317

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

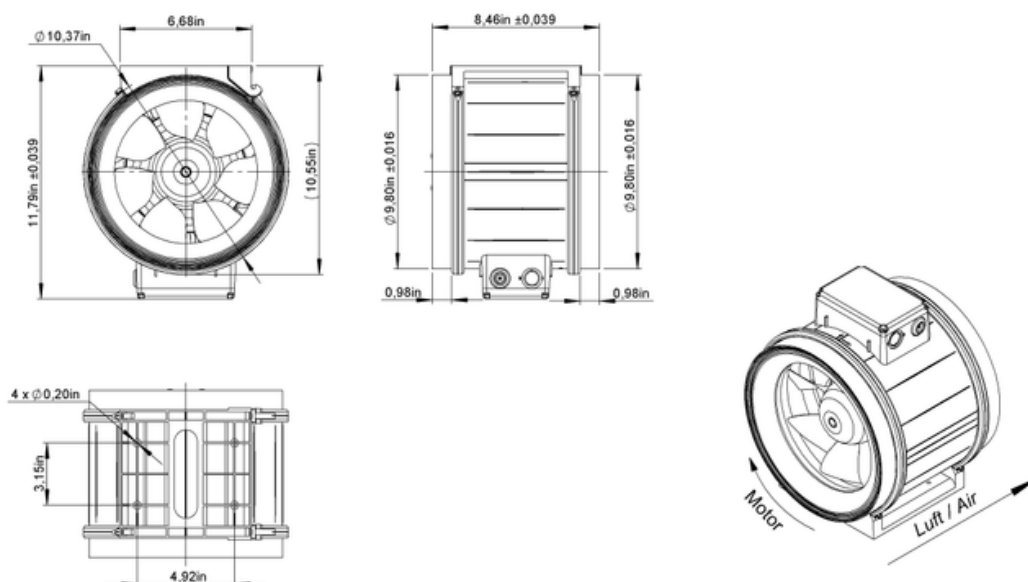

127317 03







to the product detail page

EM 250 E2M 01

127317

ruck




127317 03



to the product detail page

EM 250 E2M 01


127317

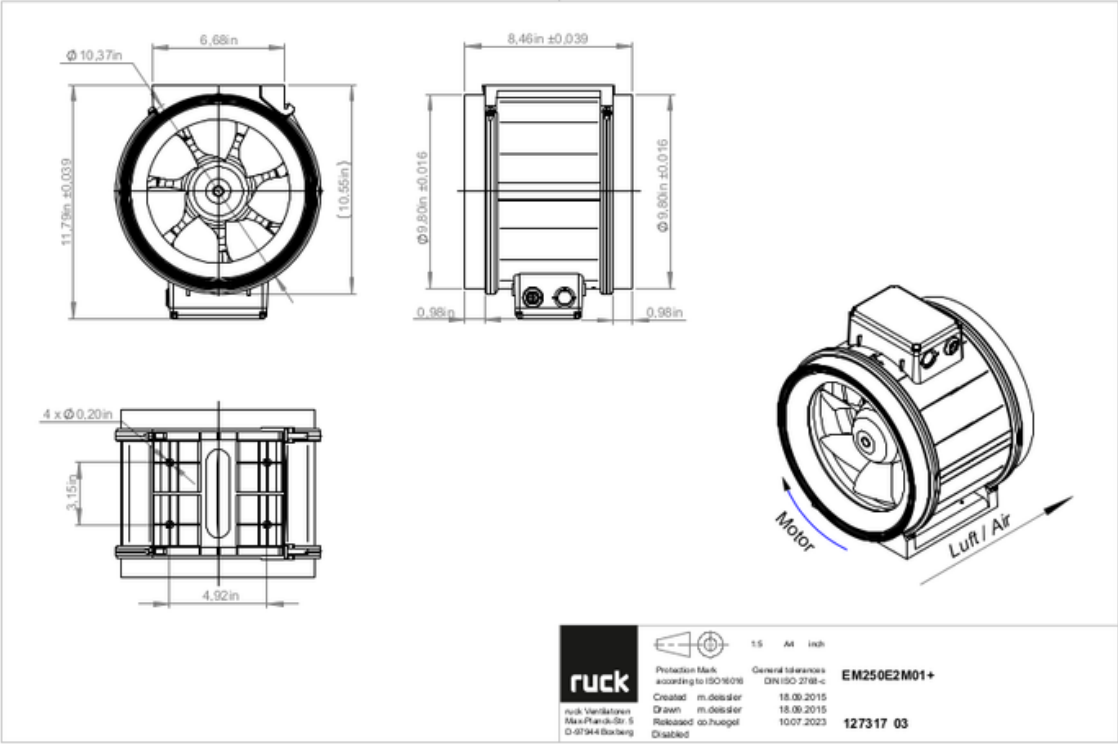

to the product detail page

EM 250 E2M 01


127317

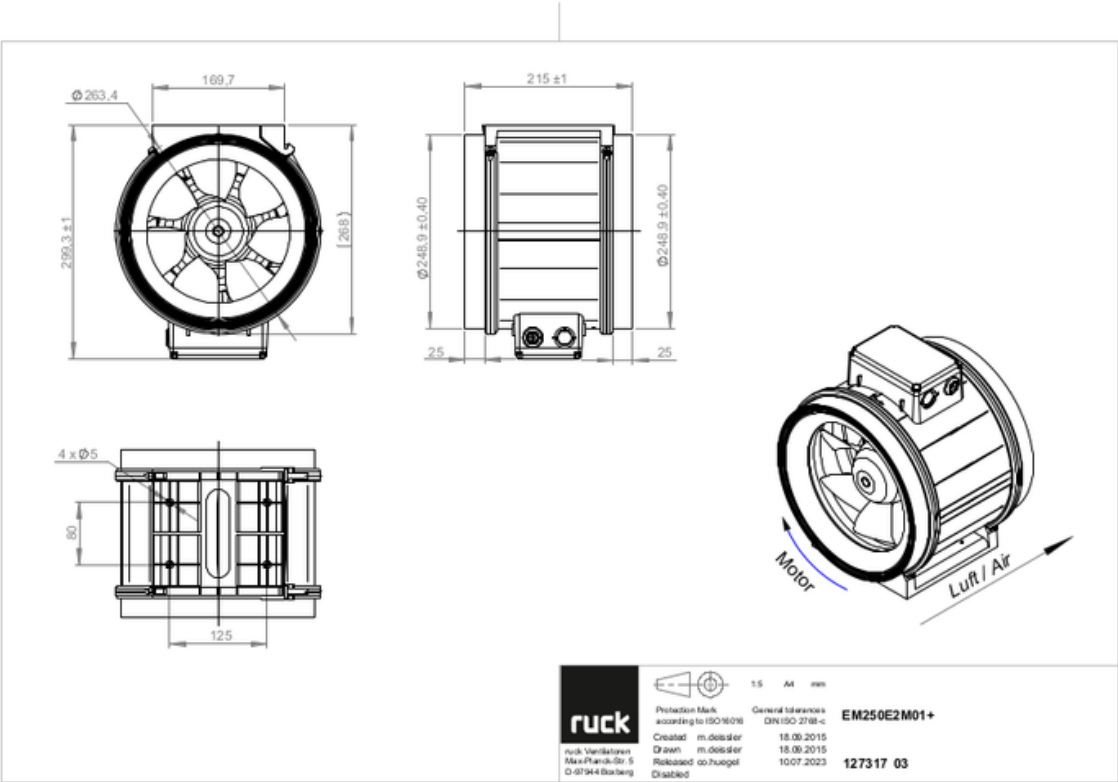

to the product detail page

EM 250 E2M 01

127317

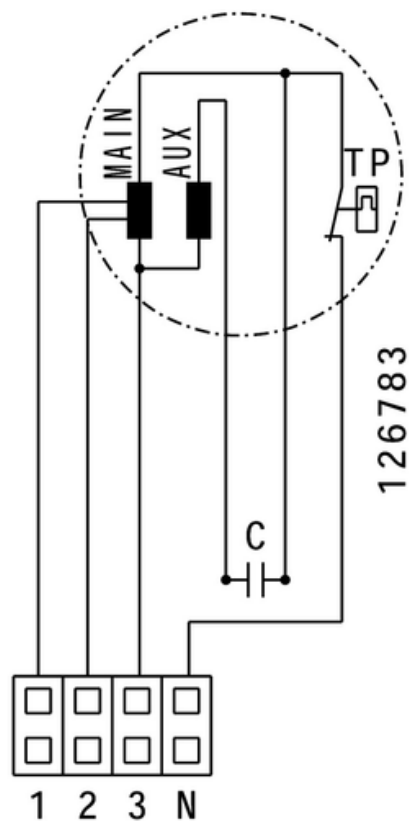

to the product detail page