

EM 400 EC 01


133668

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing made of impact-resistant, reinforced polypropylene
- High efficiency IE5 EC motor, steplessly controllable
- Incl. 1x potentiometer for connection in terminal box
- Conveyed medium temperature up to 40 °C in continuous operation
- The benchmark for efficiency since 2012



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

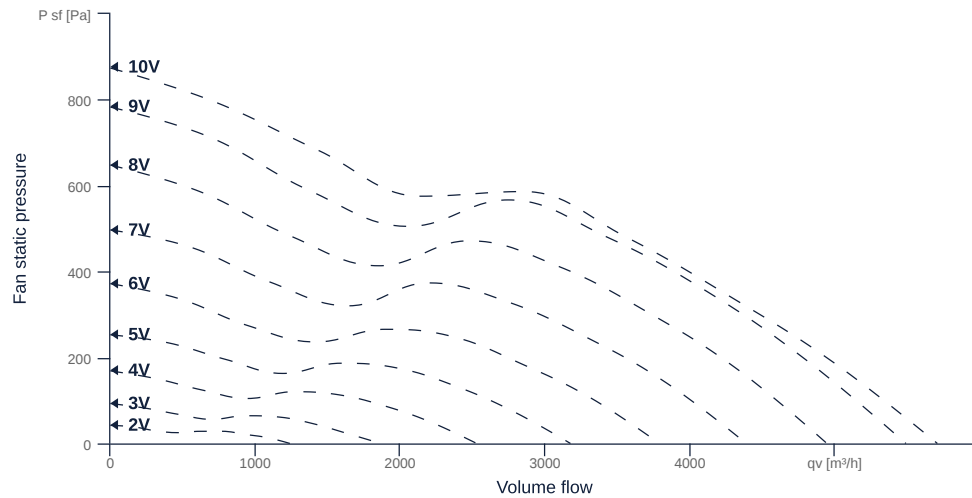

to the product detail page

EM 400 EC 01

133668

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN400		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	11.6	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	729	729	W	P _{ed, max}
Max. operating current (device)	3.35	3.35	A	I _{ed, max}
Max. speed	2620	2620	1/min	n _{max}
Max. stat. efficiency	61.5	61.5	%	η _{es}
Max. fan efficiency	65.3	65.3	%	η _e
Max. flowrate	5700	5700	m³/h	Q _{v, max}
Max. stat pressure	870	870	Pa	p _{st, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}



to the product detail page

EM 400 EC 01

133668

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP20		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	V	U _{rated, f1}
Rated current	3.3	3.3	A	I _{rated, f1}
Shaft power	600	600	W	P _{out, f1}
Speed	2300	2300	1/min	n _{f1}
UL-Certification motor		UL recognized		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2287	1/min	n _{opt}
Efficiency level	67.4	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.73	kW	P _{e, opt}
Overall efficiency	79.3	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	506	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	3408	m³/h	Q _{v, opt}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

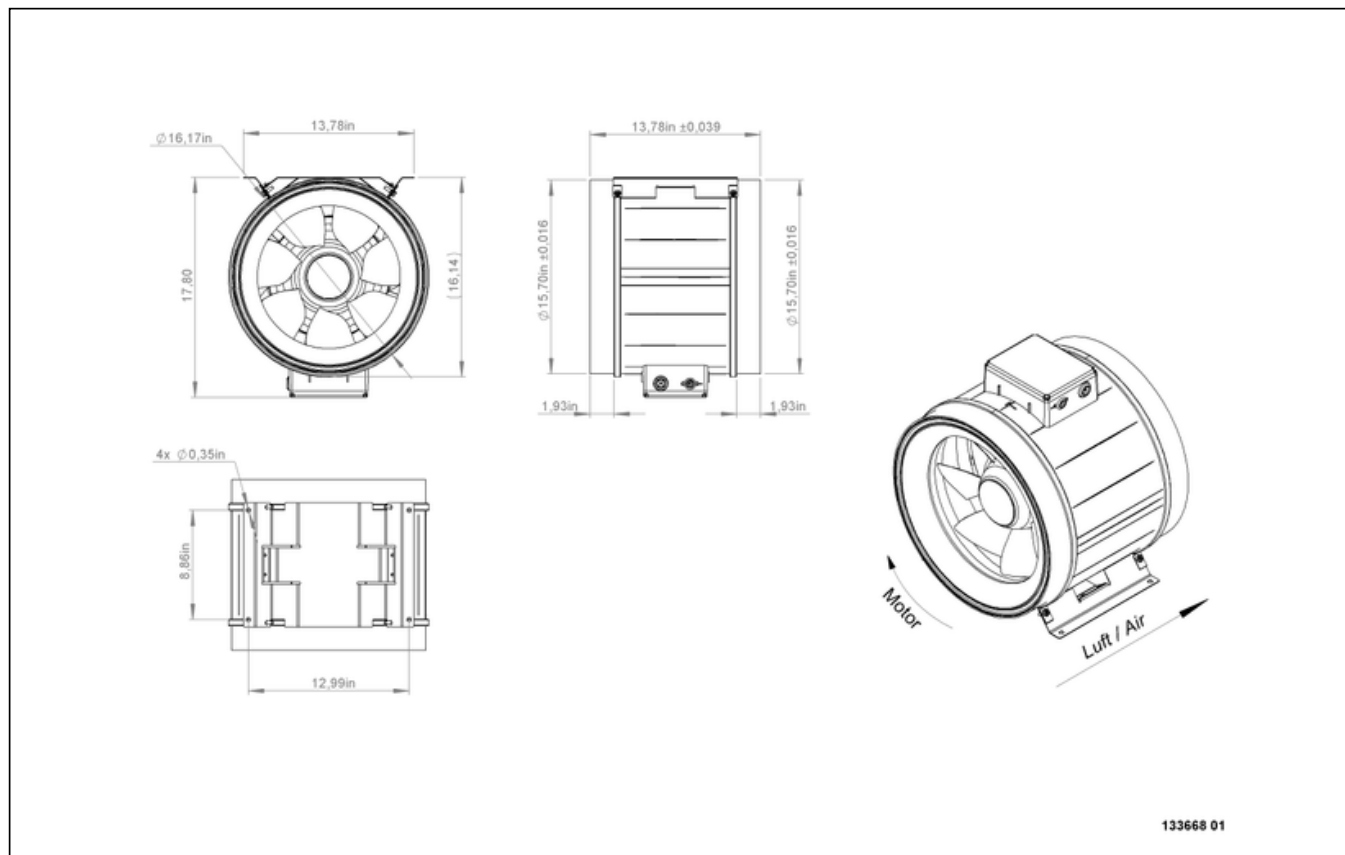

EM 400 EC 01

133668

ruck

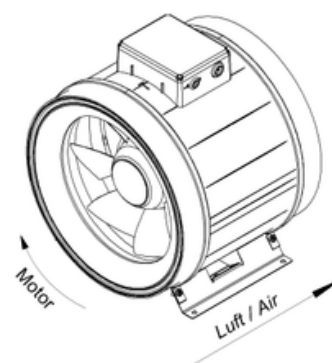

133668 01




to the product detail page

EM 400 EC 01

133668


ruck

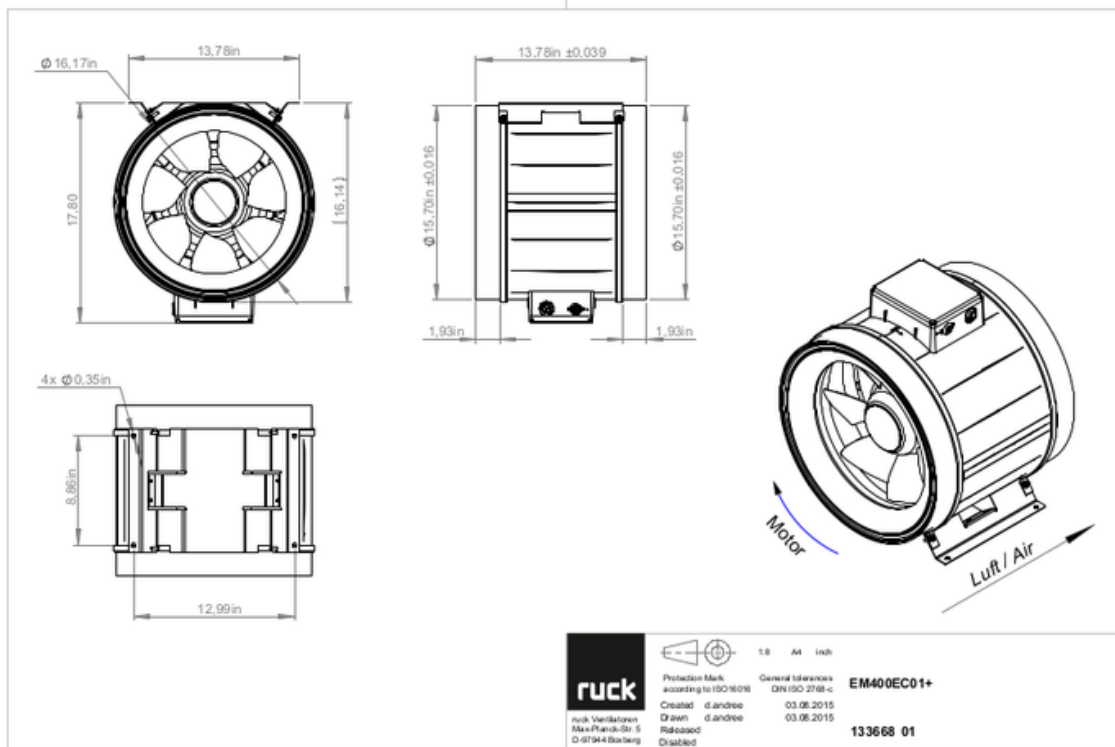

EM 400 EC 01

133668


ruck

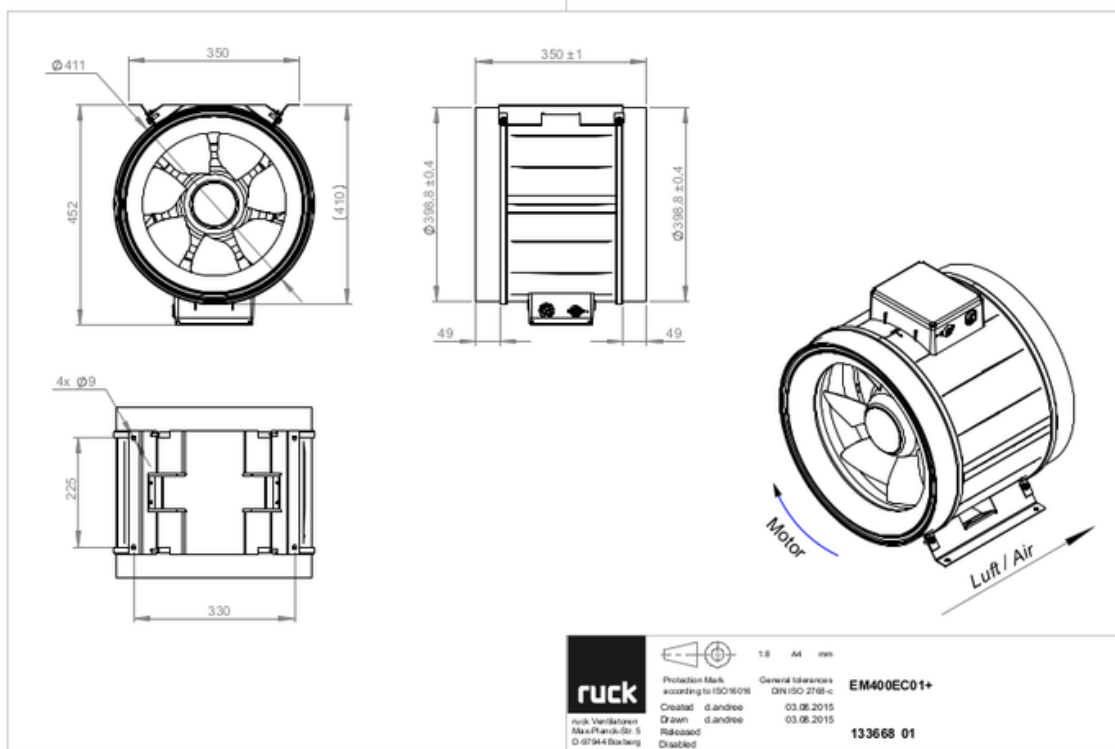

EM 400 EC 01

133668


ruck

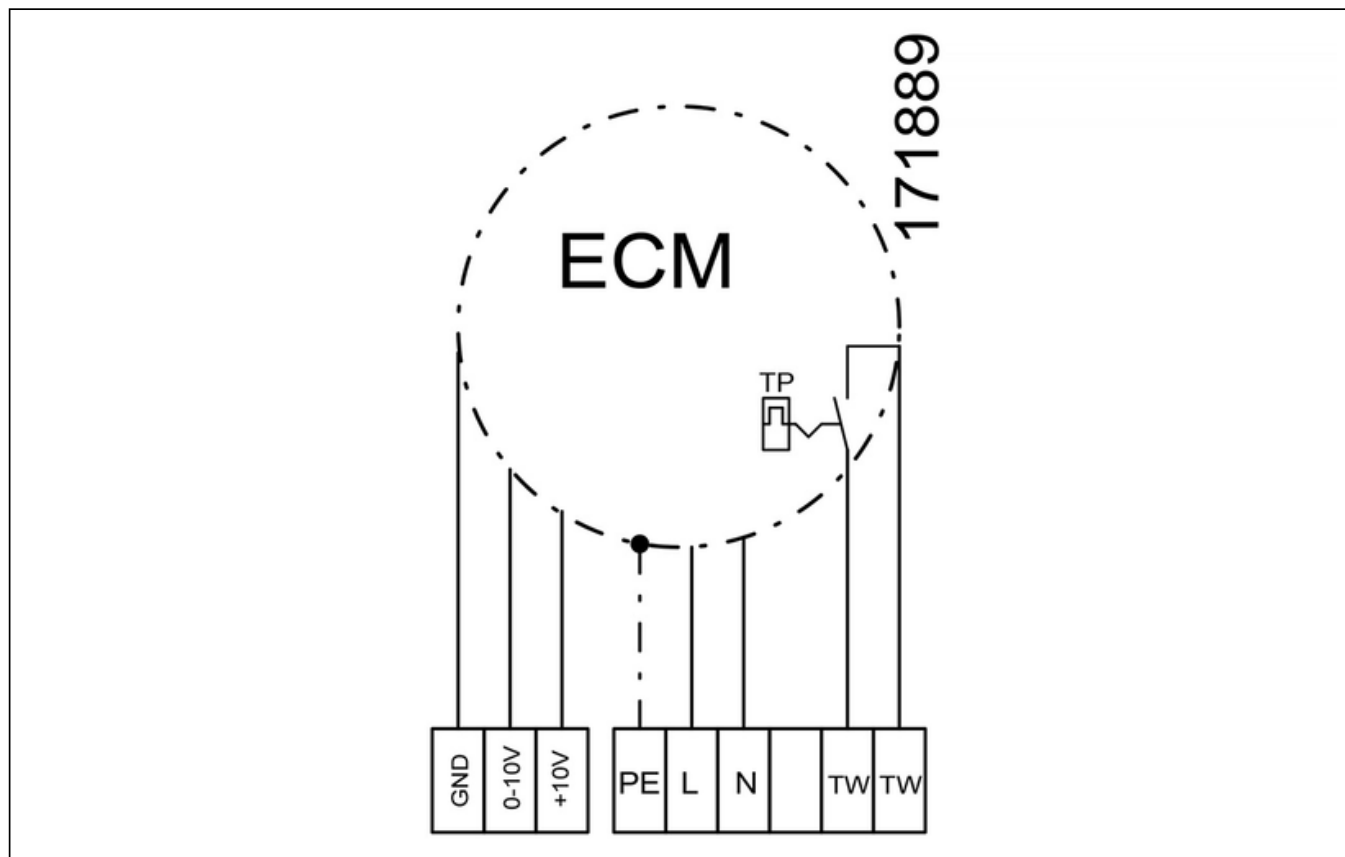

to the product detail page


MECHANICAL ACCESSORIES

FV 400 | 112836



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 400 | 112848



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 400 | 112857



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 400 | 102691



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 400D | 113490




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 400 | 102654



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 400 01 | 169707



- Protection grille for tube connection
- Galvanized wire

SDS 400 | 169612



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 400 | 169647



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 7,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC}$ - $2,5\text{A}/12\text{V DC}$
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50 \text{ }^\circ\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC}$ + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 168752



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\%$ / $50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC}$ / $2-20 \text{ mA}$ / $10-100\% \text{ PWM}$
- Min. and max. output value adjustable

