


EMI 150 E2M O 01


158059

- High-efficiency, insulated diagonal fan
- Optimum sound attenuation due to silencer
- Very compact housing made of galvanized sheet steel
- Robust AC motor, 3-steps controllable
- Highest aerodynamic efficiency
- Conveyed medium temperature up to 60 °C in continuous operation

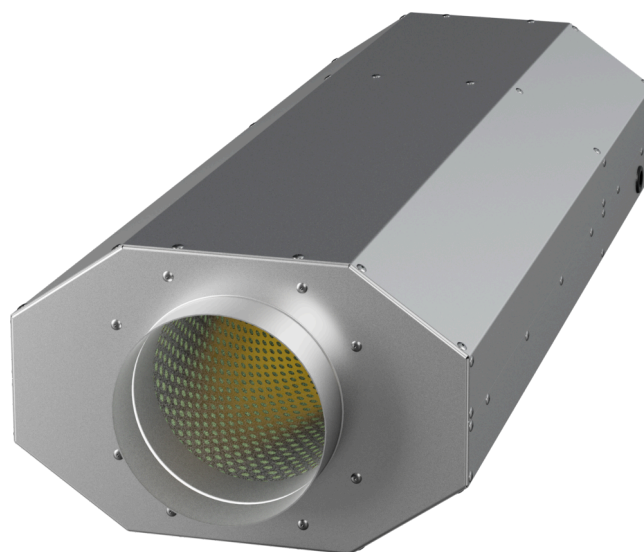

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

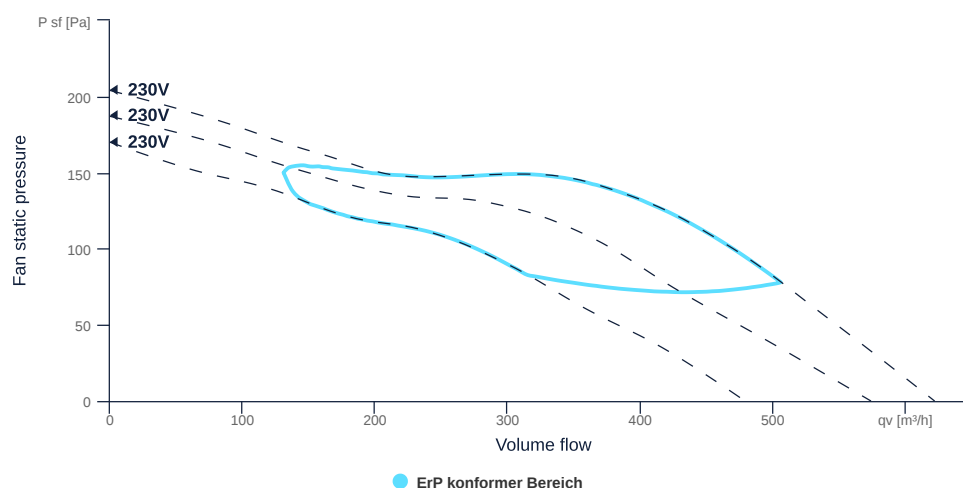

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN150		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	10.2	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	47	w	P _{ed, max}
Max. operating current (device)	0.22	A	I _{ed, max}
Max. speed	2840	rpm	n _{max}
Max. stat. efficiency	30.8	p	η _{es}
Max. fan efficiency	35.8	p	η _e
Max. flowrate	620	CmH	q _{v, max}
Max. stat pressure	200	Pa	p _{sf, max}
Max. medium temperature	60	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}

[to the product detail page](#)

EMI 150 E2M O 01

158059

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		step-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		1.5	μF	Ccond
Voltage capacitor		450	v	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		v	Urated, f1
Rated current	0.22		A	Irated, f1
Nominal power	25		w	Pa
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2748	rpm	n _{opt}
Efficiency level	42.6	p	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	0.05	kw	P _{e, opt}
Overall efficiency	67.3	p	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	148	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	388	CmH	Q _{v, opt}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

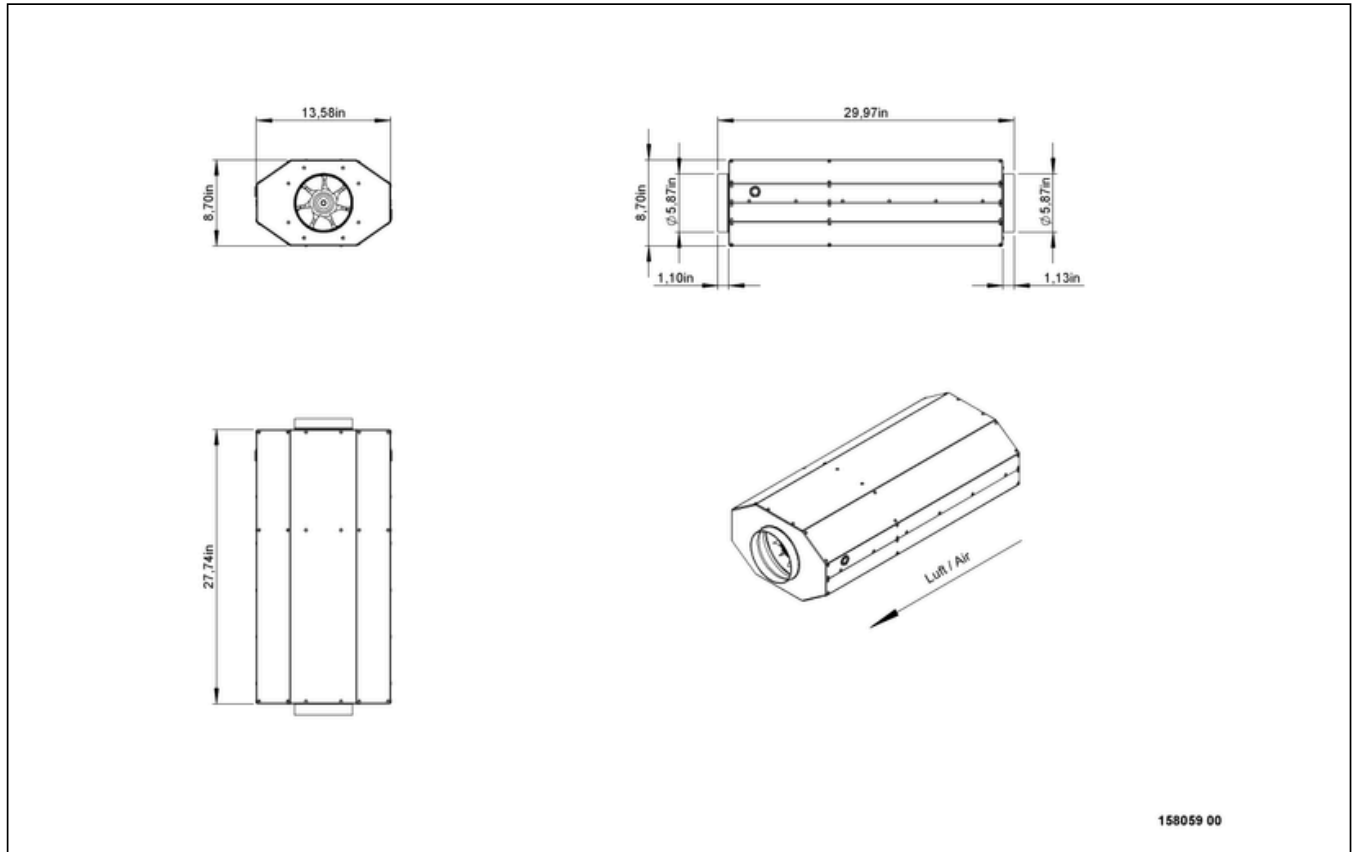





EMI 150 E2M O 01

158059

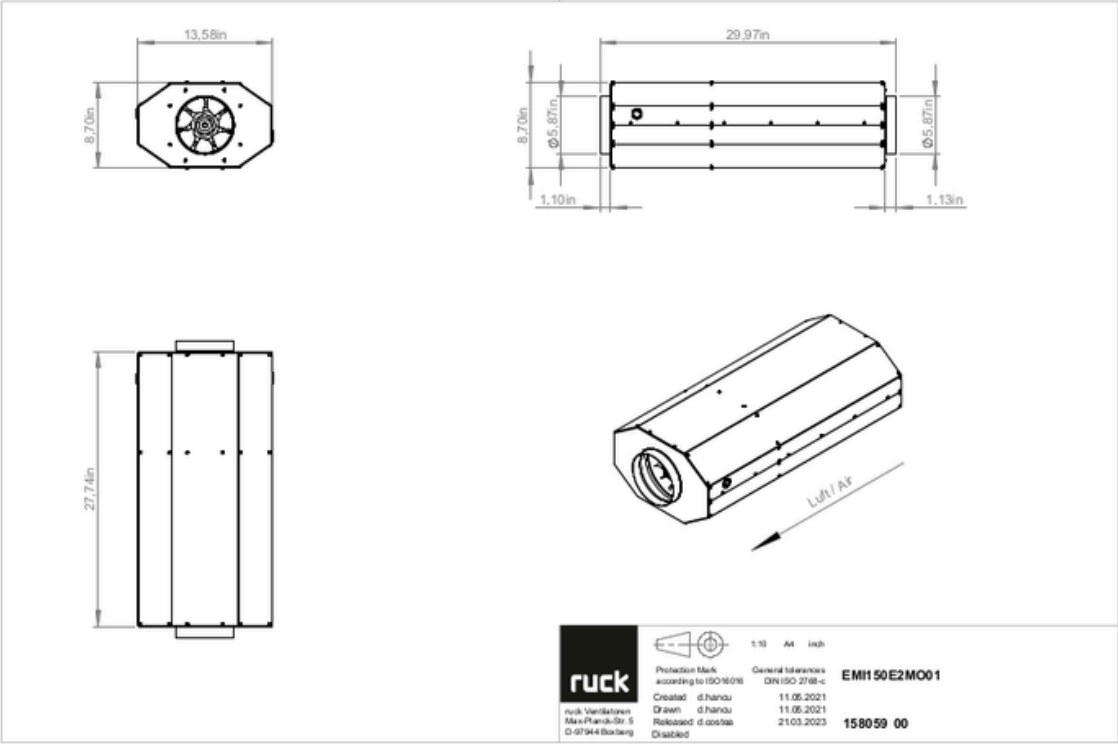

EMI 150 E2M O 01

158059

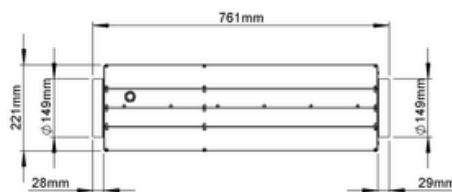


158059 00



to the product detail page

EMI 150 E2M O 01


158059

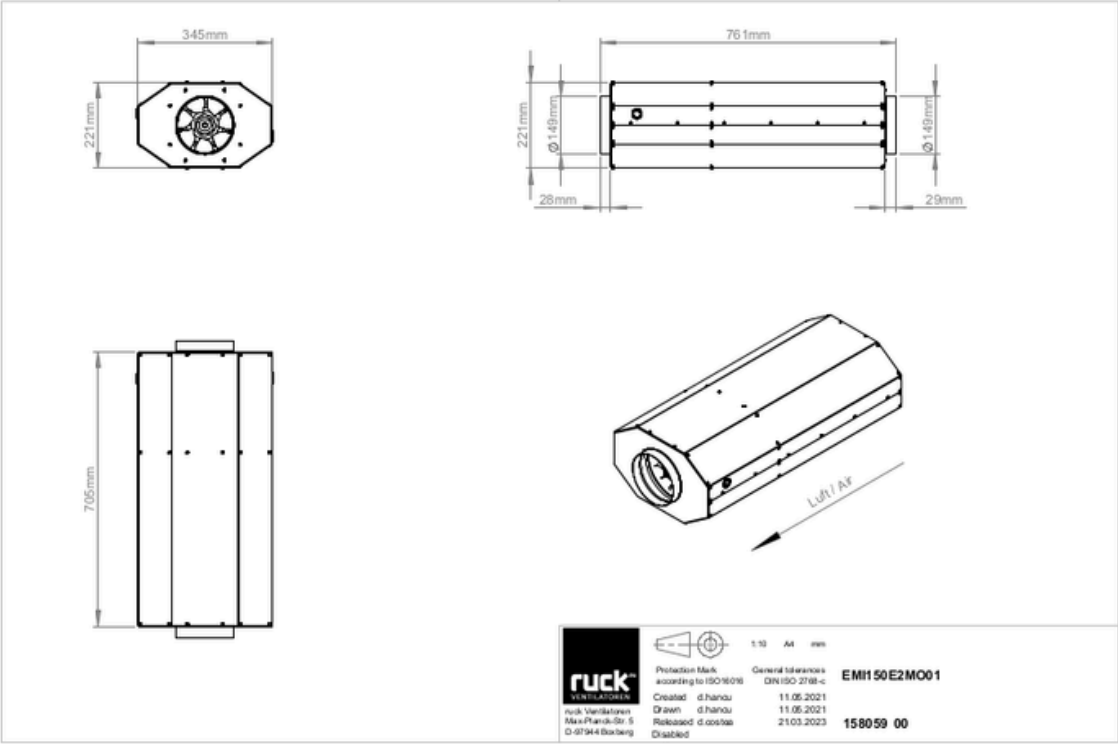

to the product detail page

EMI 150 E2M O 01

158059

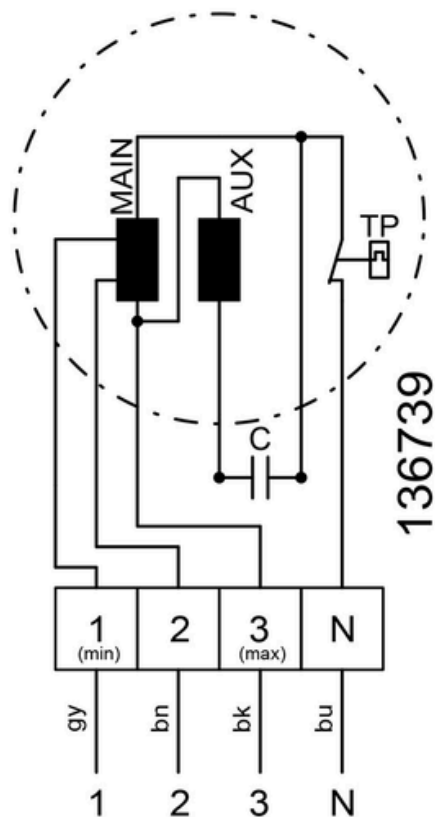

to the product detail page