


EMI 280 EC O 01


158278

- High-efficiency, insulated diagonal fan
- Optimum sound attenuation due to silencer
- Very compact housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Highest aerodynamic efficiency
- Conveyed medium temperature up to 45 °C in continuous operation

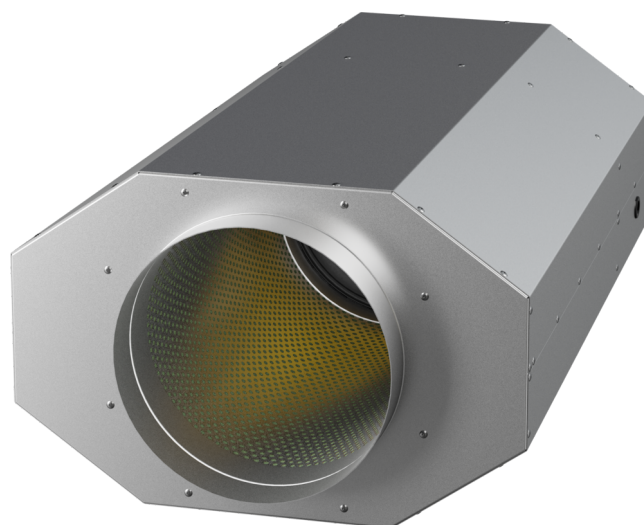

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

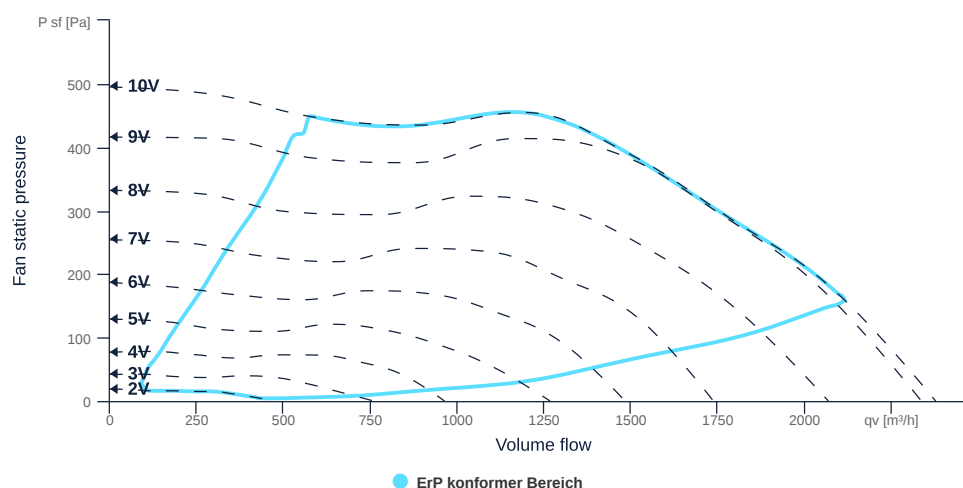

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN280		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	17.1	kg	m
Fan type	Diagonal		F _{antype}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	275	275	w	P _{ed, max}
Max. operating current (device)	1.91	1.91	A	I _{ed, max}
Max. speed	3230	3230	rpm	n _{max}
Max. stat. efficiency	56	56	p	η _{es}
Max. fan efficiency	59.5	59.5	p	η _e
Max. flowrate	2380	2380	CmH	q _{v, max}
Max. stat pressure	495	495	Pa	p _{sf, max}
Max. medium temperature	45	45	°C	T _{m, max}
Max. environment temperature	45	45	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}



to the product detail page

EMI 280 EC O 01

158278

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP33		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	v	U _{rated, f1}
Rated current	1.72	1.72	A	I _{rated, f1}
Nominal power	267	267	w	P _a
Speed	3047	3047	rpm	n _{f1}
Min. temperature	-30	-30	°C	T _{motor, min}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	3008	rpm	n _{opt}
Efficiency level	69.4	p	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	0.27	kw	P _{e, opt}
Overall efficiency	85.9	p	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	400	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1503	CmH	q _{v, opt}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

EMI 280 EC O 01


158278

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

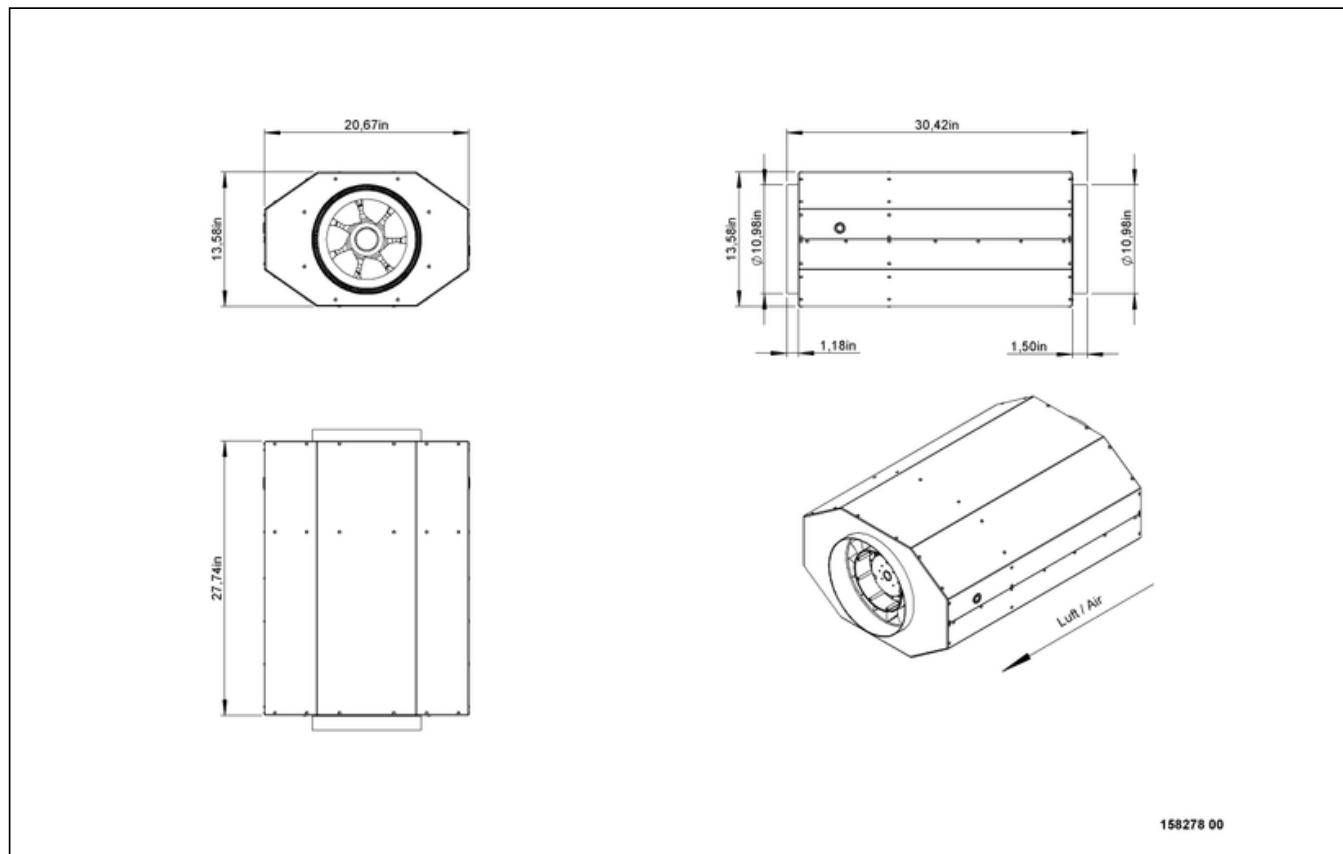

EMI 280 EC O 01

158278




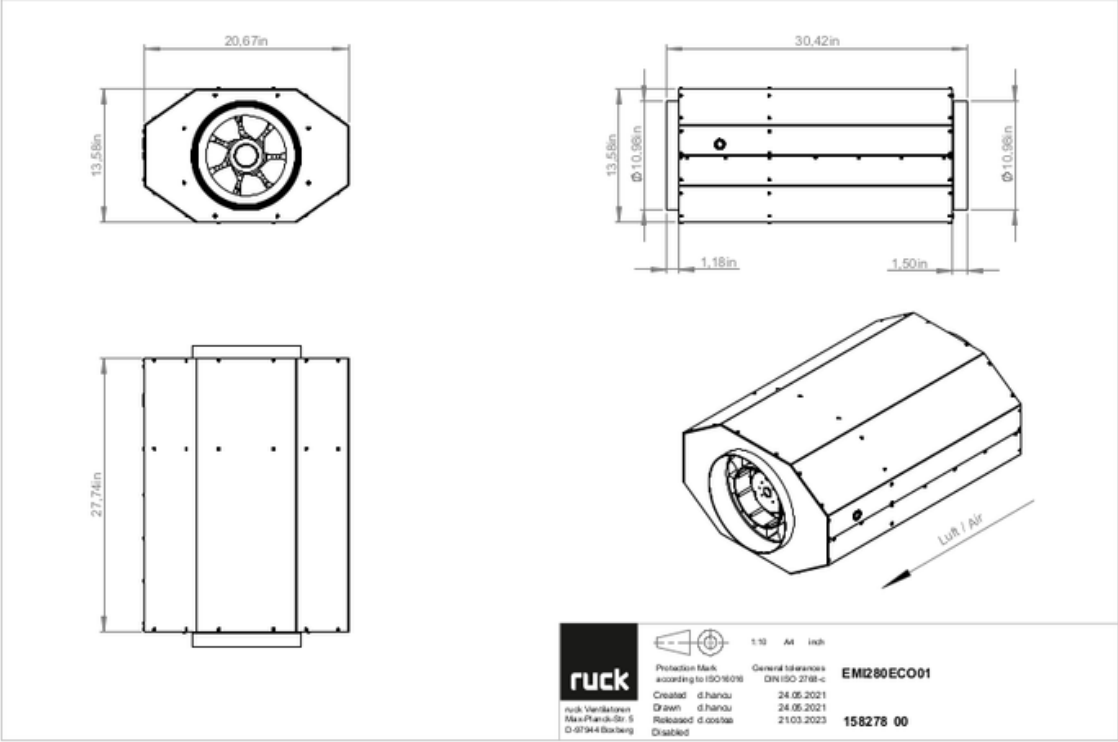


to the product detail page

EMI 280 EC O 01

158278

ruck

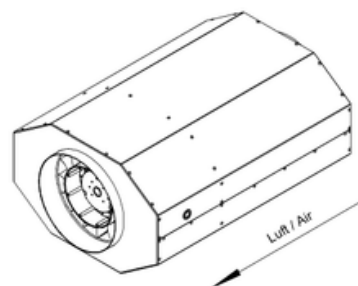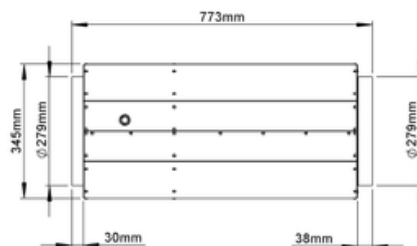


158278 00



EMI 280 EC O 01

158278

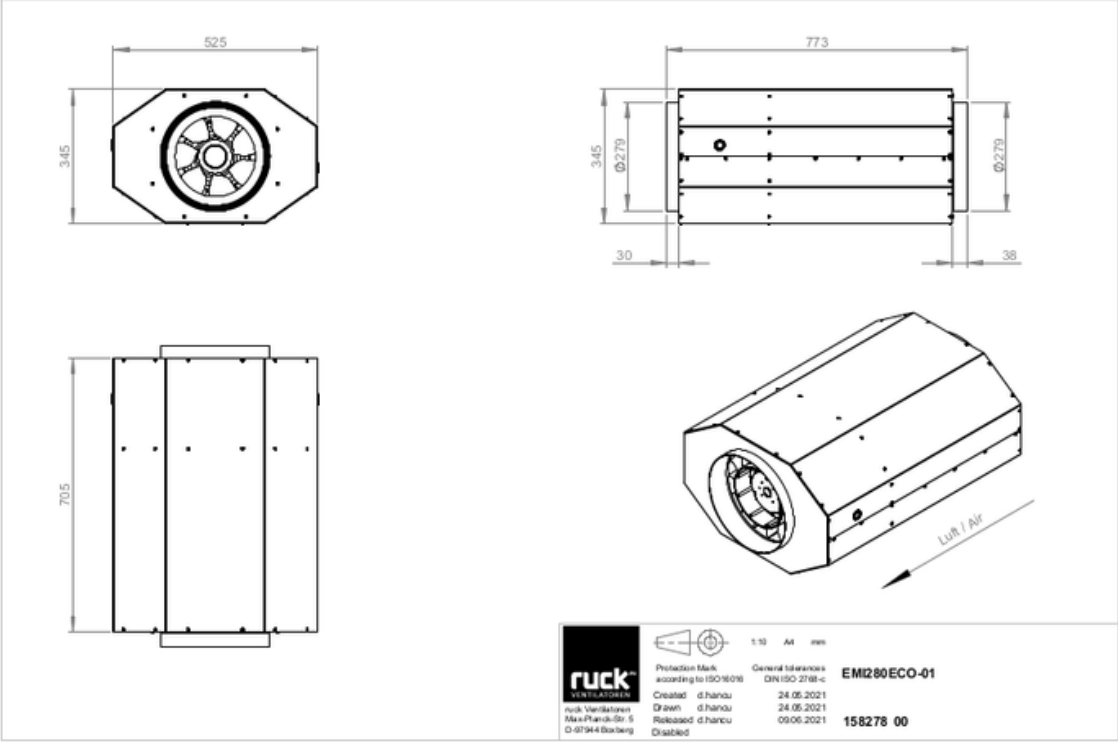

to the product detail page

