


EMI 315 EC O 01


158353

- High-efficiency, insulated diagonal fan
- Optimum sound attenuation due to silencer
- Very compact housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Highest aerodynamic efficiency
- Conveyed medium temperature up to 45 °C in continuous operation

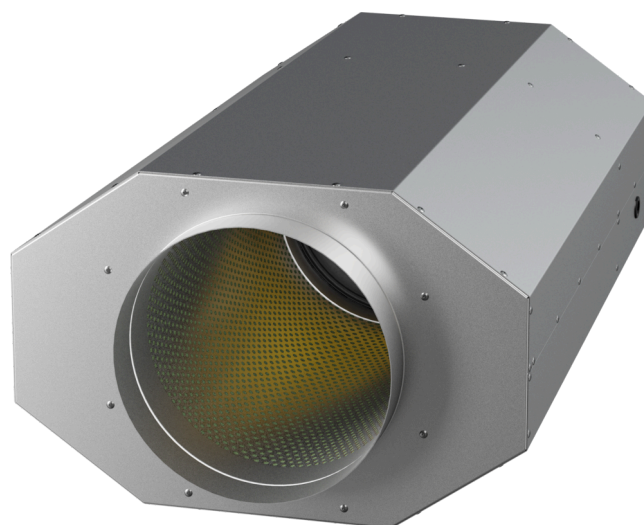

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

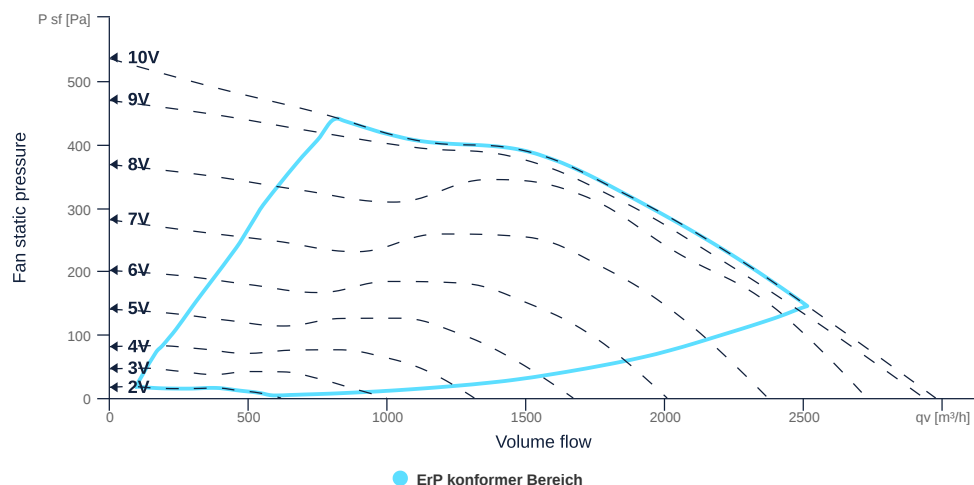

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN315		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	18.3	kg	m
Fan type	Diagonal		F _{antype}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	293	293	w	P _{ed, max}
Max. operating current (device)	2.1	2.1	A	I _{ed, max}
Max. speed	2910	2910	rpm	n _{max}
Max. stat. efficiency	54.3	54.3	p	η _{es}
Max. fan efficiency	57	57	p	η _e
Max. flowrate	2970	2970	CmH	q _{v, max}
Max. stat pressure	535	535	Pa	p _{sf, max}
Max. medium temperature	45	45	°C	T _{m, max}
Max. environment temperature	45	45	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}

[to the product detail page](#)

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP33		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	v	U _{rated, f1}
Rated current	1.83	1.83	A	I _{rated, f1}
Nominal power	280	280	w	P _a
Speed	2500	2500	rpm	n _{f1}
Min. temperature	-30	-30	°C	T _{motor, min}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2466	rpm	n _{opt}
Efficiency level	64.3	p	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	0.28	kw	P _{e, opt}
Overall efficiency	80.9	p	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	341	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1741	CmH	q _{v, opt}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

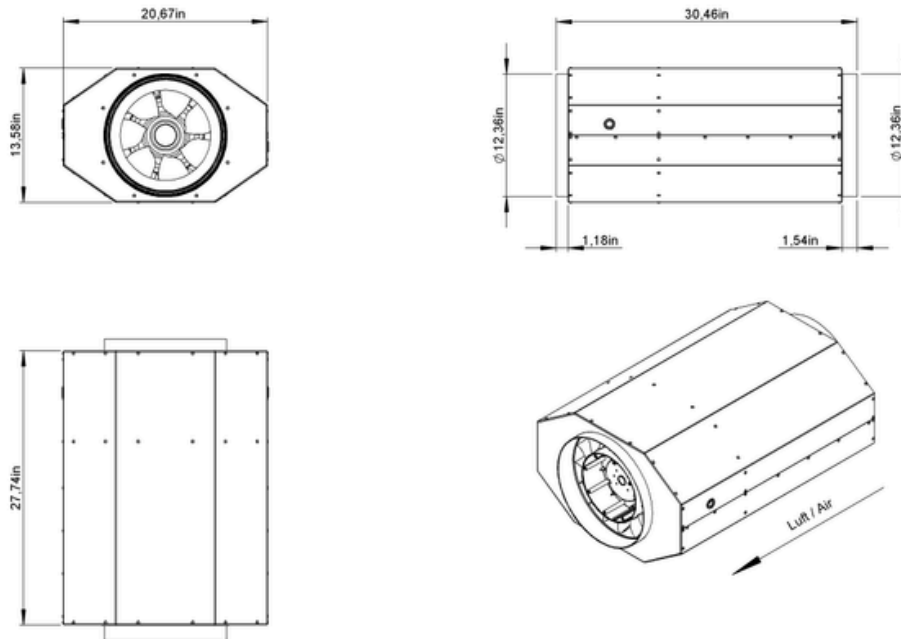


158353 00



EMI 315 EC O 01





158353

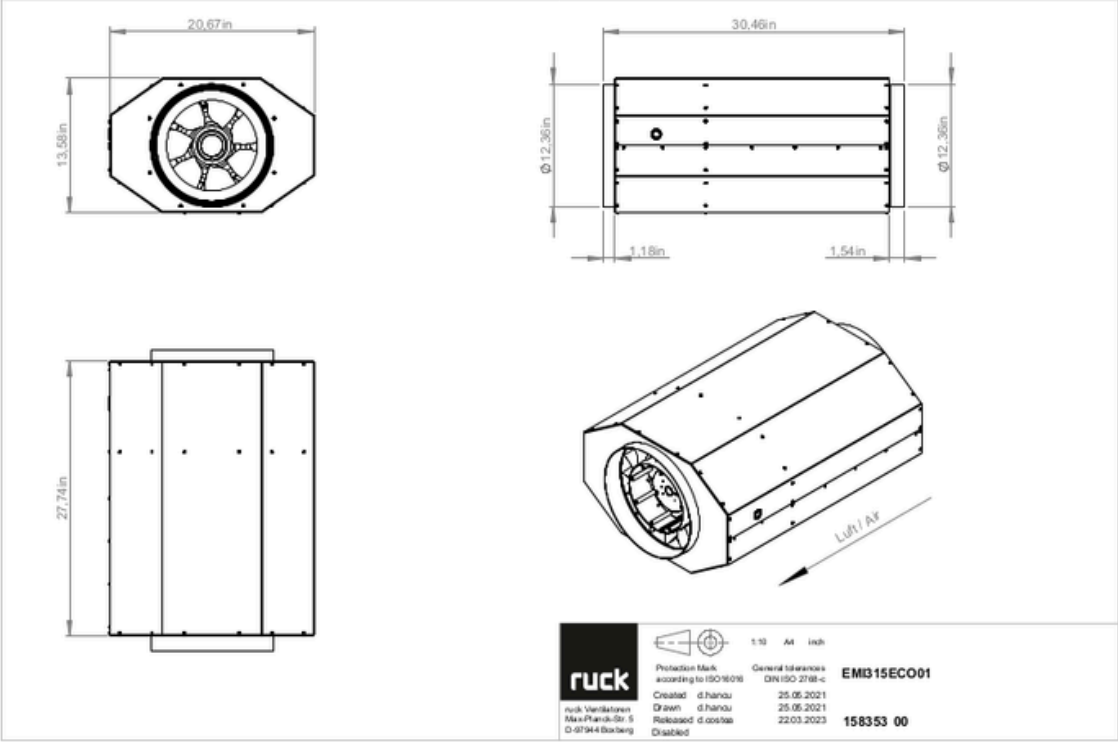

to the product detail page

EMI 315 EC O 01

158353

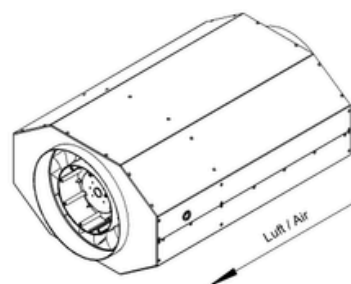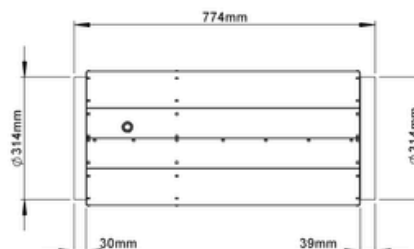


158353 00



to the product detail page

EMI 315 EC O 01

158353

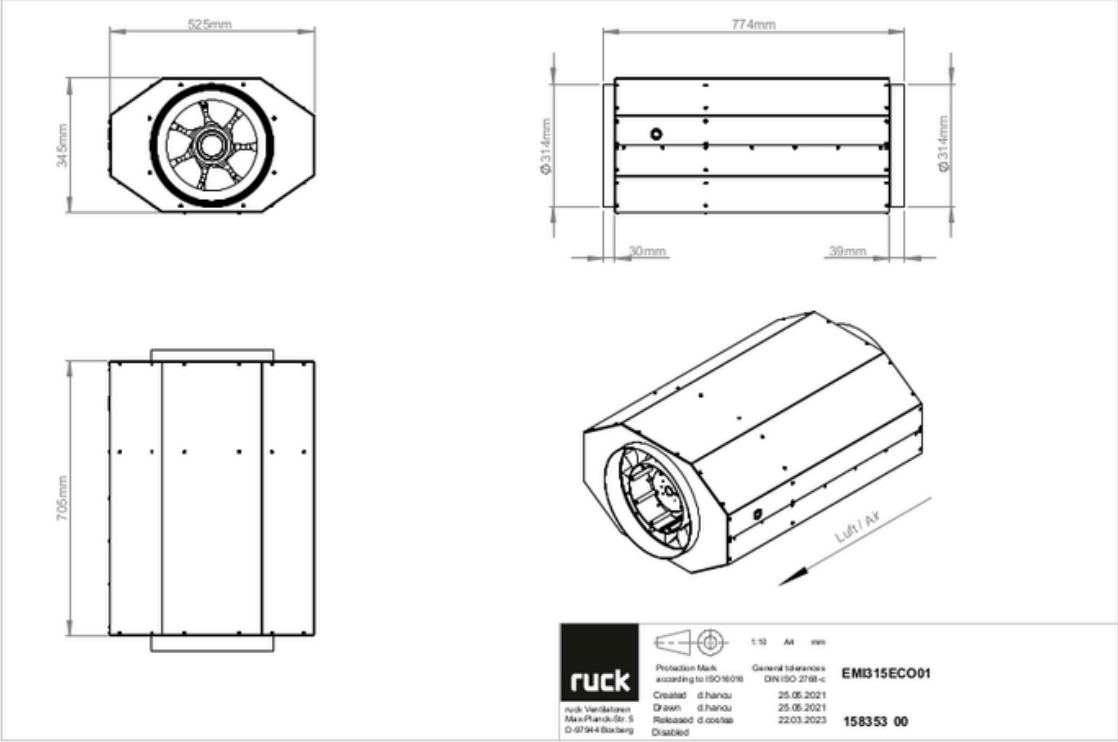

to the product detail page



