


EMI 355 EC O 01


158373

- High-efficiency, insulated diagonal fan
- Optimum sound attenuation due to silencer
- Very compact housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Highest aerodynamic efficiency
- Conveyed medium temperature up to 35 °C in continuous operation

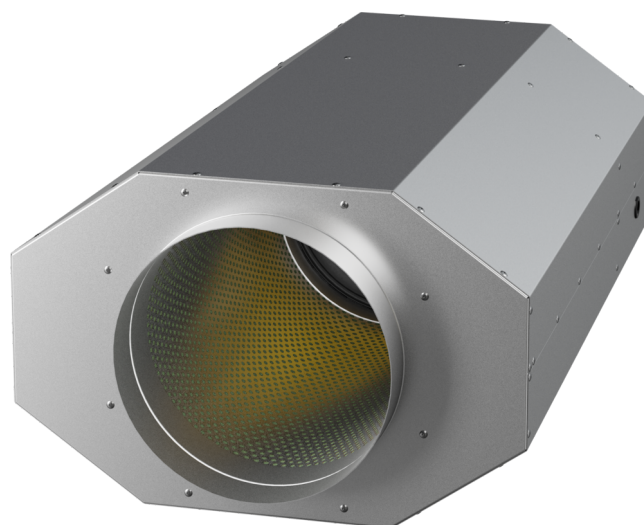

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

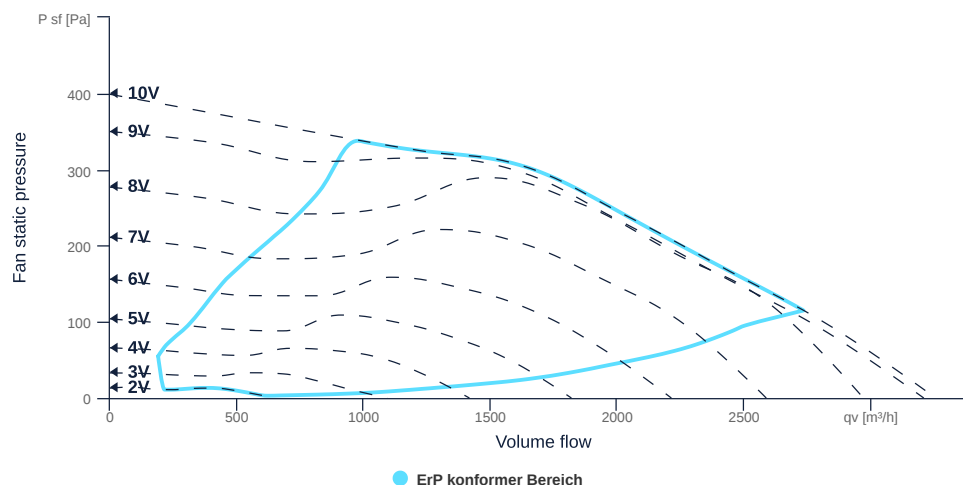

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	21.4	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	270	270	w	P _{ed, max}
Max. operating current (device)	1.91	1.91	A	I _{ed, max}
Max. speed	2250	2250	rpm	n _{max}
Max. stat. efficiency	51.4	51.4	p	η _{es}
Max. fan efficiency	54.6	54.6	p	η _e
Max. flowrate	3255	3255	CmH	q _{v, max}
Max. stat pressure	400	400	Pa	p _{sf, max}
Max. medium temperature	35	35	°C	T _{m, max}
Max. environment temperature	35	35	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}


[to the product detail page](#)

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP30		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	v	U _{rated, f1}
Rated current	1.61	1.61	A	I _{rated, f1}
Nominal power	253	253	w	P _a
Speed	1946	1946	rpm	n _{f1}
Min. temperature	-30	-30	°C	T _{motor, min}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)





Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	1851	rpm	n _{opt}
Efficiency level	64.8	p	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	0.25	kw	P _{e, opt}
Overall efficiency	81.7	p	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	271	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1923	CmH	q _{v, opt}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass


[to the product detail page](#)

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

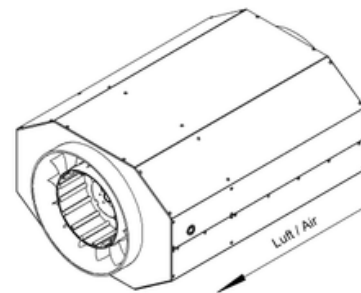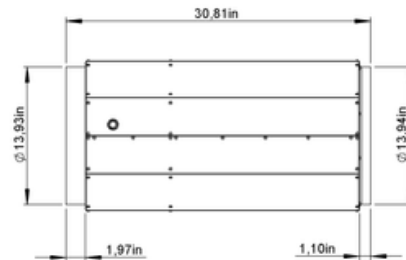


158373 00



EMI 355 EC O 01

158373




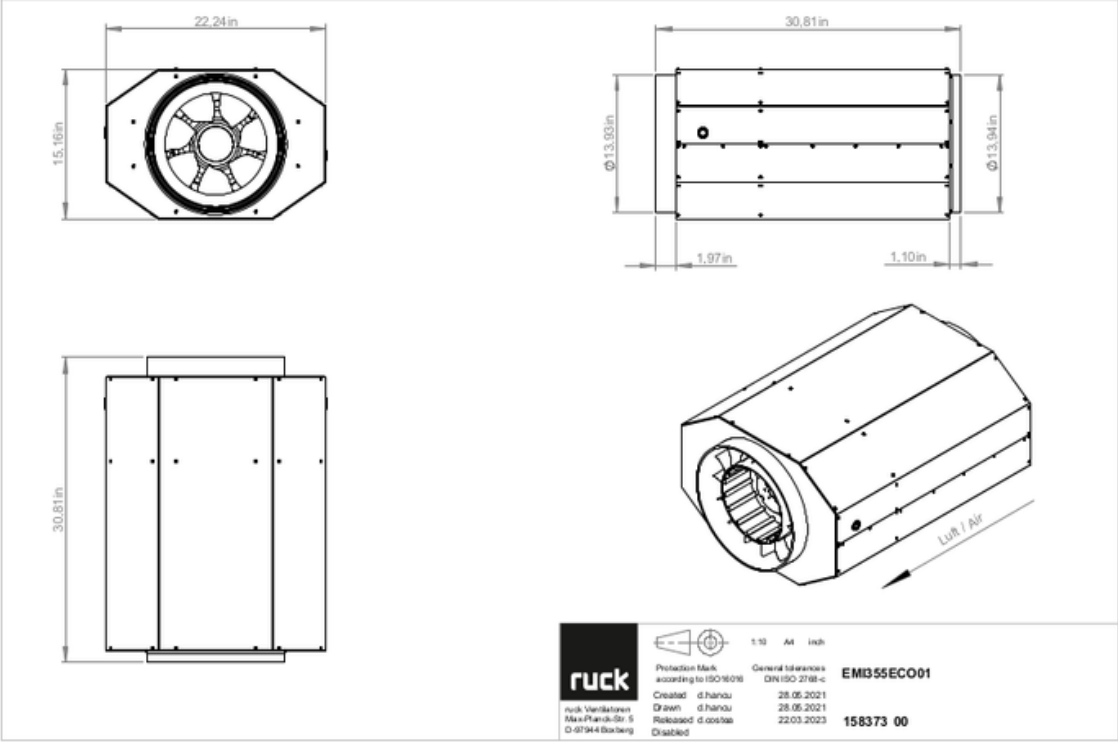


[to the product detail page](#)



EMI 355 EC O 01

158373

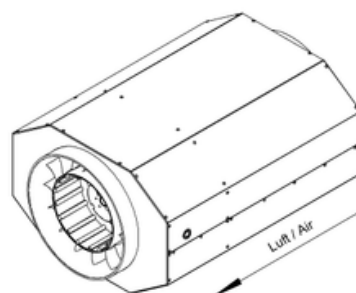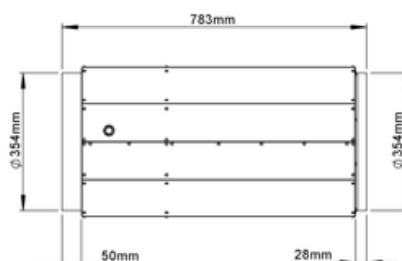


158373 00



to the product detail page

EMI 355 EC O 01

158373

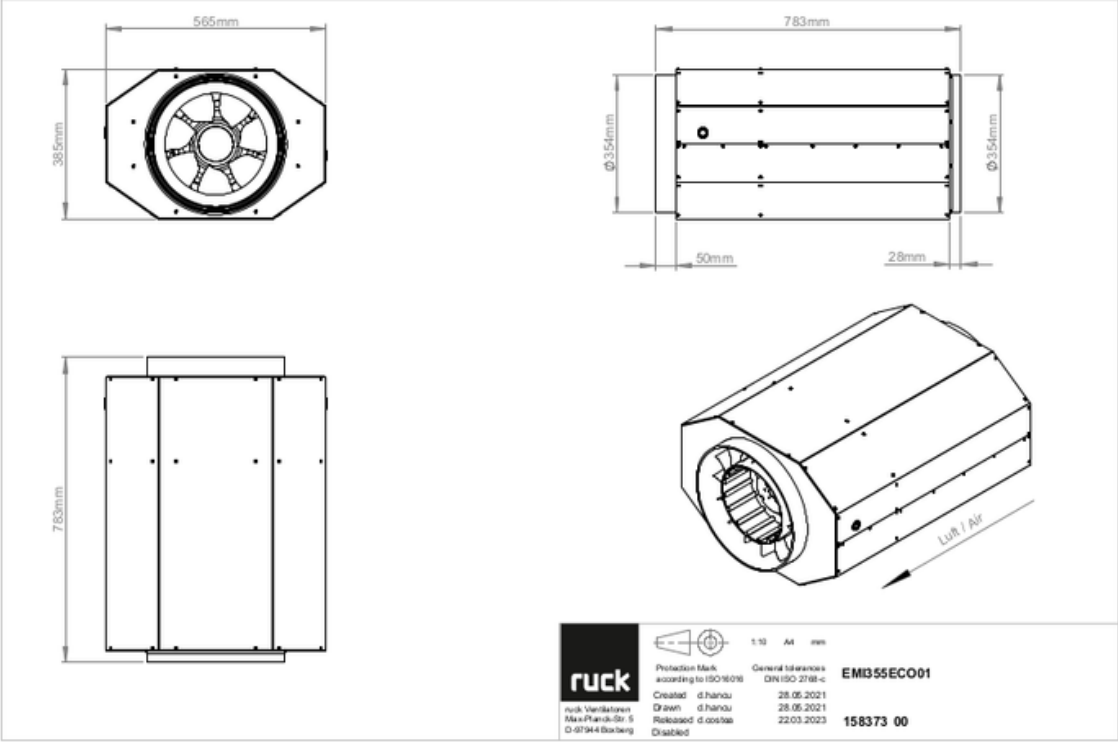

to the product detail page



