

EL 450 EC K 01


159395

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- High efficiency EC motor, steplessly controllable
- Conveyor temperature up to 60 °C in continuous operation
- Aluminum AlMg3 housing



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

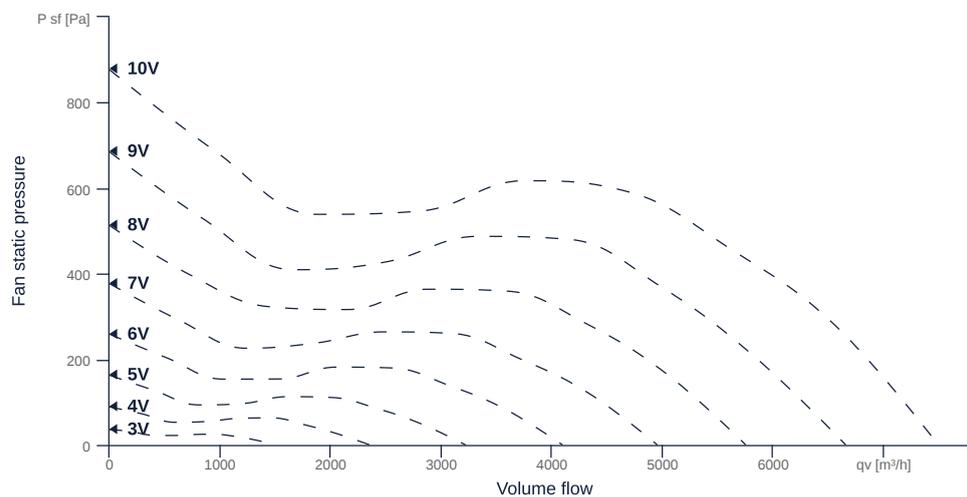

to the product detail page

EL 450 EC K 01

159395

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN450		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	10 A		fuse
Housing material	Aluminium		matcasing
Impeller material	Aluminium		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP55		IPebox
Weight	18.2	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1144	1144	w	P _{ed, max}
Max. operating current (device)	8.2	8.2	A	I _{ed, max}
Max. speed	2100	2100	rpm	n _{max}
Max. stat. efficiency	64.5	64.5	p	η _{es}
Max. fan efficiency	69.2	69.2	p	η _e
Max. flowrate	7490	7490	CmH	q _{v, max}
Max. stat pressure	880	880	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-20	-20	°C	T _{amb, min}



to the product detail page

EL 450 EC K 01

159395

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrSUPmotor
Rated voltage	220		v	U _{rated, f1}
Rated voltage (wiring 2)	277		v	U _{rated, f2}
Rated current	8.7		A	I _{rated, f1}
Rated current (wiring 2)	6.9		A	I _{rated, f2}
Nominal power	1100		w	P _a
Nominal power (wiring 2)	1100		w	P _{out, f2}
Speed	3000		rpm	n _{f1}
Speed (wiring 2)	3000		rpm	n _{f2}
Efficiency	87.8		p	η _{m, f1}
Efficiency (wiring 2)	87.8		p	η _{m, f2}
Min. temperature	-20		°C	T _{motor, min}
UL-Certification motor			None	ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2061	rpm	n _{opt}
Efficiency level	74.6	p	N
Efficiency category	total		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	1.11	kw	P _{e, opt}
Overall efficiency	84.7	p	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	566	Pa	pf, opt
Flowrate at energy efficiency optimum	4899	CmH	Q _{v, opt}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

EL 450 EC K 01

159395


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

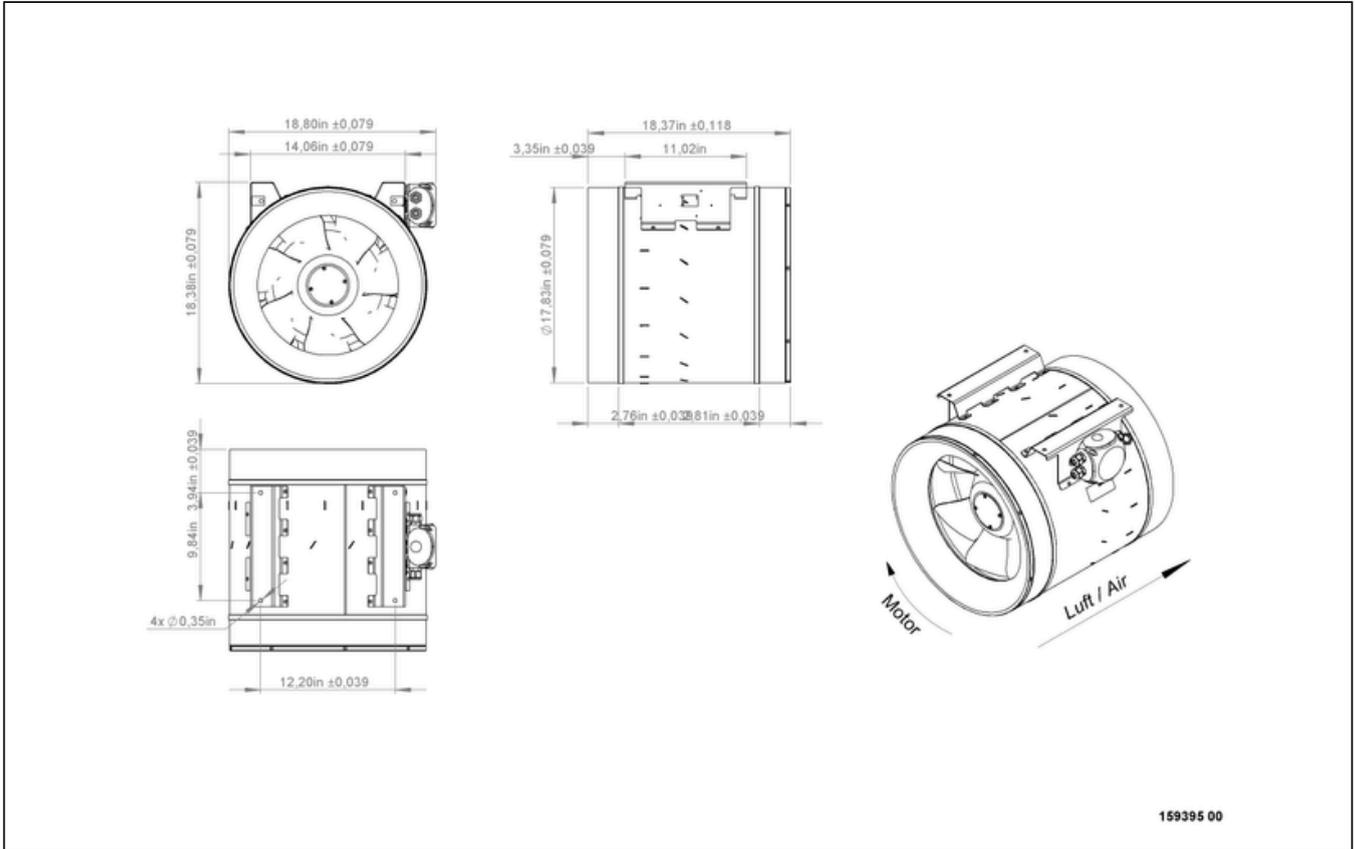

to the product detail page

EL 450 EC K 01


159395

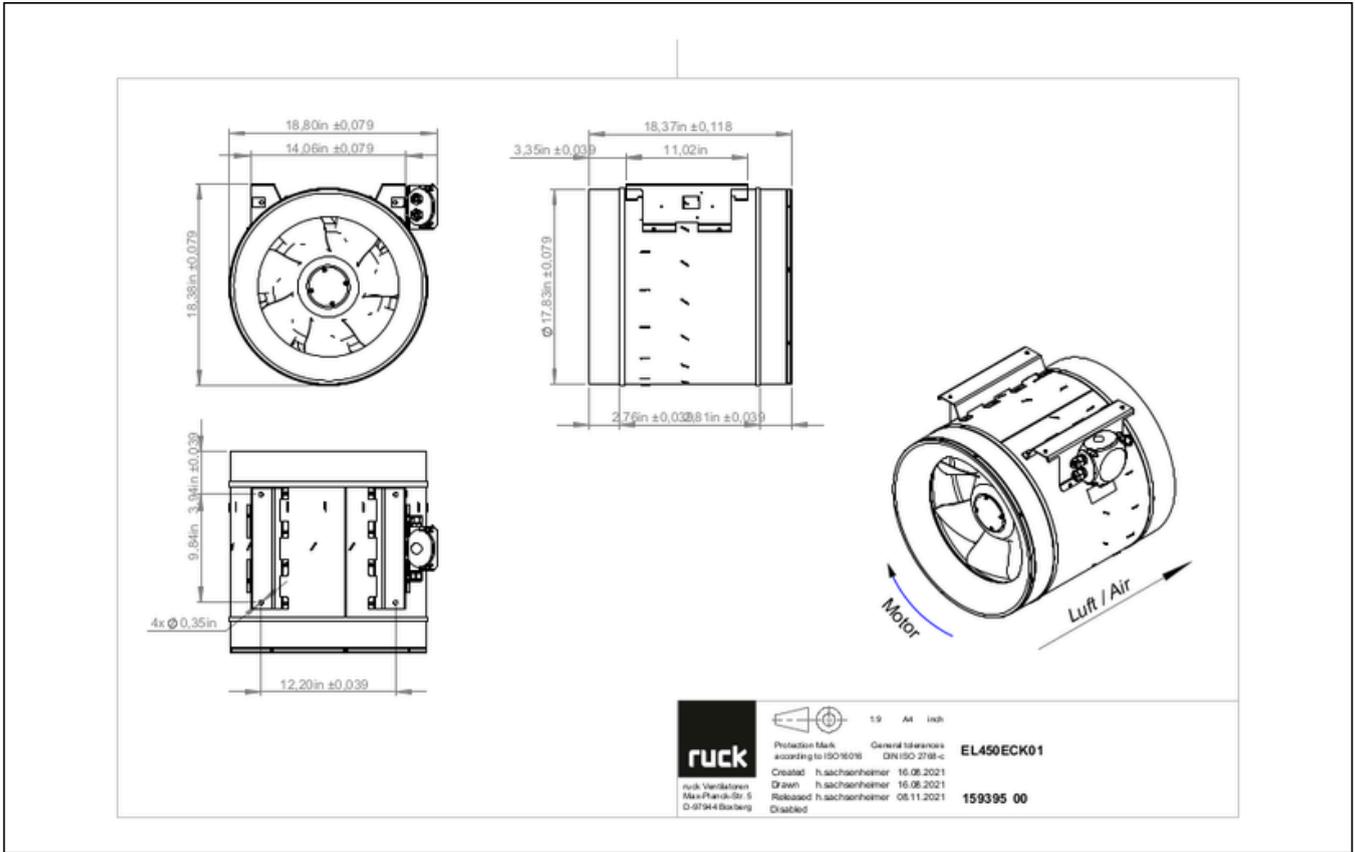

to the product detail page

EL 450 EC K 01


159395

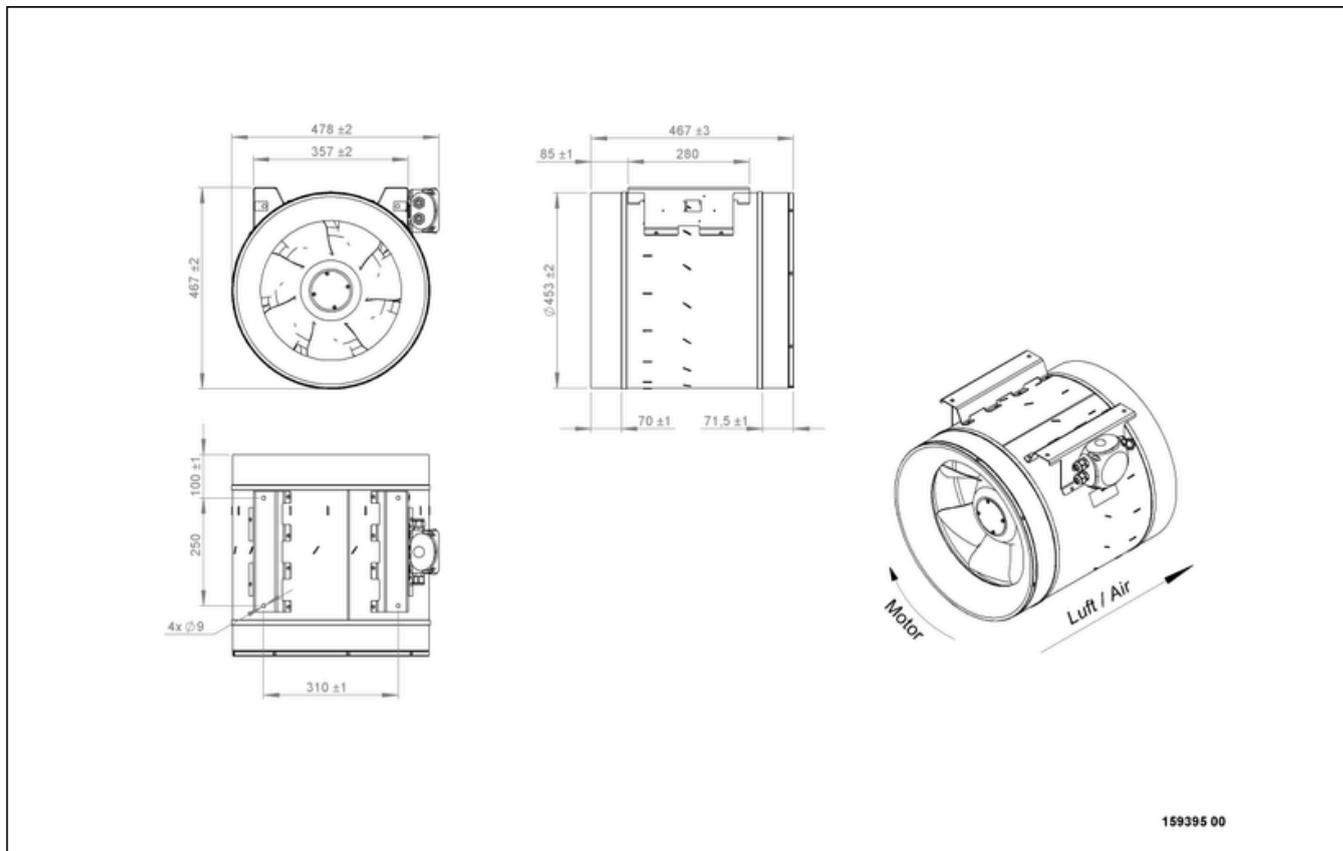

to the product detail page

EL 450 EC K 01


159395

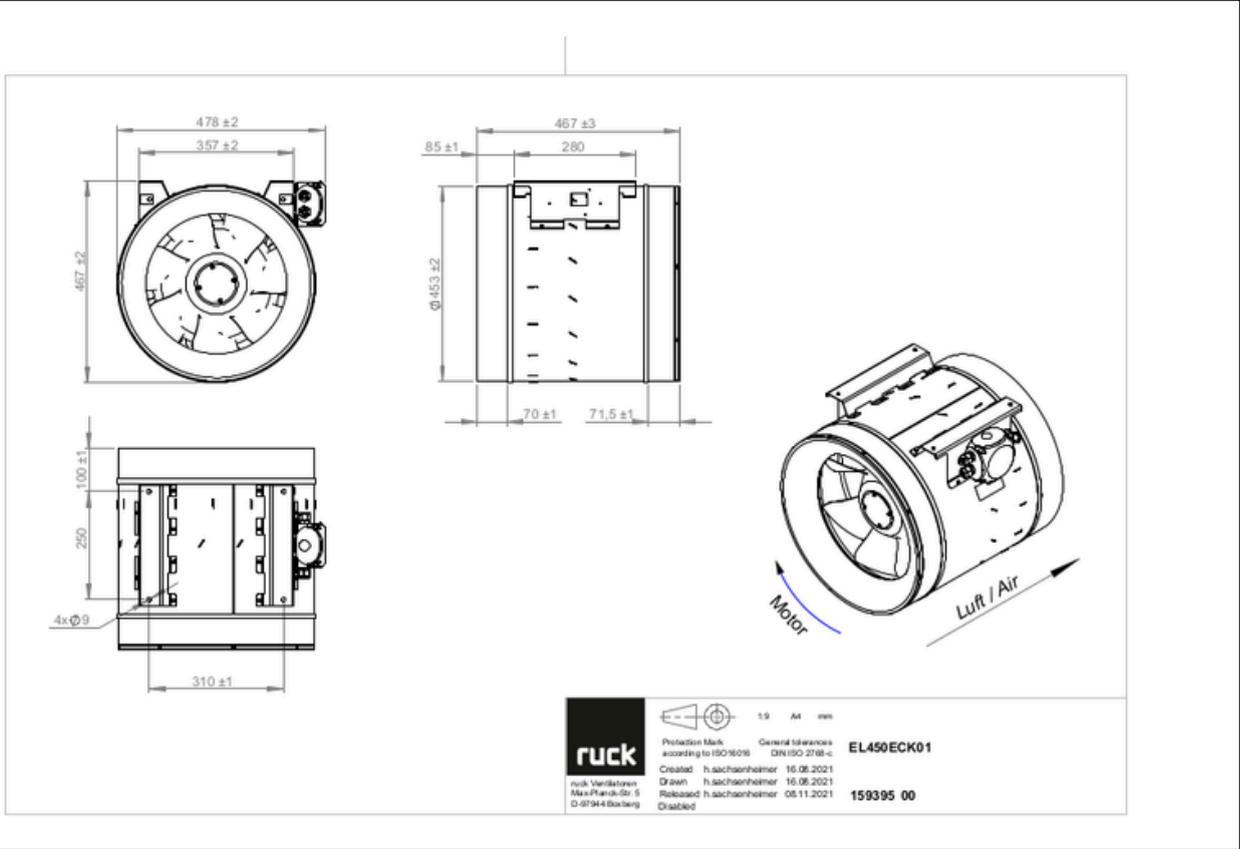

to the product detail page

EL 450 EC K 01

159395

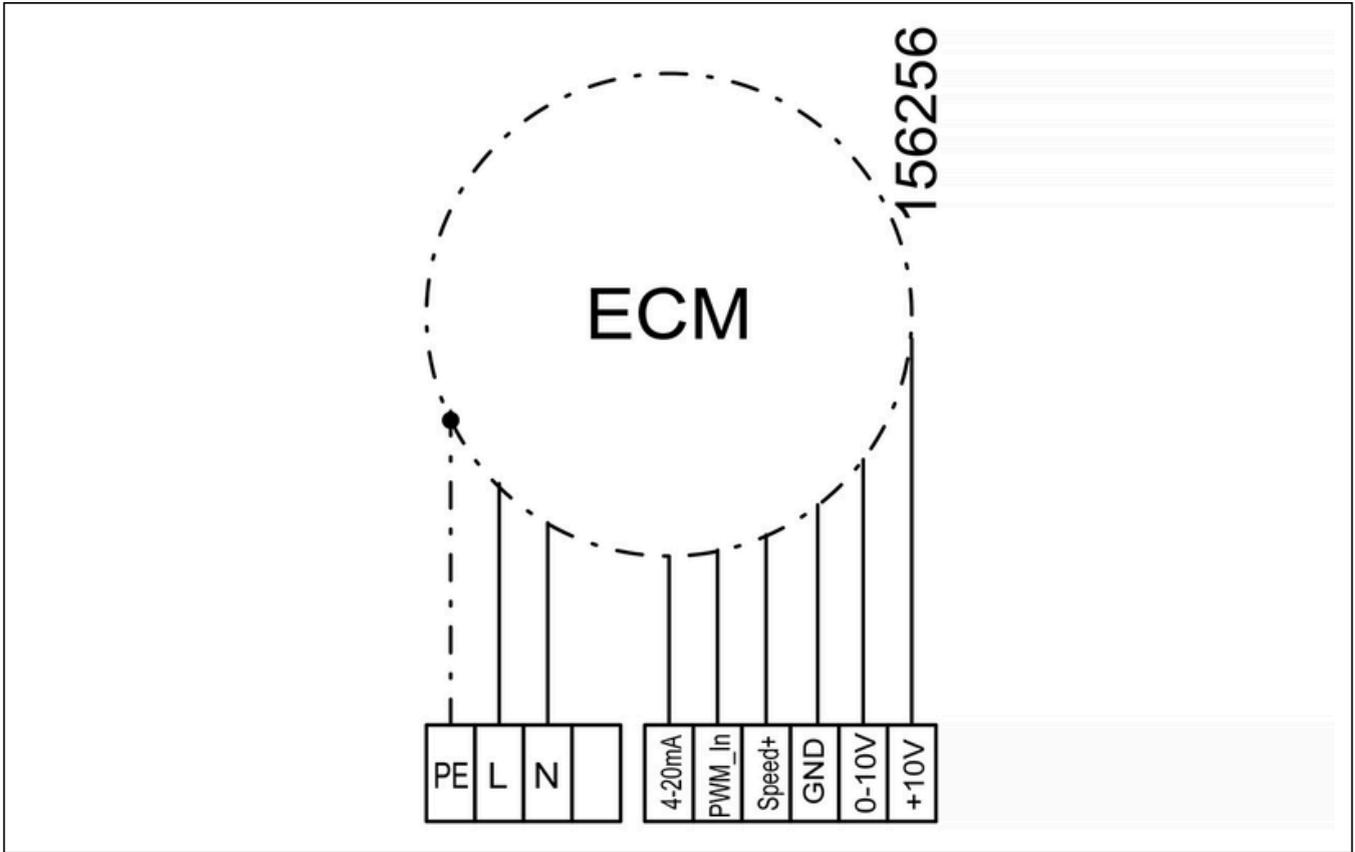


MECHANICAL ACCESSORIES

VM 450 | 119495



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 450 02 | 119411

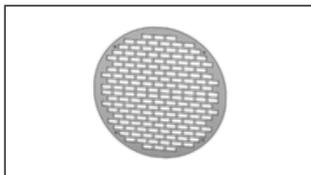

- Inlet protection grille for Etaline
- Galvanized steel sheet

SDS 450 | 169613



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\text{-} = 7,5\text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10\text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC}$ - $2,5\text{A}/12\text{V DC}$
- Max. ambient temperature $50\text{ }^\circ\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10\text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10\text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10\text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50\text{ }^\circ\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50\text{ }^\circ\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10\text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 50 | 168752



- Potentiometer with multifunction output
- $230\text{ VAC } \pm 10\% / 50-60\text{ Hz}$
- Selectable output: $1-10\text{ VDC} / 2-20\text{ mA}$ / $10-100\% \text{ PWM}$
- Min. and max. output value adjustable

UniControl 01 | 175813



- Universal fan controller
- Output signal $2 \times 0-10\text{V}$
- Main supply $100\text{V} - 240\text{V } 50/60\text{Hz}$

