

EL 560 EC O 01


164094

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Housing made of aluminum



FAN CURVES

Name	Value	Unit
Volume flow	0	m ³ /h
Pressure	0	Pa

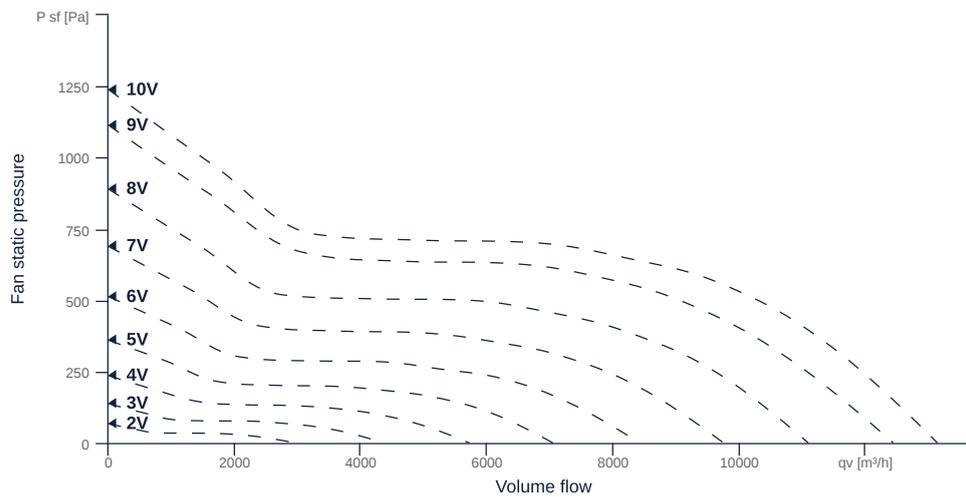

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN560		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		matcasing
Impeller material	Aluminium		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP54		IPebox
Weight	32.9	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	2547	2547	w	P _{ed, max}
Max. operating current (device)	3.92	3.92	A	I _{ed, max}
Max. speed	2000	2000	rpm	n _{max}
Max. stat. efficiency	58	58	p	η _{es}
Max. fan efficiency	63	63	p	η _e
Max. flowrate	13135	13135	CmH	Q _{v, max}
Max. stat pressure	1240	1240	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-20	-20	°C	T _{amb, min}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Rated voltage	400		v	U _{rated, f1}
Rated current	8.6		A	I _{rated, f1}
Nominal power	4000		w	P _a
Speed	3000		rpm	n _{f1}
Efficiency	90.7		p	η _{m, f1}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2002	rpm	n _{opt}
Efficiency level	66.4	p	N
Efficiency category	total		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	2.37	kw	P _{e, opt}
Overall efficiency	72.9	p	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	658	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	8281	CmH	Q _{v, opt}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

EL 560 EC O 01

164094


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

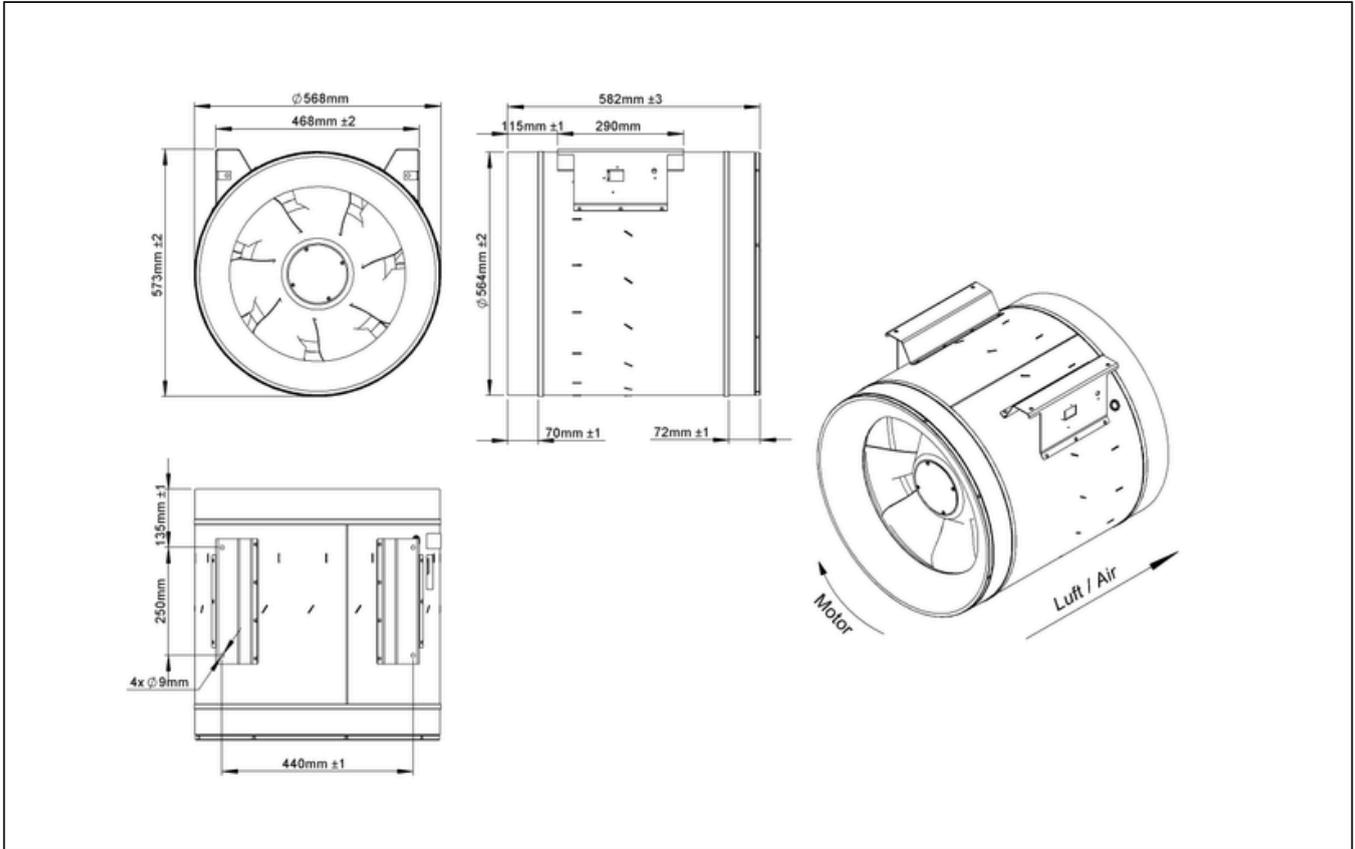

to the product detail page


EL 560 EC O 01

164094

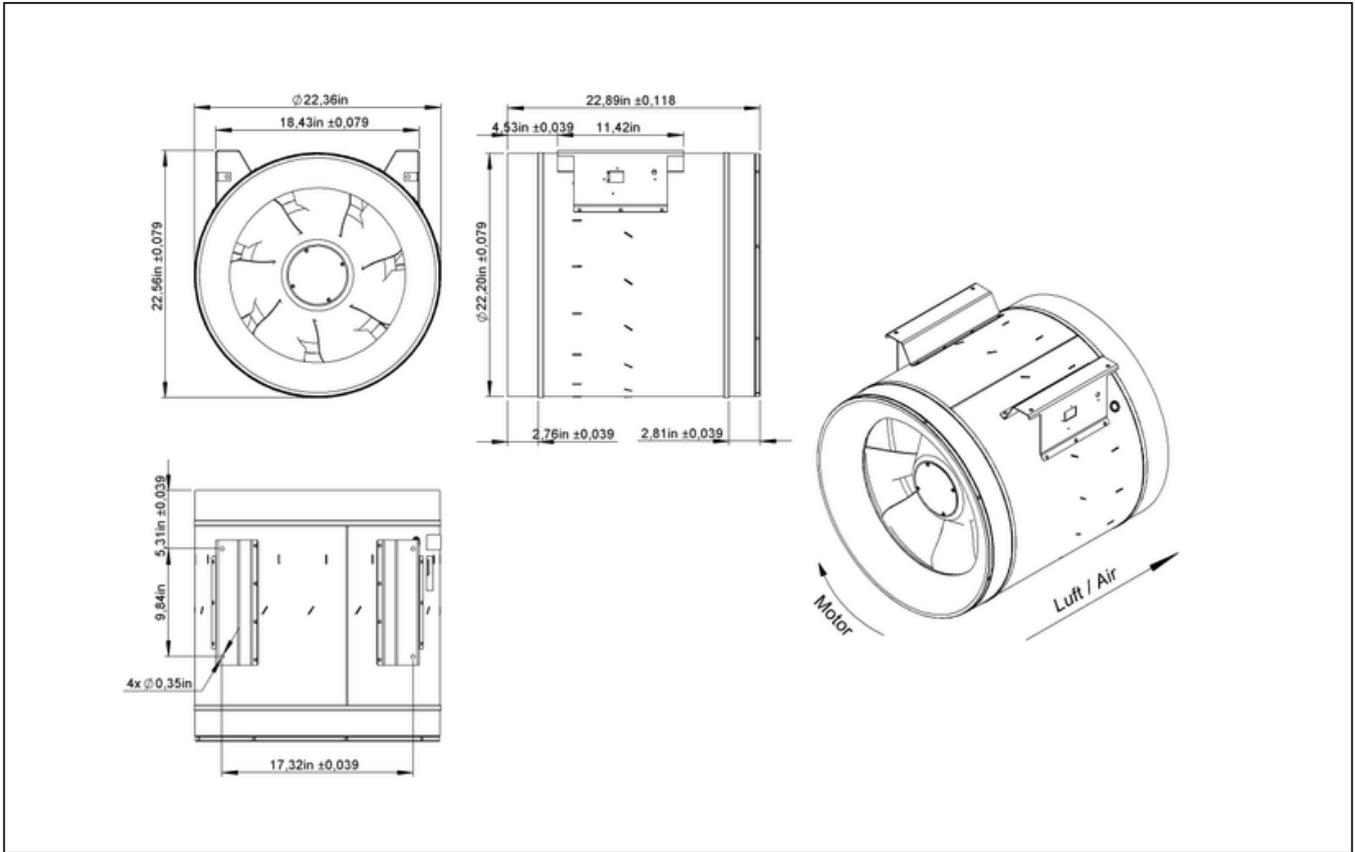

EL 560 EC O 01


164094

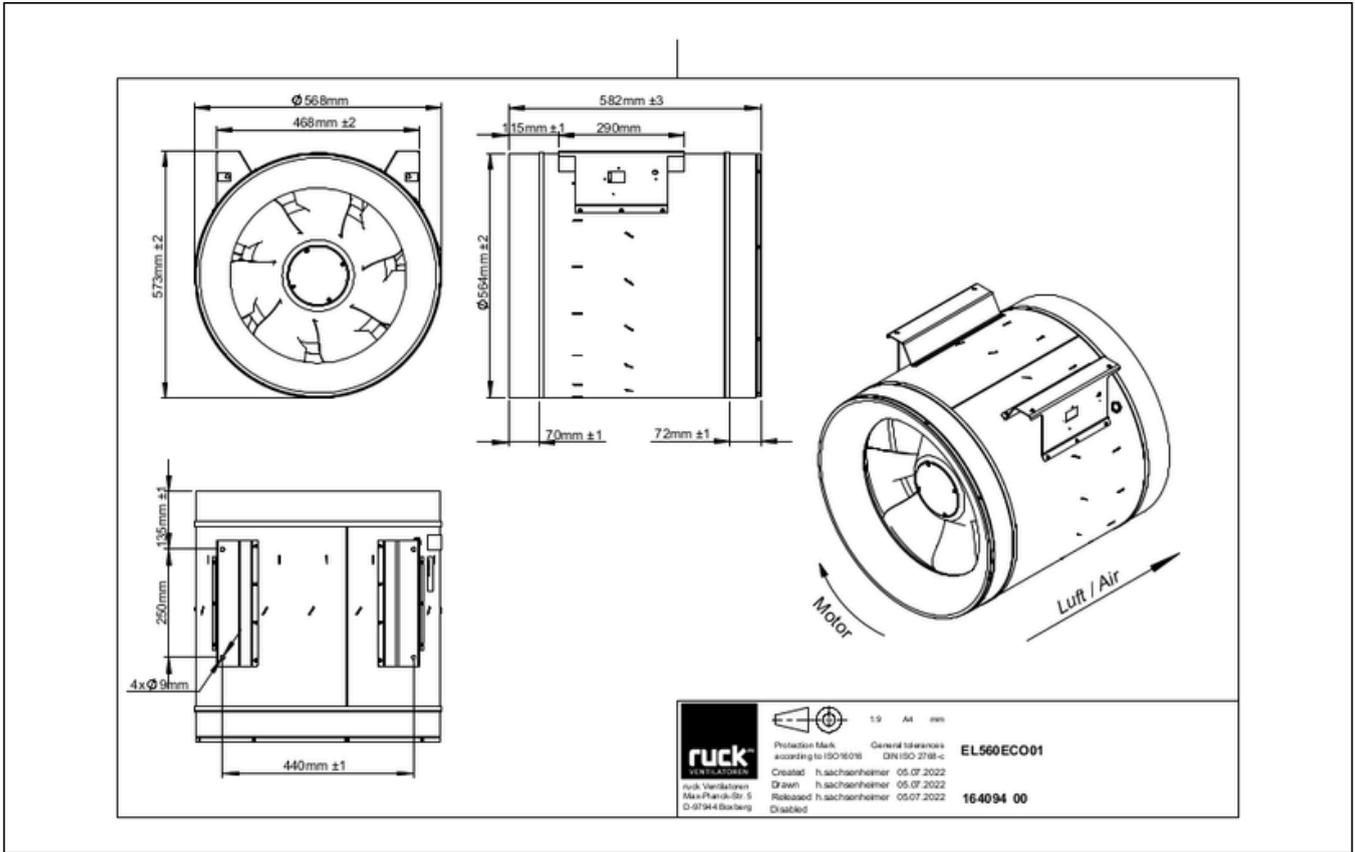



to the product detail page

EL 560 EC O 01

164094

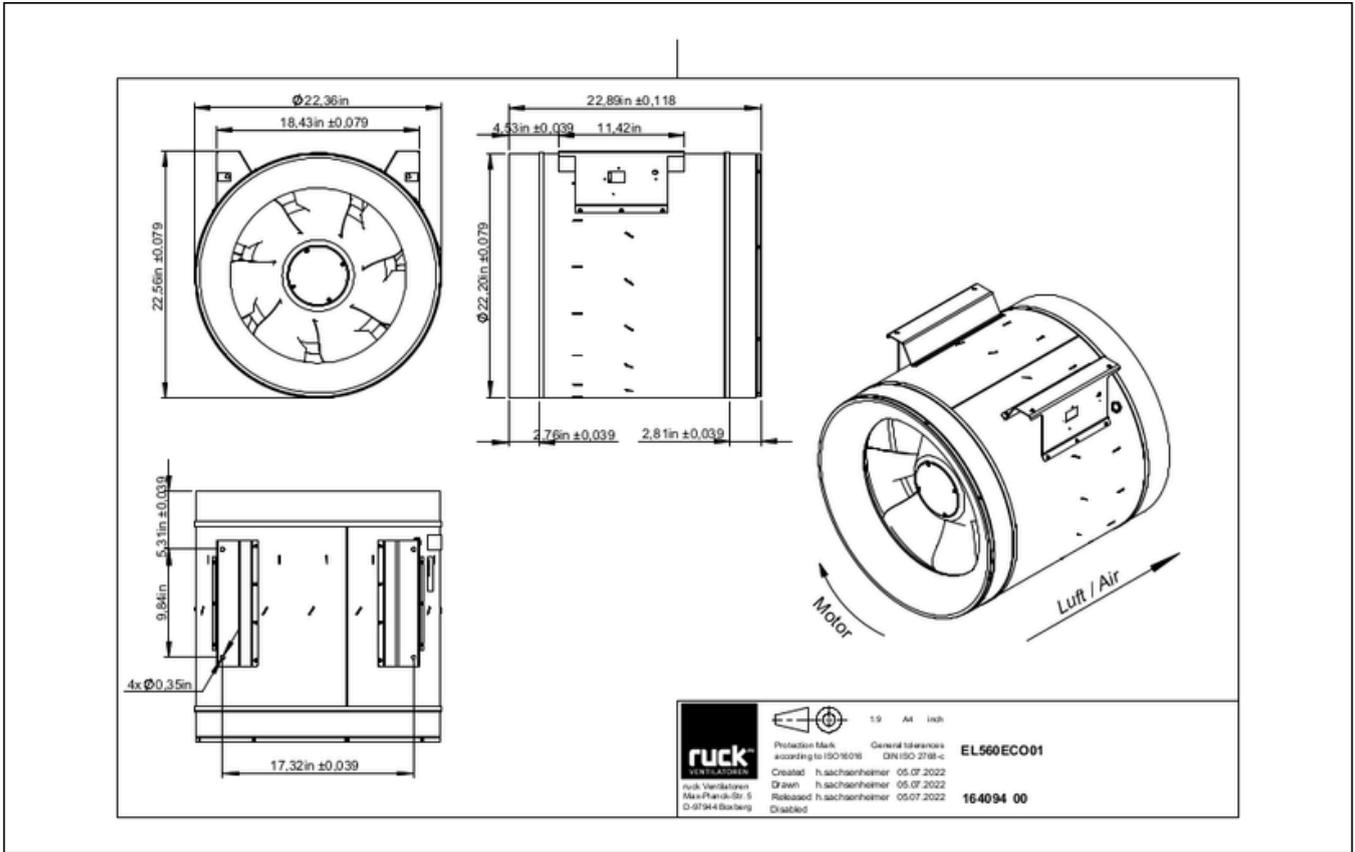

to the product detail page

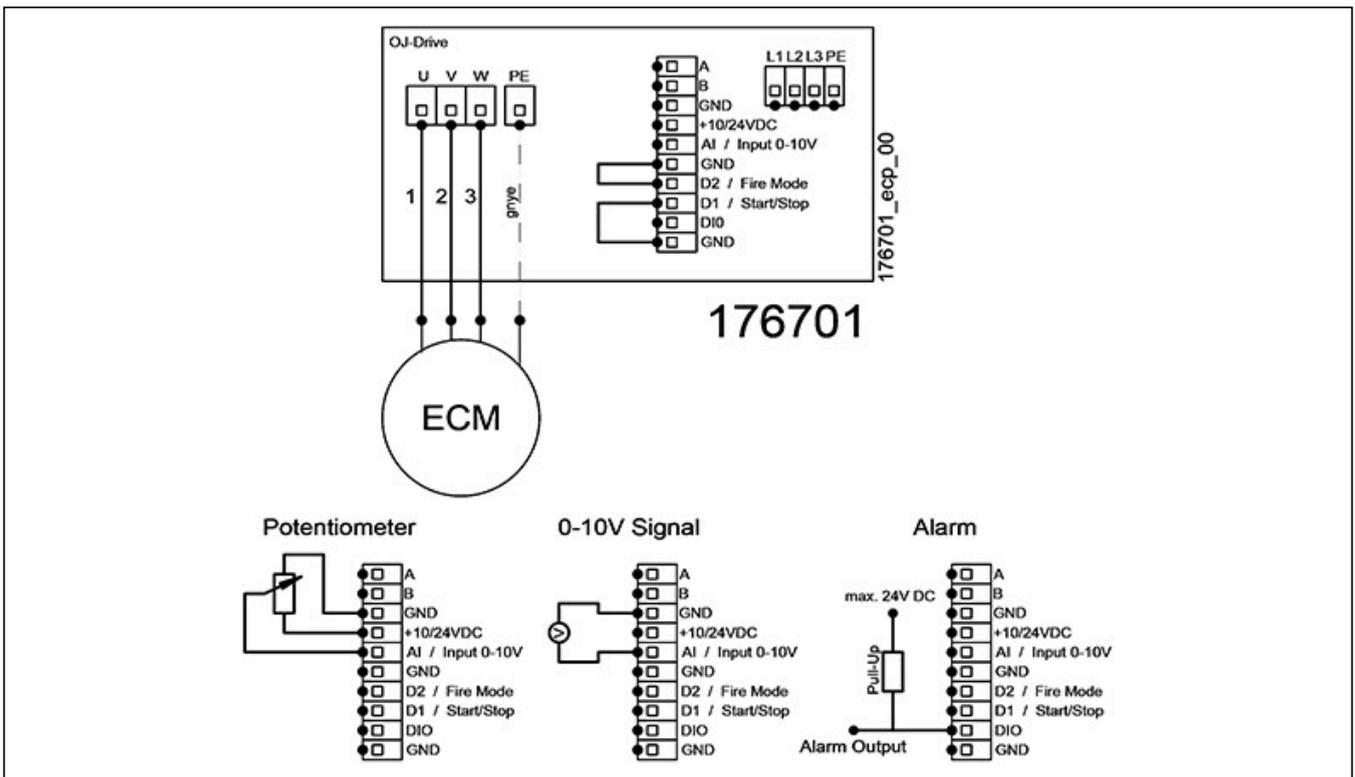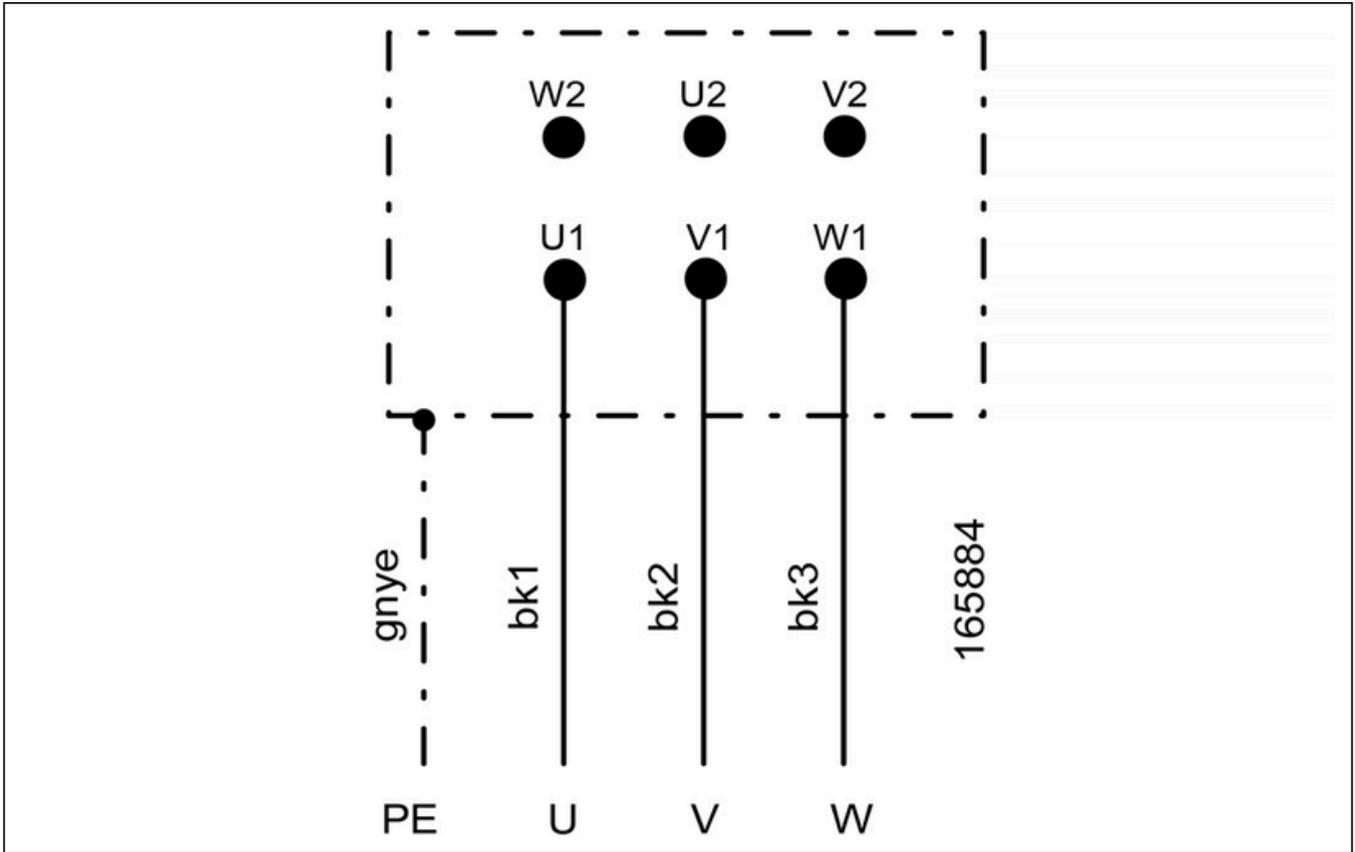

EL 560 EC O 01

164094


MECHANICAL ACCESSORIES

VM 560 | 119496



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 560 02 | 119412

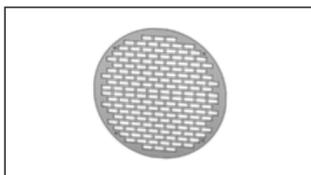

- Inlet protection grille for Etaline
- Galvanized steel sheet

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, I_{max} = 25 A
- Switching capacity 400 V 3~ = 7,5 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer 10 kΩ
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 kΩ
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 kΩ
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641




- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

OJ RM 02 | 141890



- Extension board Relais Modul
- For EC controller for alarm and operating message
- Electrical connection through 6 spring terminals (max. 2.5 mm²)
- Digital relay outputs: 2 potential-free changeover relays, max. 1 A, 30 V DC / 24 V AC

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC ±10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

UniControl 01 | 175813



- Universal fan controller
- Output signal 2 x 0-10V
- Main supply 100V - 240V 50/60Hz



to the product detail page