

MPS 225 E2 21


137879

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- AC motor outside the airflow, controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

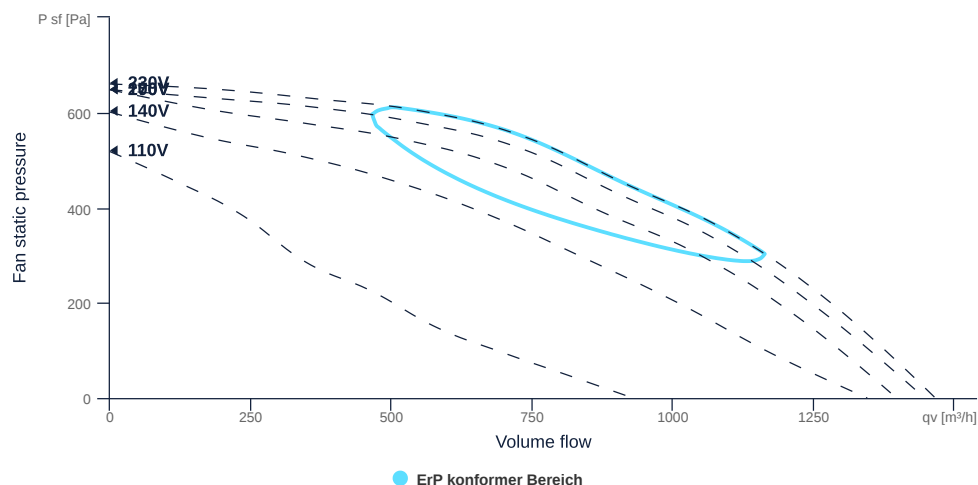

to the product detail page

MPS 225 E2 21

137879

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN200		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Coated steel		mat _{impeller}
Weight	30.5	kg	m
Nominal air flow rate, nominal point m³/h	1112.4	CmH	q _{v,nom}
Nominal external pressure, static	339	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.31	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.29	kw	P _{e,nom}
Face velocity, nominal point	9.85	mps	v _{nom}
Nominal external pressure, static	339	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	46.5	p	η _{es,SUP}
Highest external air leakage rate	0.07	p	
Enclosure sound level, nominal point	70	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	287	w	P _{ed, max}
Max. operating current (device)	2.31	A	I _{ed, max}
Max. speed	2900	rpm	n _{max}
Max. stat. efficiency	38.5	p	η _{es}
Max. fan efficiency	41.4	p	η _e
Max. flowrate	1460	CmH	q _{v, max}
Max. stat pressure	660	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	80	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	110	v	U _{min}



to the product detail page

MPS 225 E2 21

137879



MOTOR DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAO		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		8	µF	Ccond
Voltage capacitor		400	v	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		v	Urated, f1
Rated current	1.6		A	Irated, f1
Nominal power	250		w	Pa
Speed	2720		rpm	nf1
Min. temperature	-25		°C	Tmotor, min
Cos Phi	0.990000	0.000000		cos φ
UL-Certification motor		None		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

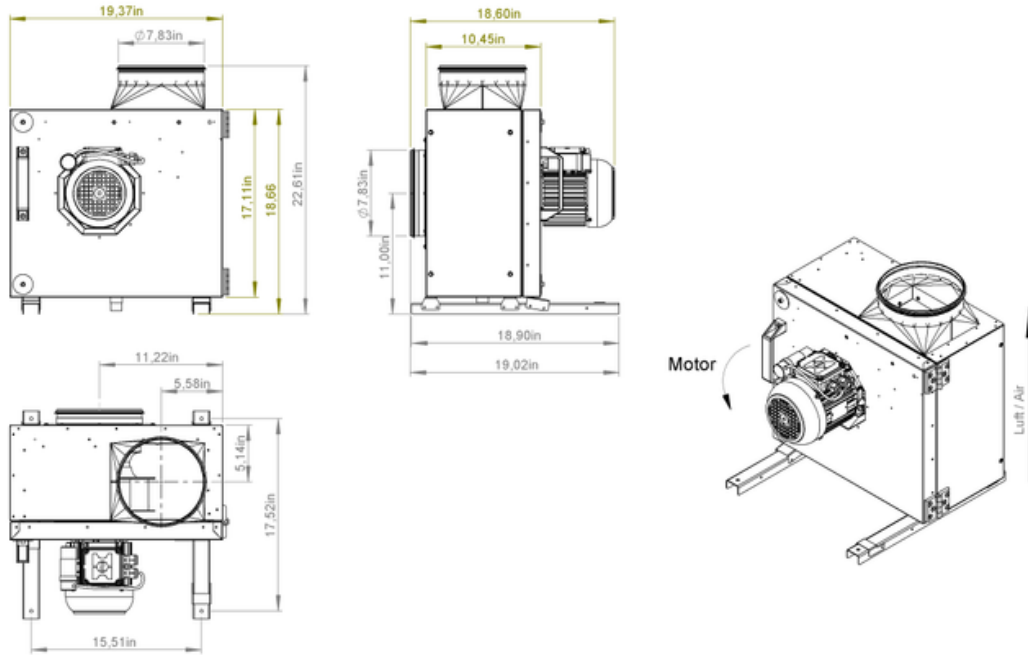


137879 03



MPS 225 E2 21

137879

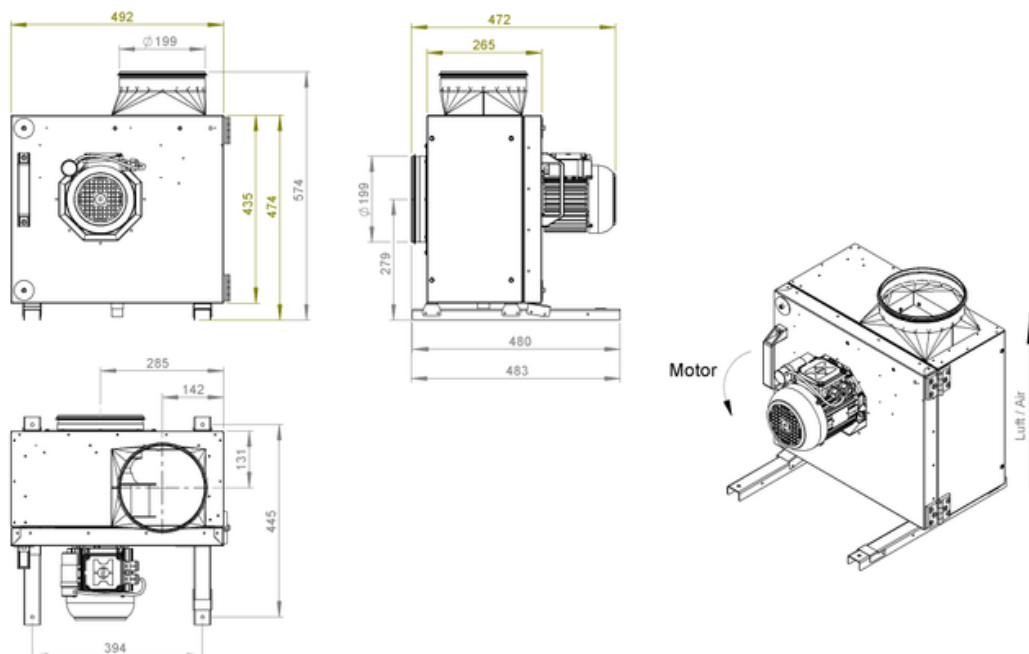

137879 03




to the product detail page

MPS 225 E2 21

137879


ruck

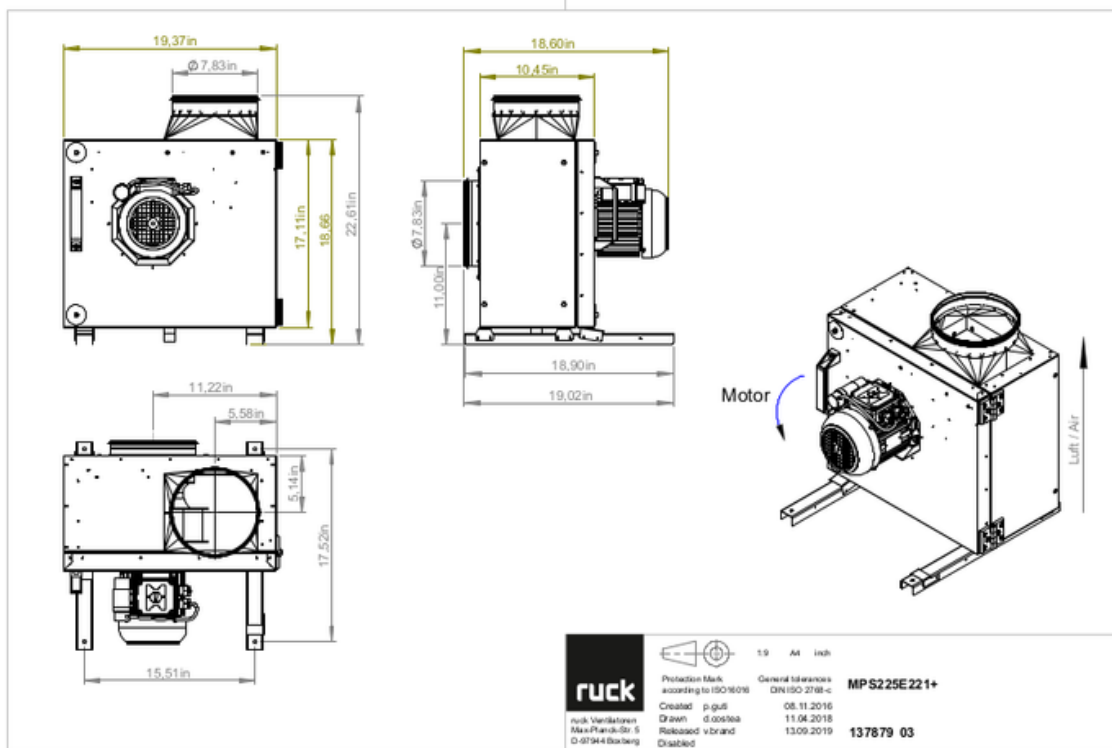

MPS 225 E2 21


137879

ruck

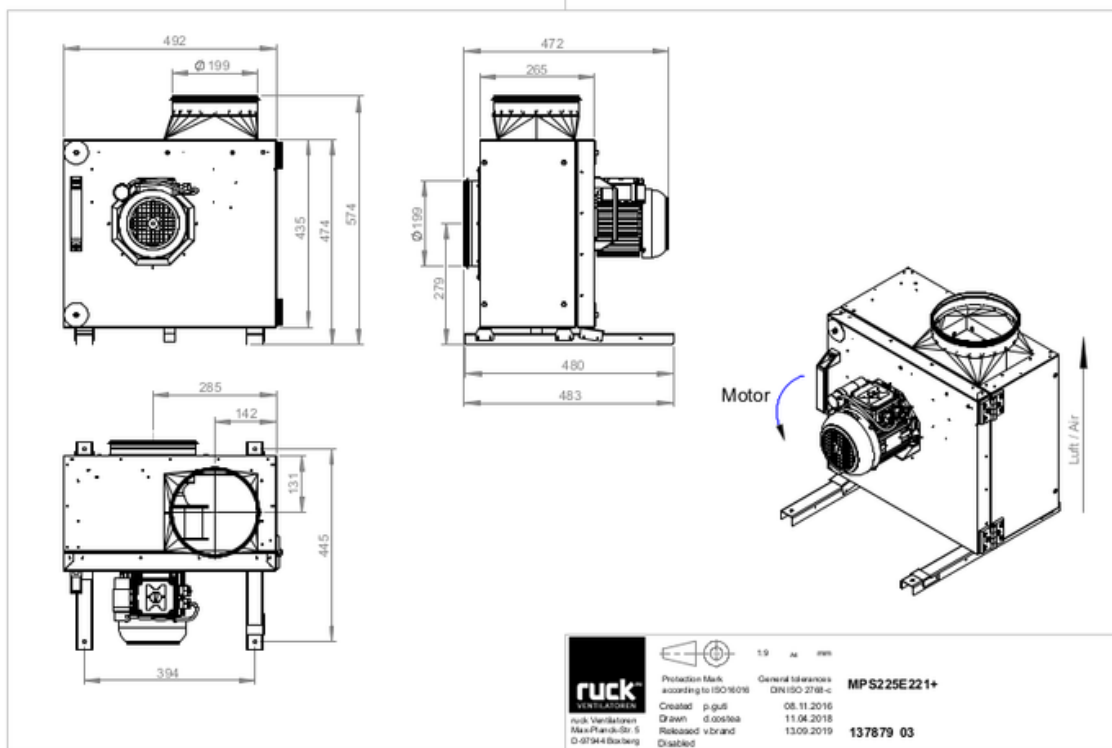

MPS 225 E2 21

137879

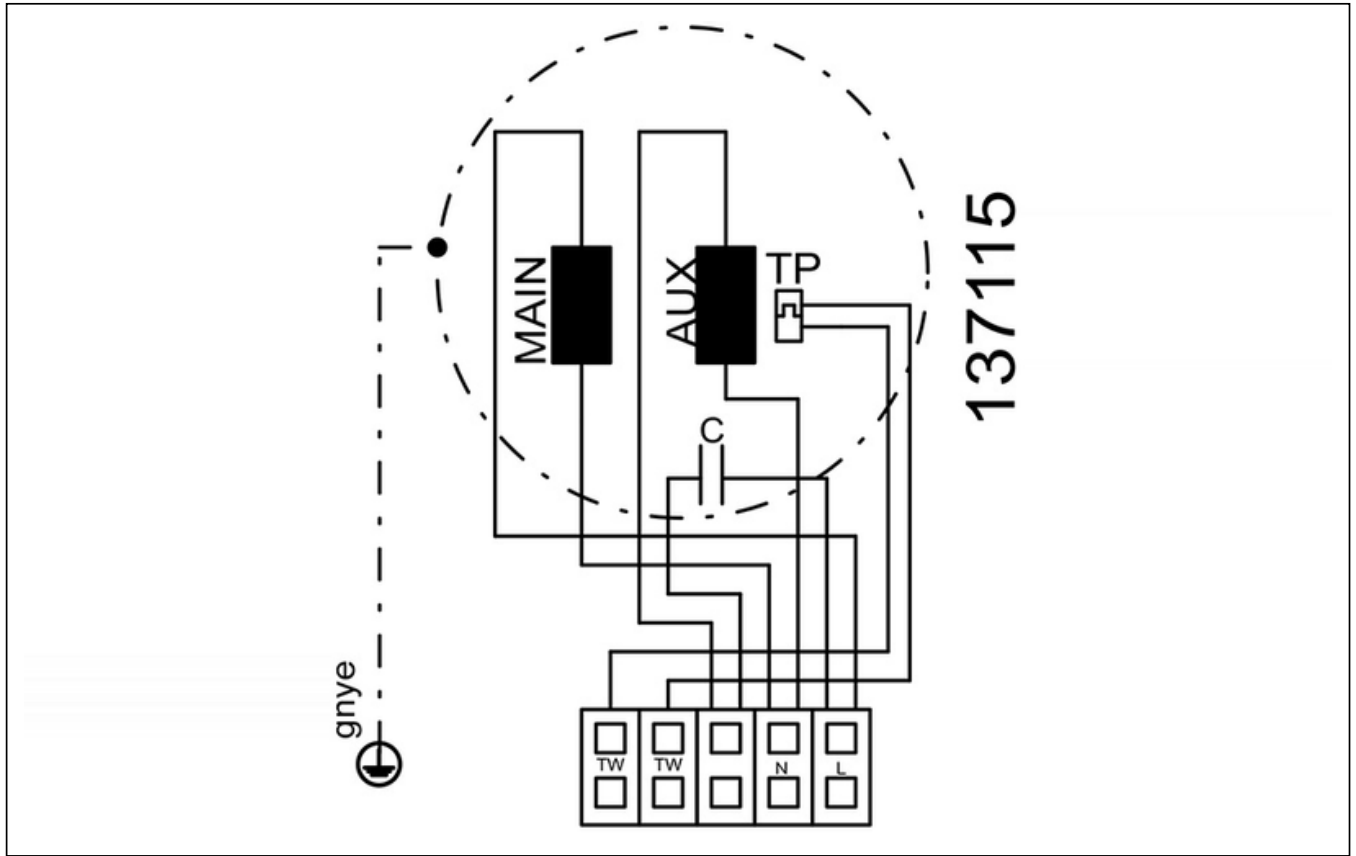

to the product detail page