

MPS 250 D2 40


156623

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

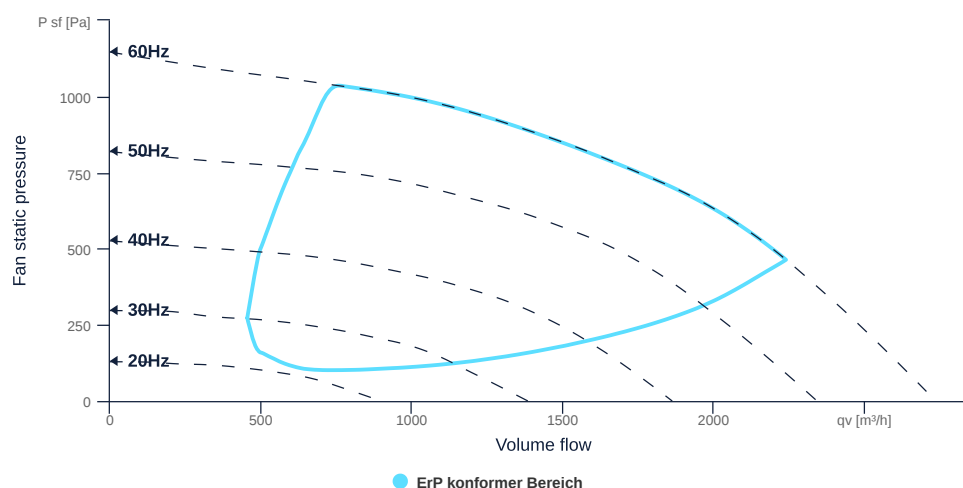

to the product detail page

MPS 250 D2 40

156623

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Coated steel		matimpeller
Weight	38	kg	m
Nominal air flow rate, nominal point m³/h	2239.2	CmH	q _{v,nom}
Nominal external pressure, static	464	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.62	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.72	kw	P _{e,nom}
Face velocity, nominal point	12.68	mps	v _{nom}
Nominal external pressure, static	464	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	40.01	p	η _{es,EHA}
Enclosure sound level, nominal point	72.92	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	756	w	P _{ed, max}
Max. operating current (device)	1.28	A	I _{ed, max}
Max. speed	3480	rpm	n _{max}
Max. stat. efficiency	46.4	p	η _{es}
Max. fan efficiency	50	p	η _e
Max. flowrate	2730	CmH	q _{v, max}
Max. stat pressure	1130	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}
Min. voltage	400	v	U _{min}



to the product detail page

MPS 250 D2 40

156623



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Connection	Δ	Δ		wiringw1
Connection (wiring 2)	Y	Y		wiringw2
Rated voltage	230	265	v	Urated, f1
Rated voltage (wiring 2)	400	460	v	Urated, f2
Rated current	2.26	2.04	A	Irated, f1
Rated current (wiring 2)	1.31	1.18	A	Irated, f2
Nominal power	550	550	w	Pa
Nominal power (wiring 2)	550	550	w	Pout, f2
Speed	2808	3433	rpm	n _{r1}
Speed (wiring 2)	2808	3433	rpm	n _{r2}
Efficiency	77.8	76.8	p	η _{m, f1}
Efficiency (wiring 2)	77.8	76.8	p	η _{m, f2}
Efficiency class	IE3	IE3		IEmotor
Min. temperature	-30	-30	°C	T _{motor, min}
Cos Phi	0.800000	0.780000		cos φ
UL-Certification motor		None		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

MPS 250 D2 40

156623

ruck


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

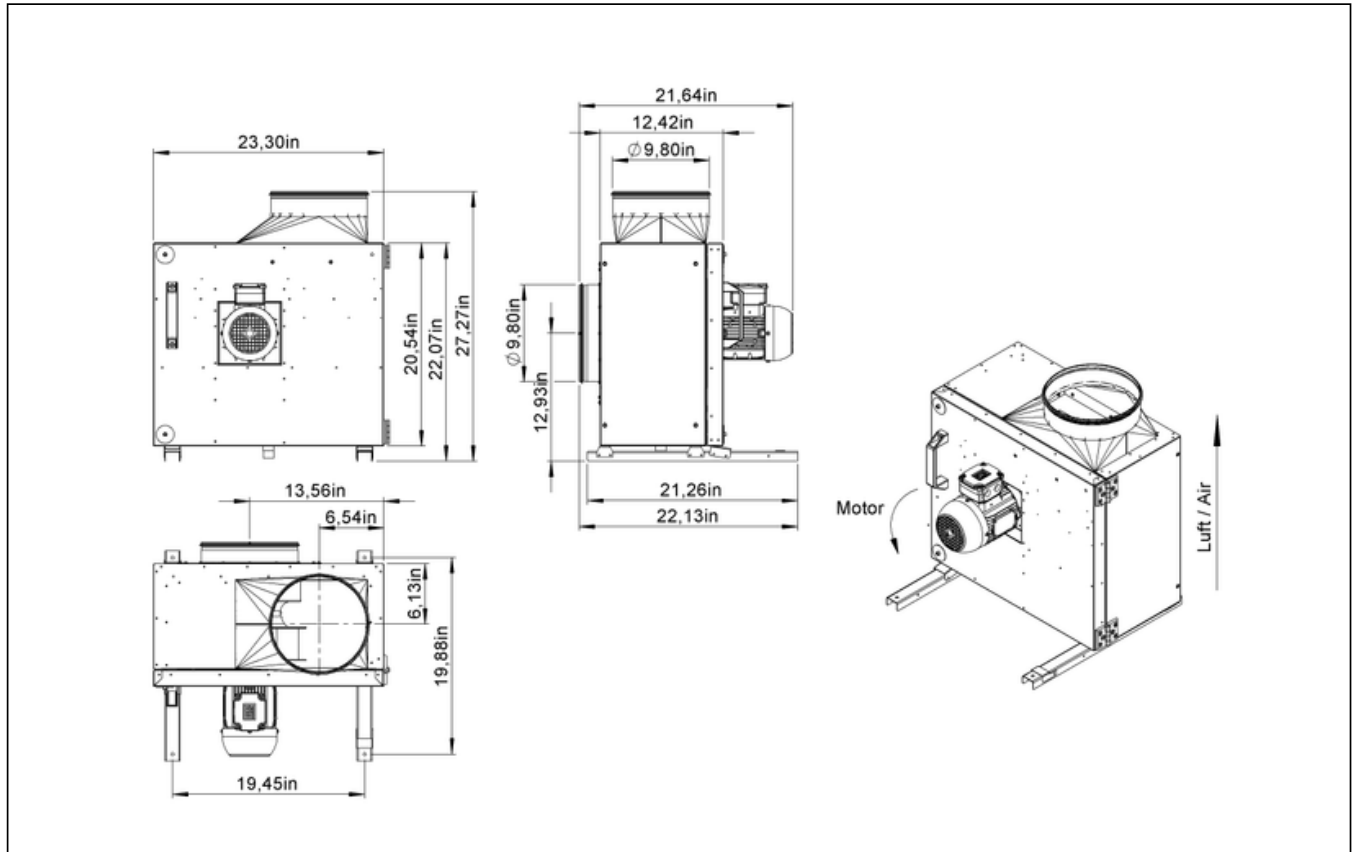

to the product detail page

MPS 250 D2 40

156623

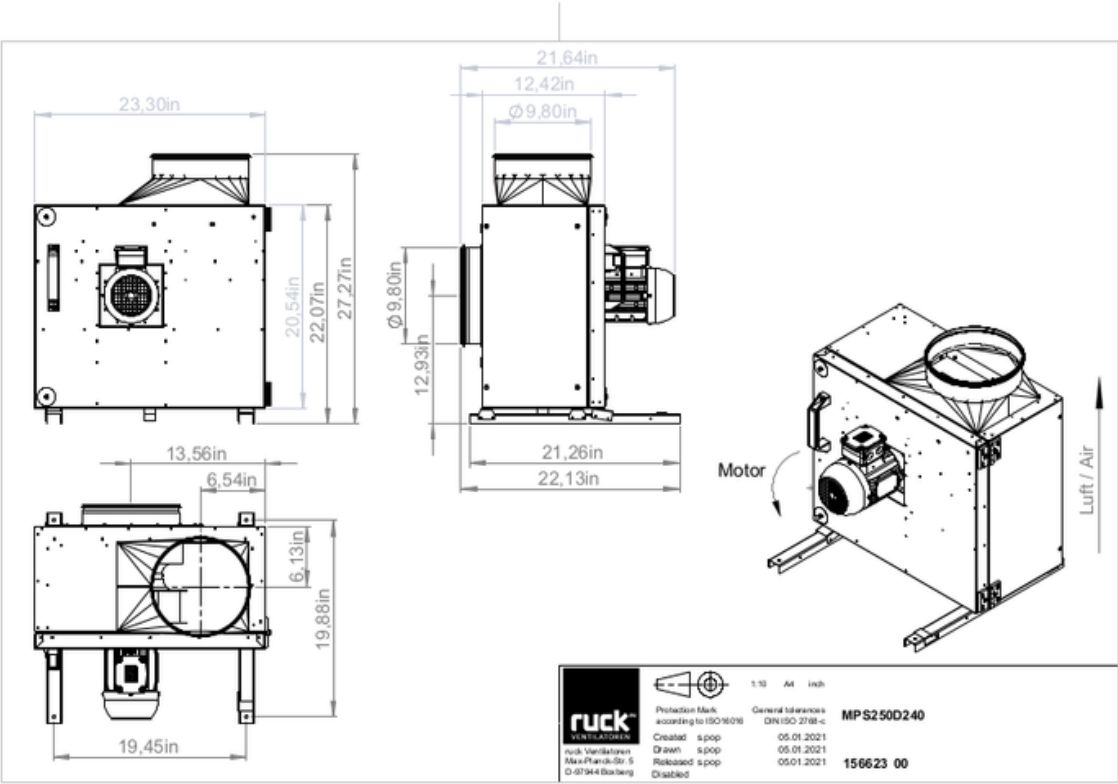


to the product detail page

MPS 250 D2 40

156623



ruck

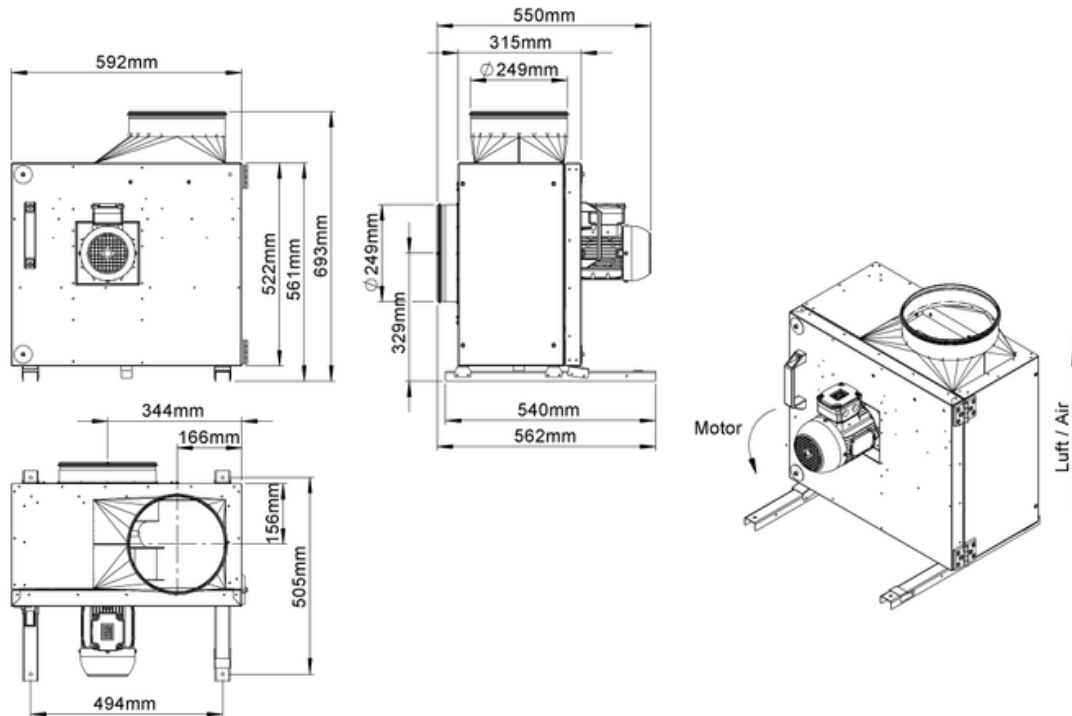

to the product detail page

MPS 250 D2 40

156623

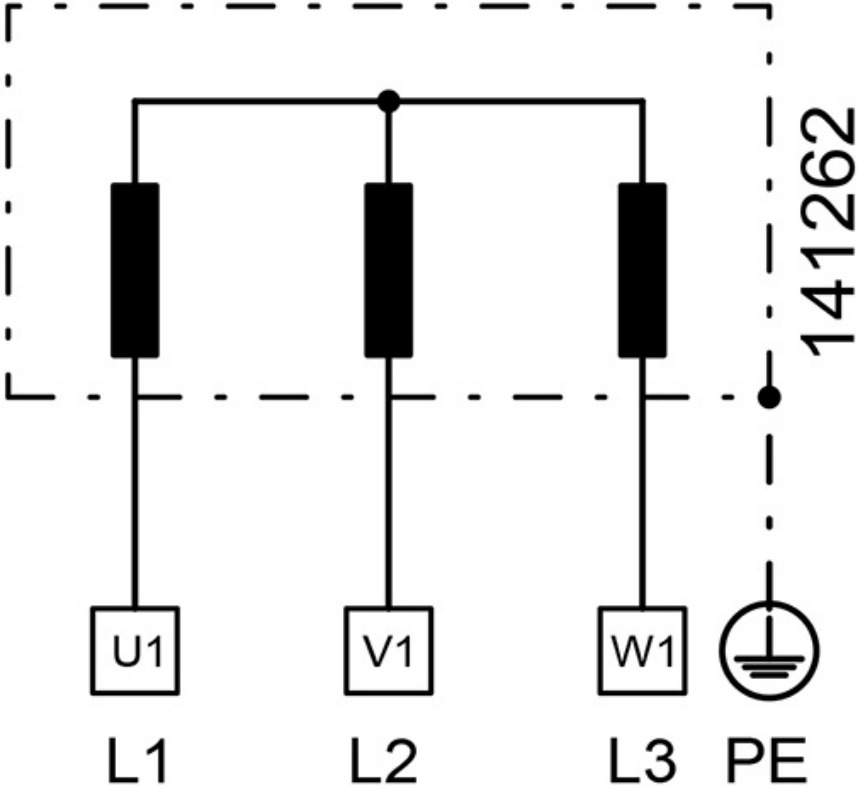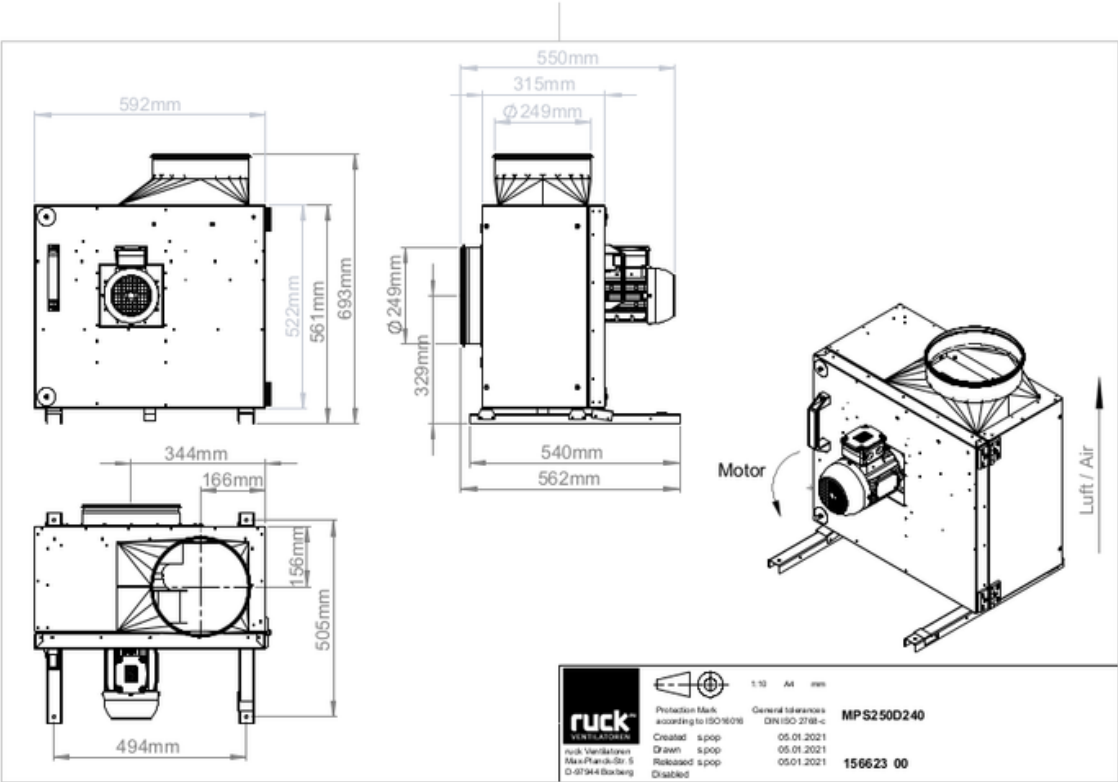

to the product detail page

MPS 250 D2 40

156623



to the product detail page