

MPS 280 D2 40


156624

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

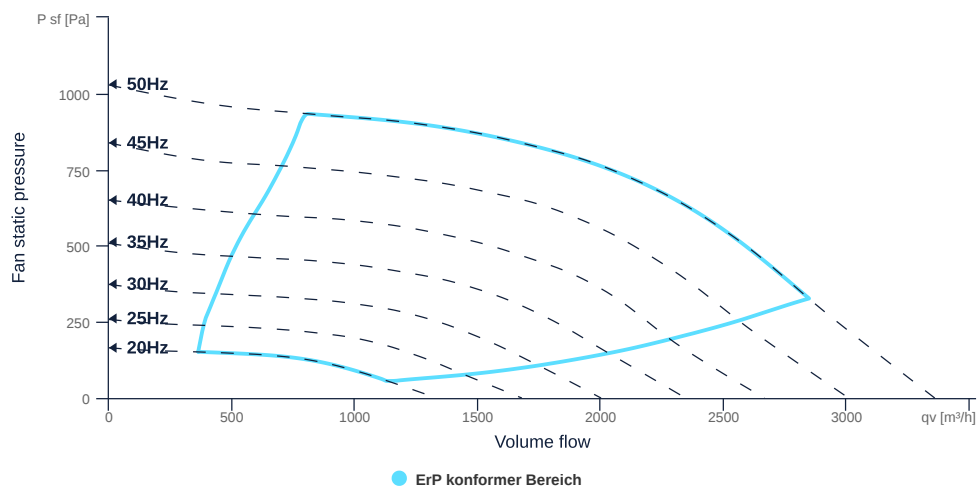

to the product detail page

MPS 280 D2 40

156624

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN315		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Coated steel		matimpeller
Weight	38.5	kg	m
Nominal air flow rate, nominal point m³/h	2023.2	CmH	q _{v,nom}
Nominal external pressure, static	753.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.56	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.75	kw	P _{e,nom}
Face velocity, nominal point	7.2	mps	v _{nom}
Nominal external pressure, static	753.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	56.5	p	η _{es,SUP}
Highest external air leakage rate	0.01	p	
Enclosure sound level, nominal point	77	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	759	w	P _{ed, max}
Max. operating current (device)	1.34	A	I _{ed, max}
Max. speed	2920	rpm	n _{max}
Max. stat. efficiency	52.4	p	η _{es}
Max. fan efficiency	54.8	p	η _e
Max. flowrate	3350	CmH	q _{v, max}
Max. stat pressure	1025	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPS 280 D2 40

156624

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwr _{sup} motor
Number of poles (1)		2.000000		num poles _{w1}
Connection	Δ	Δ		wiring _{w1}
Connection (wiring 2)	Y	Y		wiring _{w2}
Rated voltage	230	265	v	U _{rated, f1}
Rated voltage (wiring 2)	400	460	v	U _{rated, f2}
Rated current	2.26	2.04	A	I _{rated, f1}
Rated current (wiring 2)	1.31	1.18	A	I _{rated, f2}
Nominal power	550	550	w	P _a
Nominal power (wiring 2)	550	550	w	P _{out, f2}
Speed	2808	3433	rpm	n _{r1}
Speed (wiring 2)	2808	3433	rpm	n _{r2}
Efficiency	77.8	76.8	p	η _{m, f1}
Efficiency (wiring 2)	77.8	76.8	p	η _{m, f2}
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-30	-30	°C	T _{motor, min}
Cos Phi	0.800000	0.780000		cos φ
UL-Certification motor		None		UL _{cert}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

MPS 280 D2 40

156624

ruck


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

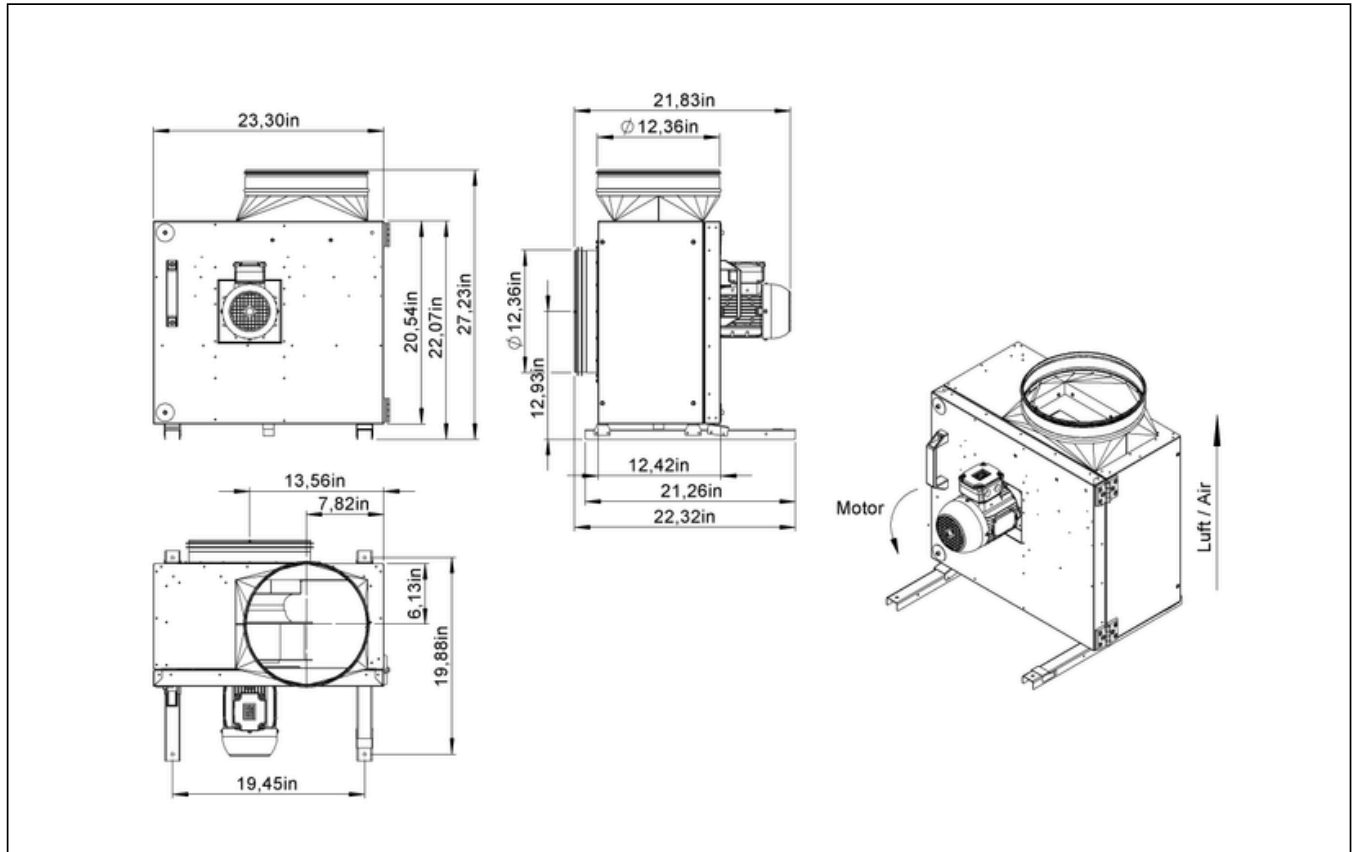

to the product detail page

MPS 280 D2 40

156624

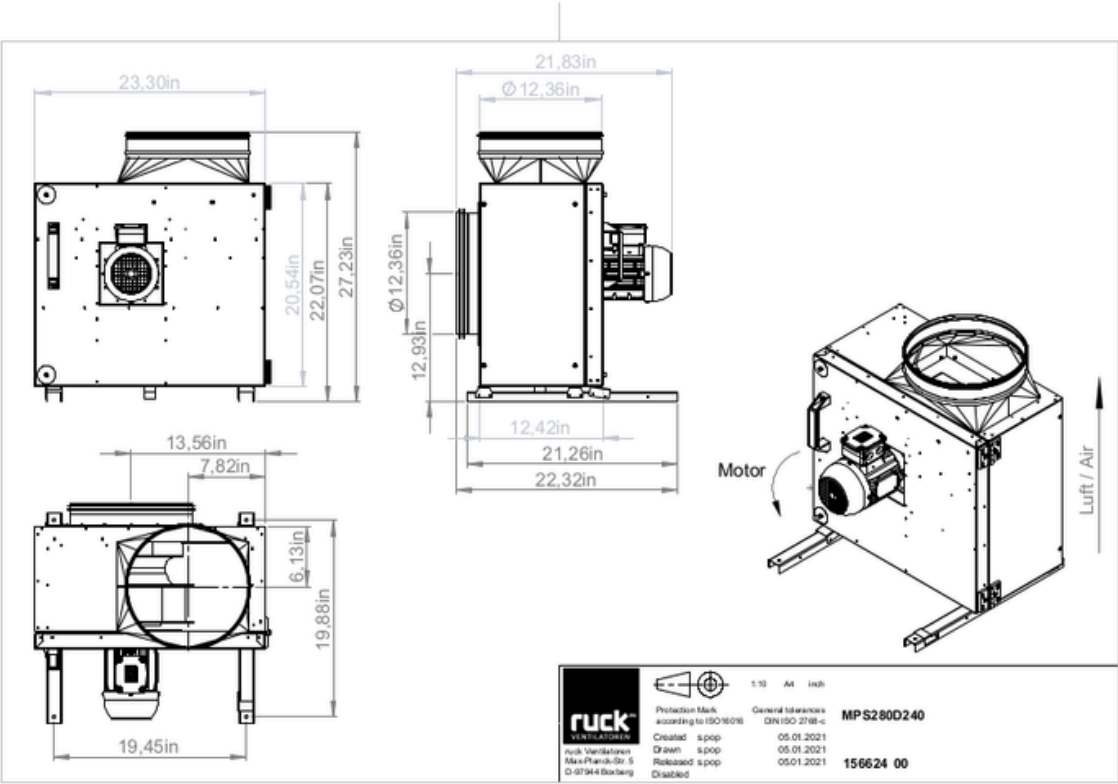


to the product detail page

MPS 280 D2 40

156624



ruck

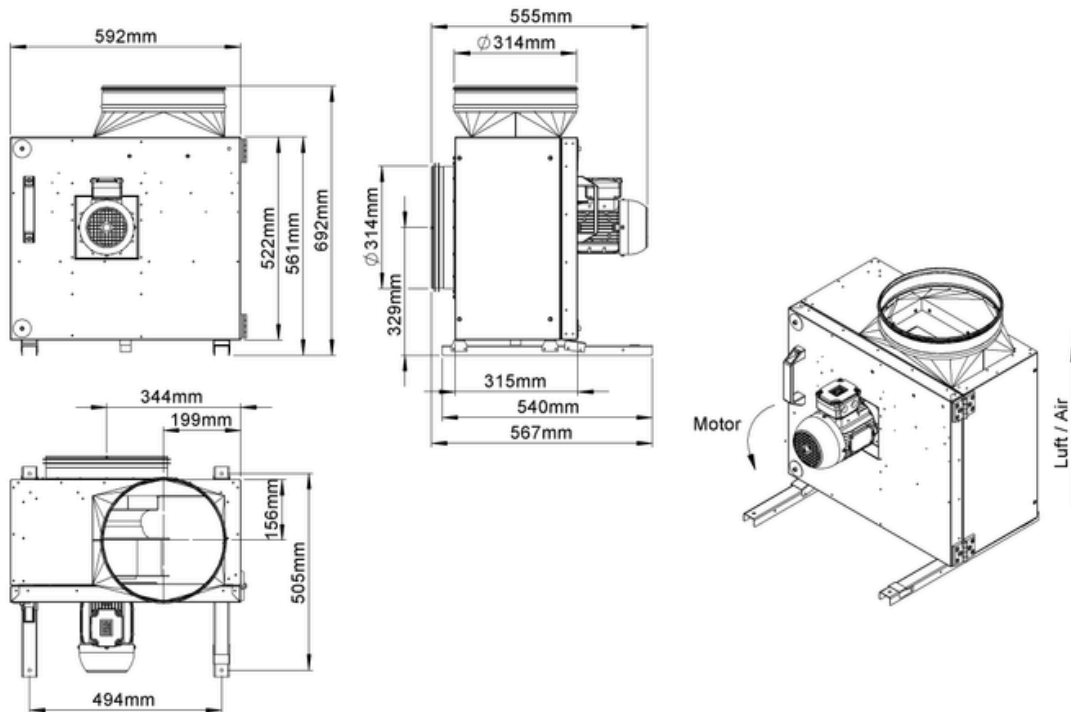

to the product detail page

MPS 280 D2 40

156624

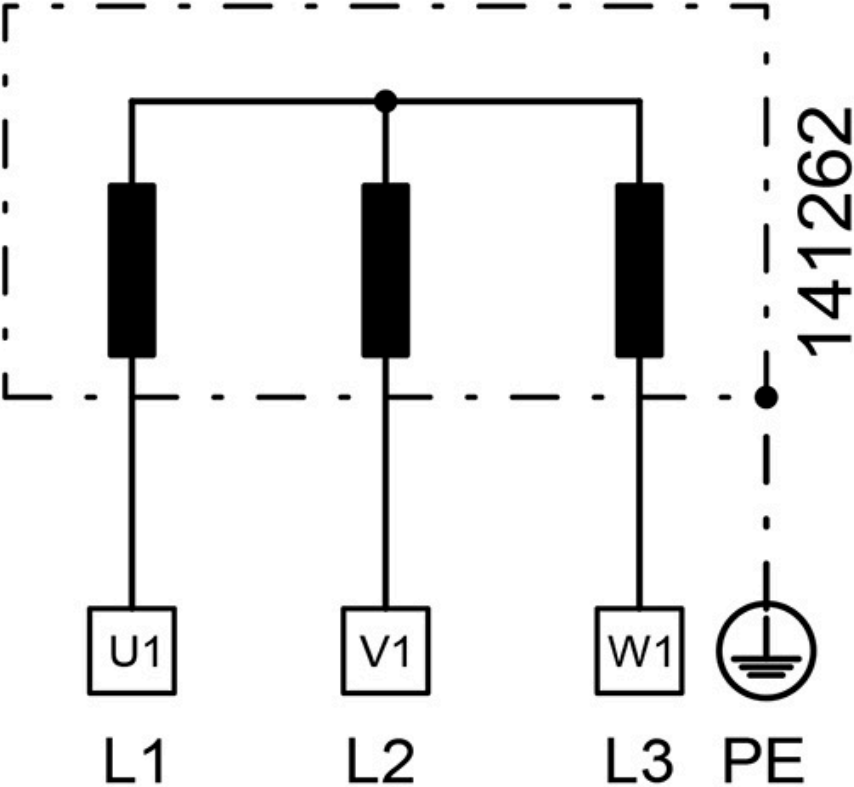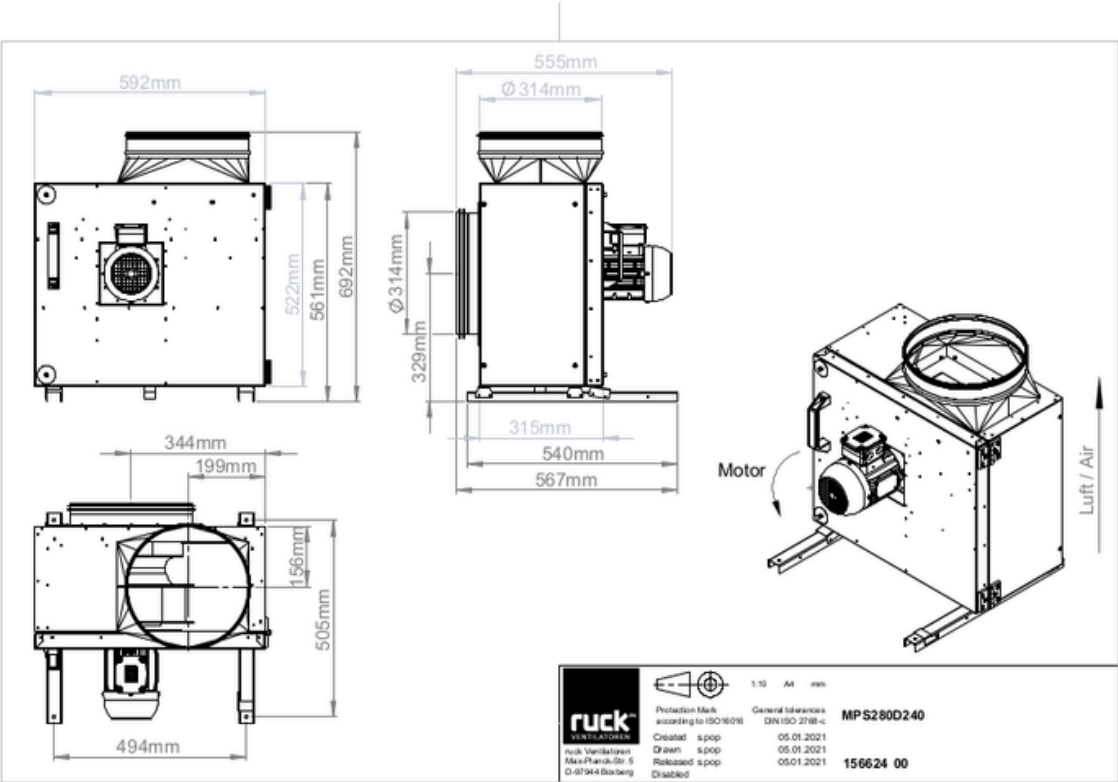

to the product detail page

MPS 280 D2 40

156624



to the product detail page