

MPS 280 D2 F4 30


145832

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Smoke extract fan F400, 200 °C continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

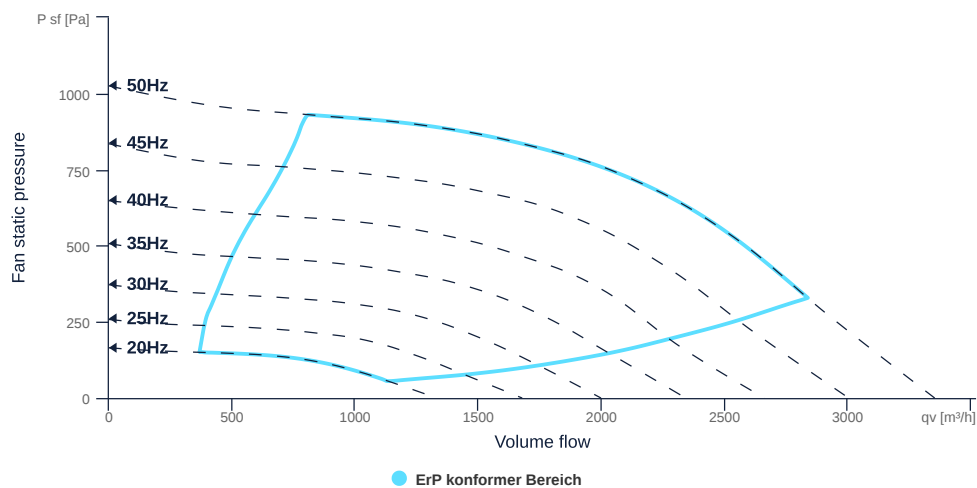

to the product detail page

MPS 280 D2 F4 30

145832

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN315		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Coated steel		matimpeller
Weight	39.65	kg	m
Nominal air flow rate, nominal point m³/h	2782.8	CmH	q _{v,nom}
Nominal external pressure, static	367	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.77	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.67	kw	P _{e,nom}
Face velocity, nominal point	9.9	mps	v _{nom}
Nominal external pressure, static	367	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	51.6	p	η _{es,SUP}
Highest external air leakage rate	0.01	p	
Enclosure sound level, nominal point	77	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	759	w	P _{ed, max}
Max. operating current (device)	1.34	A	I _{ed, max}
Max. speed	2920	rpm	n _{max}
Max. stat. efficiency	52.4	p	η _{es}
Max. fan efficiency	54.8	p	η _e
Max. flowrate	3350	CmH	q _{v, max}
Max. stat pressure	1025	Pa	p _{sf, max}
Max. medium temperature	200	°C	T _{m, max}
Max. environment temperature	50	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPS 280 D2 F4 30

145832

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwr _{sup} motor
Number of poles (1)		2.000000		num poles _{w1}
Connection	Δ	Y		wiring _{w1}
Connection (wiring 2)	Y			wiring _{w2}
Rated voltage	230	460	v	U _{rated, f1}
Rated voltage (wiring 2)	400		v	U _{rated, f2}
Rated current	2.07	1.07	A	I _{rated, f1}
Rated current (wiring 2)	1.19		A	I _{rated, f2}
Nominal power	550	550	w	P _a
Nominal power (wiring 2)	550		w	P _{out, f2}
Speed	2770	3415	rpm	n _{r1}
Speed (wiring 2)	2770		rpm	n _{r2}
Starting current	12.2	7.81	A	I _{start, f1}
Starting current (wiring 2)	7.02		A	I _{start, f2}
Efficiency	77.8	76.8	p	η _{m, f1}
Efficiency (wiring 2)	77.8		p	η _{m, f2}
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
Cos Phi	0.860000	0.840000		cos φ
UL-Certification motor		UL recognized		UL _{cert}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Maximum resistance temperature	400	°C	T _{fire}
Maximum resistance time	120.000000		t _{fire}
Fire resistance class	F 400 (120)		F _{class}
Snow load class	-		SL _{class}




to the product detail page

MPS 280 D2 F4 30

145832

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

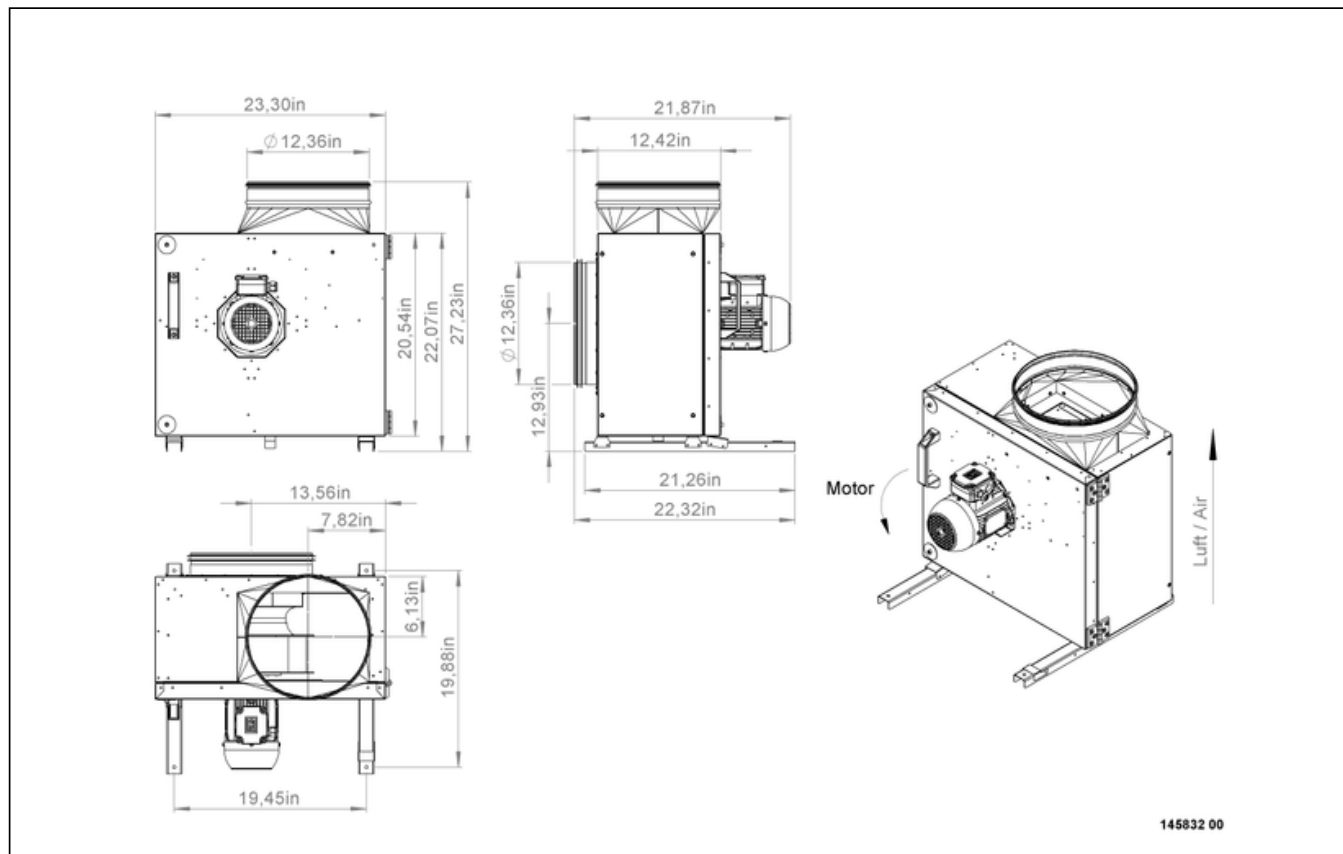


to the product detail page

MPS 280 D2 F4 30

145832

ruck

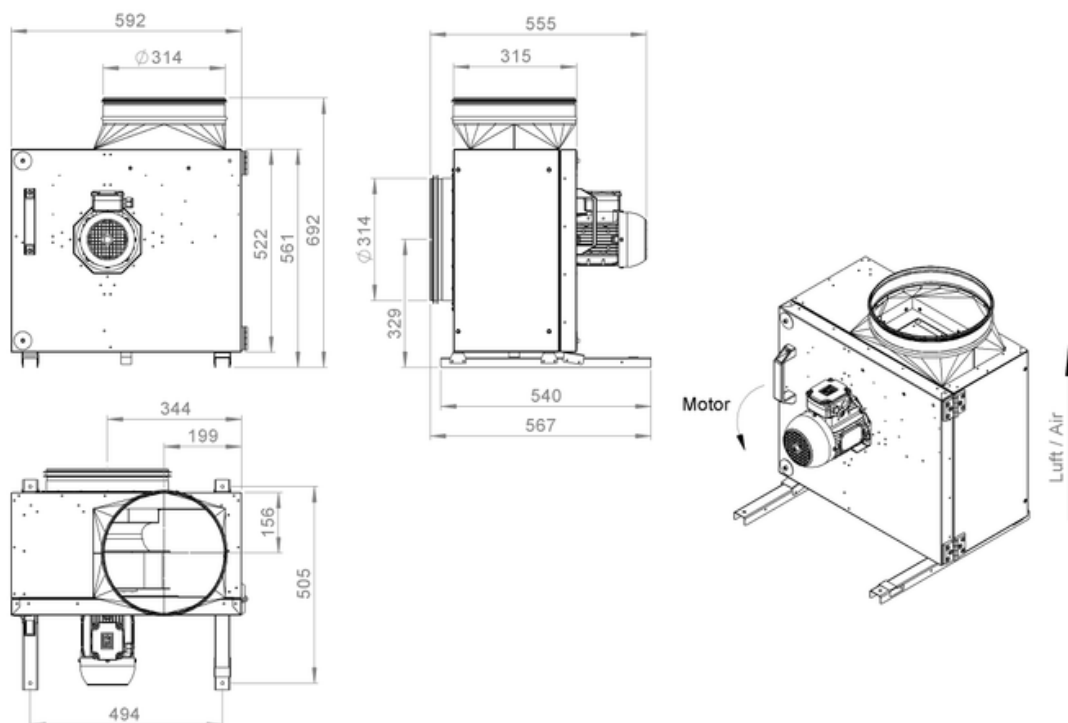


145832 00



MPS 280 D2 F4 30



145832

ruck

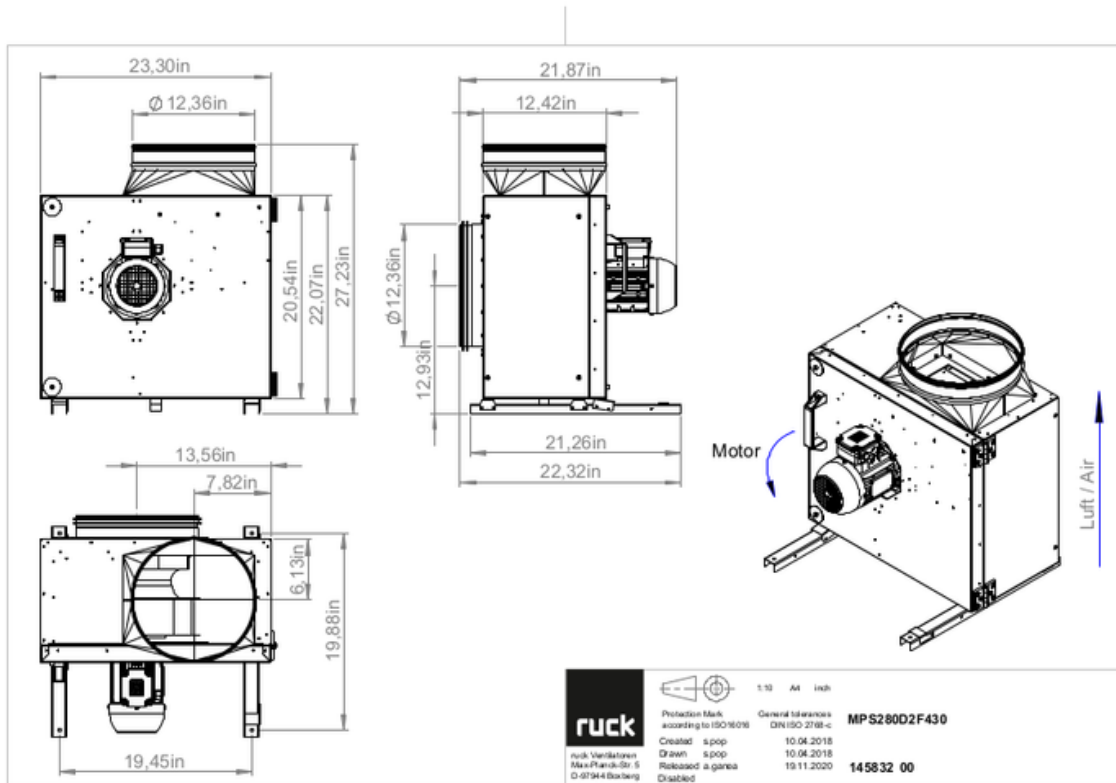

MPS 280 D2 F4 30

145832

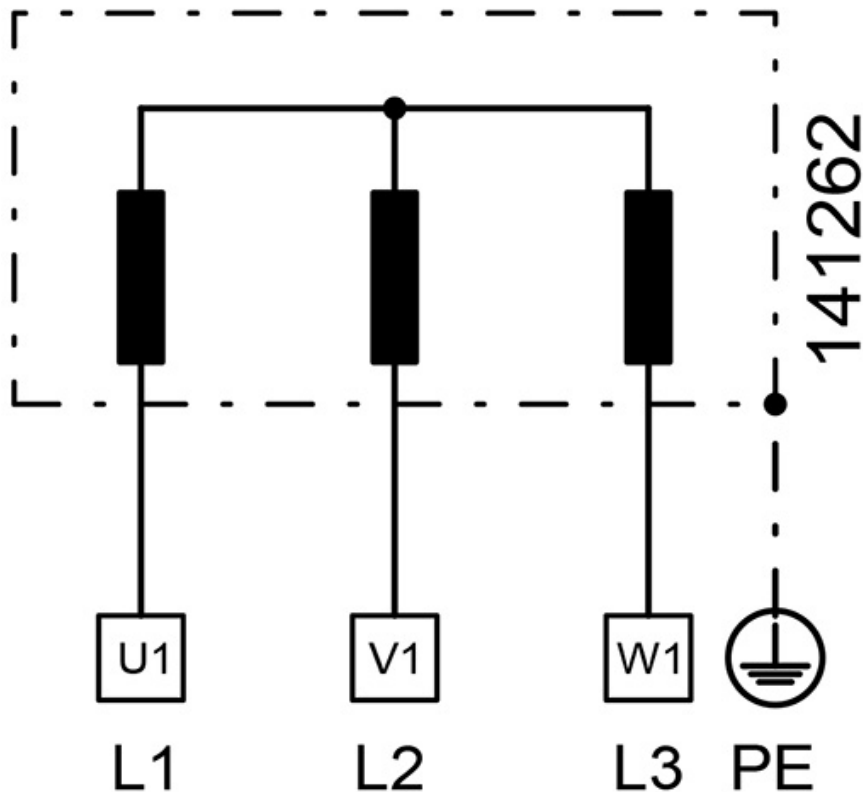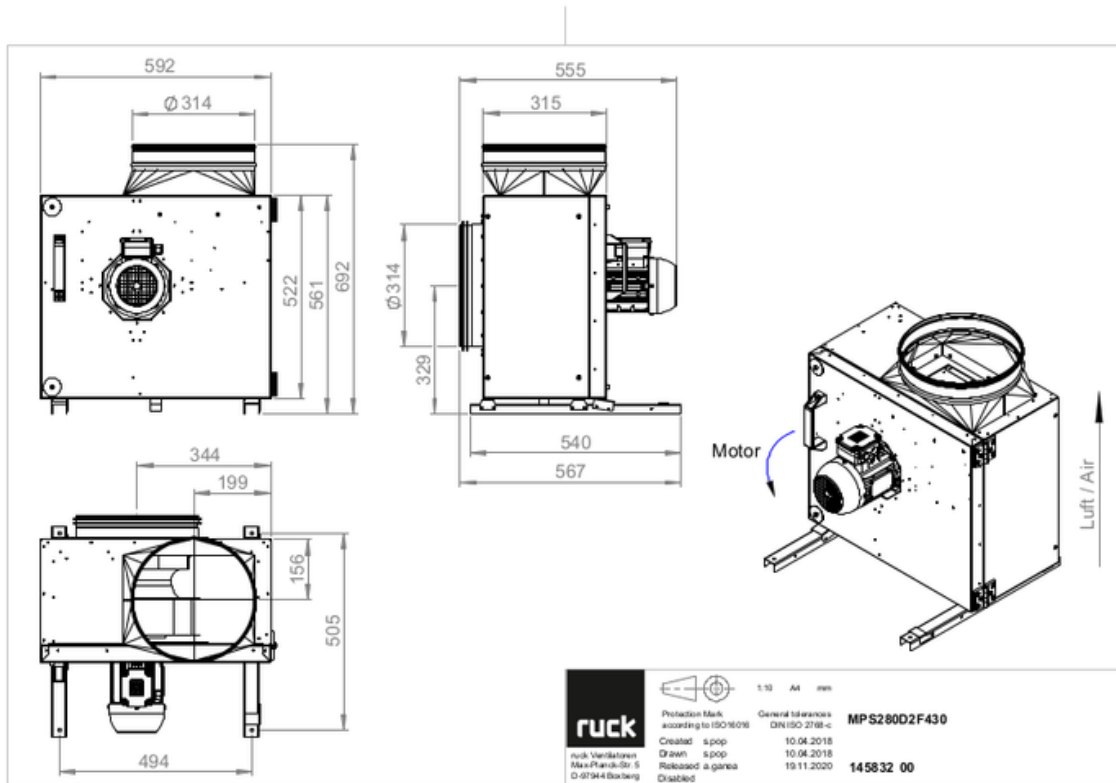

to the product detail page

MPS 280 D2 F4 30

145832



to the product detail page