

MPS 315 D4 40


156627

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

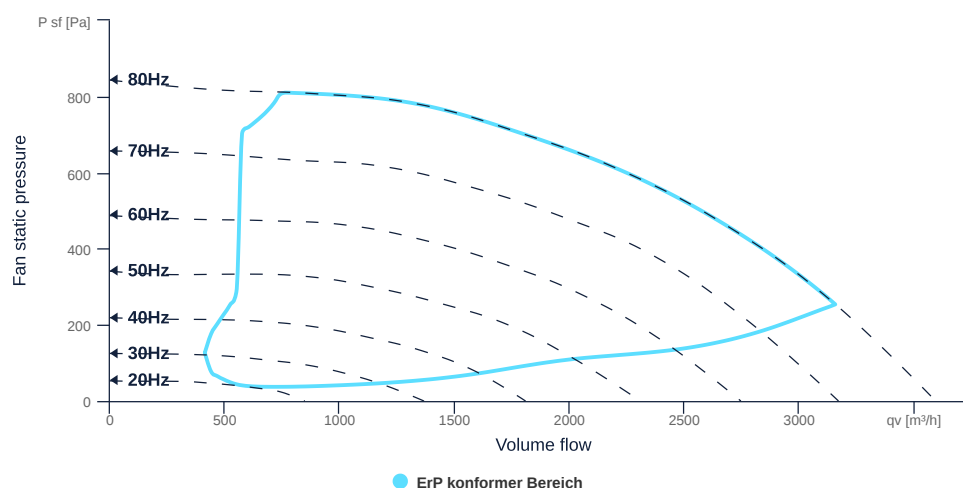

to the product detail page

MPS 315 D4 40

156627

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Coated steel		matimpeller
Weight	52.9	kg	m
Nominal air flow rate, nominal point m³/h	2005.2	CmH	q _{v,nom}
Nominal external pressure, static	473.7	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.56	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.46	kw	P _{e,nom}
Face velocity, nominal point	5.6	mps	v _{nom}
Nominal external pressure, static	473.7	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	52.7	p	η _{es,SUP}
Highest external air leakage rate	0.02	p	
Enclosure sound level, nominal point	72	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	669	w	P _{ed, max}
Max. operating current (device)	1.18	A	I _{ed, max}
Max. speed	2360	rpm	n _{max}
Max. stat. efficiency	53.5	p	η _{es}
Max. fan efficiency	56	p	η _e
Max. flowrate	3580	CmH	q _{v, max}
Max. stat pressure	840	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPS 315 D4 40

156627



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ	Δ		wiringw1
Connection (wiring 2)	Y	Y		wiringw2
Rated voltage	230	265	v	Urated, f1
Rated voltage (wiring 2)	400	460	v	Urated, f2
Rated current	2.37	2.07	A	Irated, f1
Rated current (wiring 2)	1.37	1.2	A	Irated, f2
Nominal power	550	550	w	Pa
Nominal power (wiring 2)	550	550	w	Pout, f2
Speed	1455	1762	rpm	n1
Speed (wiring 2)	1455	1762	rpm	n2
Efficiency	80.8	81.1	p	ηm, f1
Efficiency (wiring 2)	80.8	81.1	p	ηm, f2
Efficiency class	IE3	IE3		IEmotor
Min. temperature	-20	-20	°C	Tmotor, min
UL-Certification motor		None		ULcert

SMOKE EXTRACT DATA


Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass



MPS 315 D4 40

156627


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

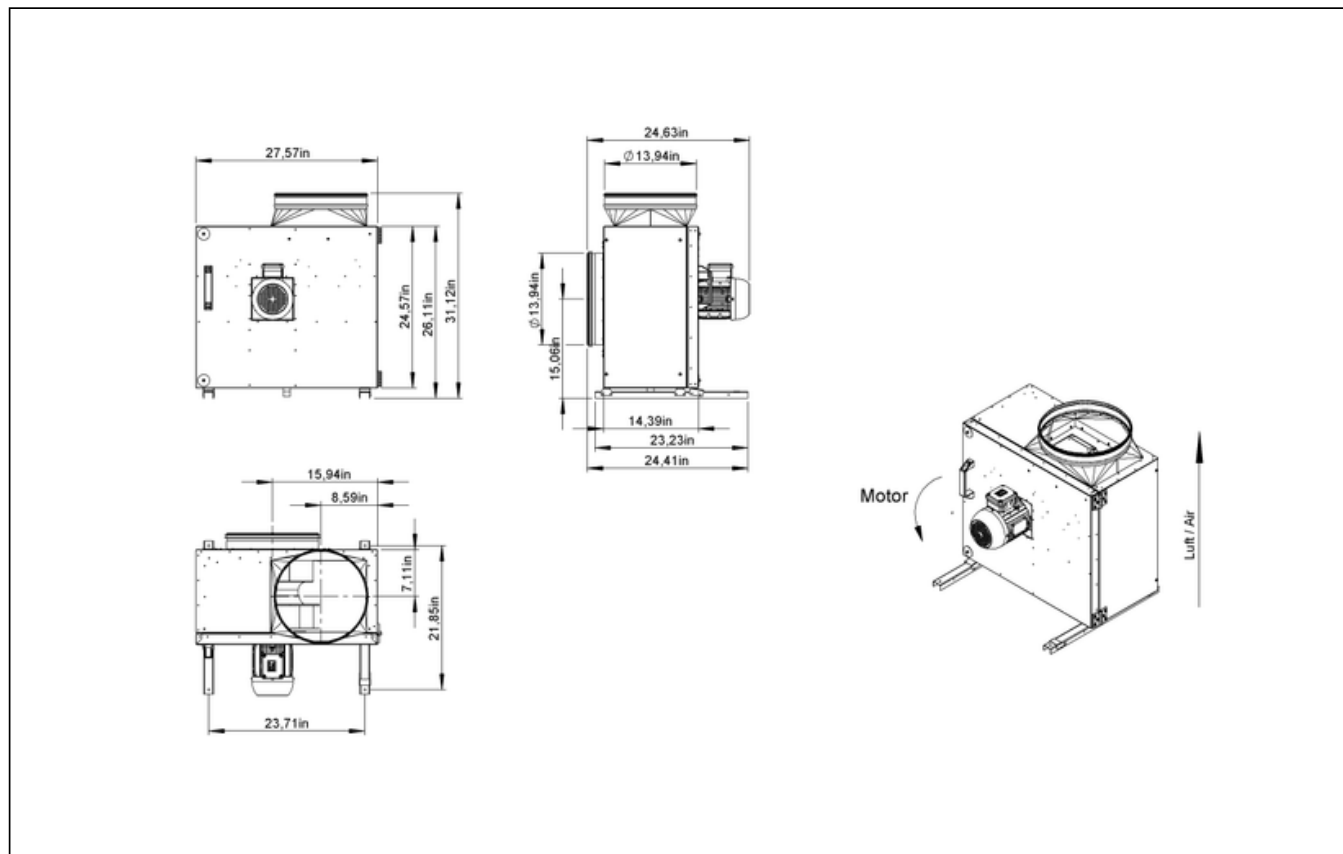

to the product detail page

MPS 315 D4 40

156627

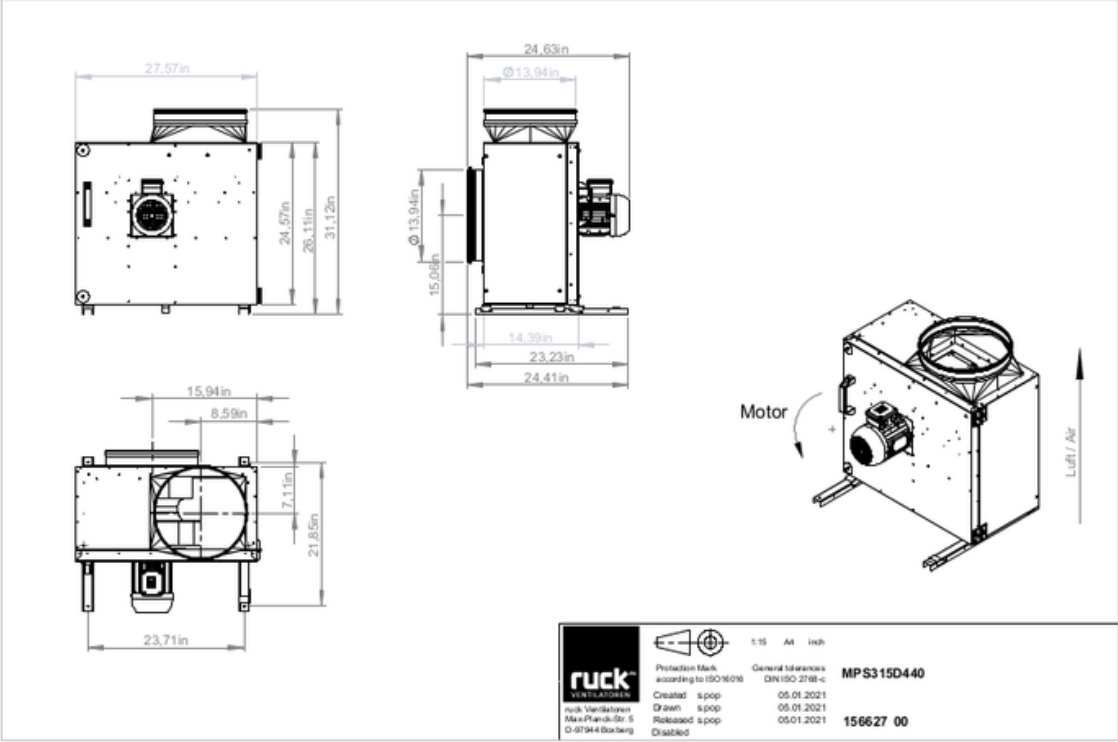





to the product detail page



MPS 315 D4 40

156627



ruck

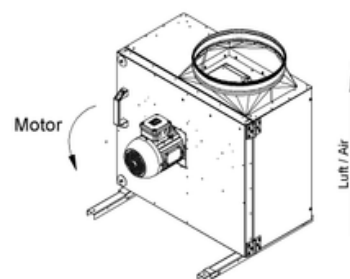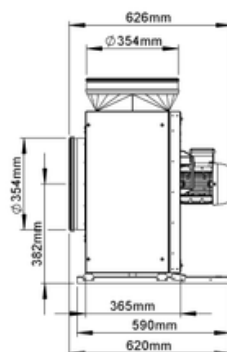

to the product detail page

MPS 315 D4 40

156627

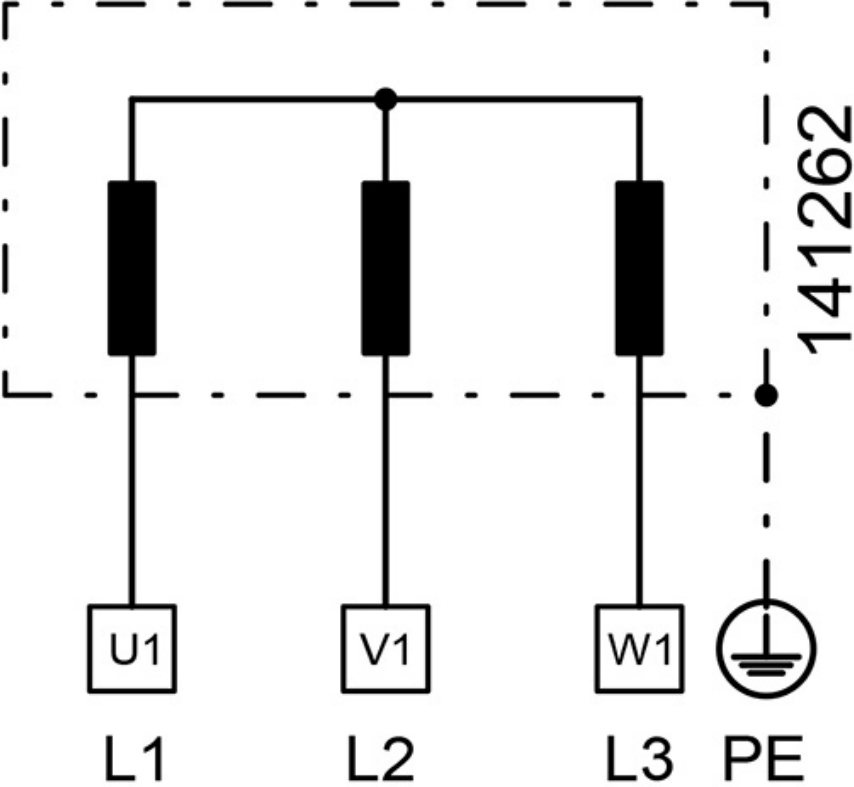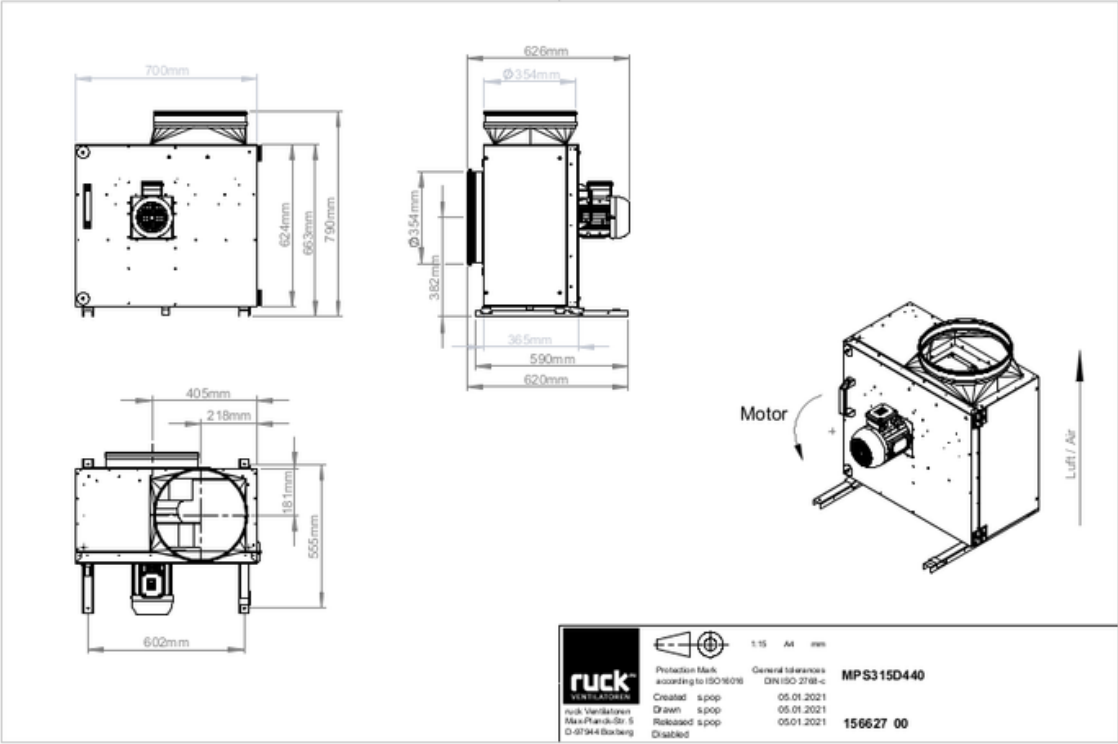

MPS 315 D4 40

156627



[to the product detail page](#)