

MPS 315 EC 30


149313

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- High efficiency EC motor outside the air flow
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

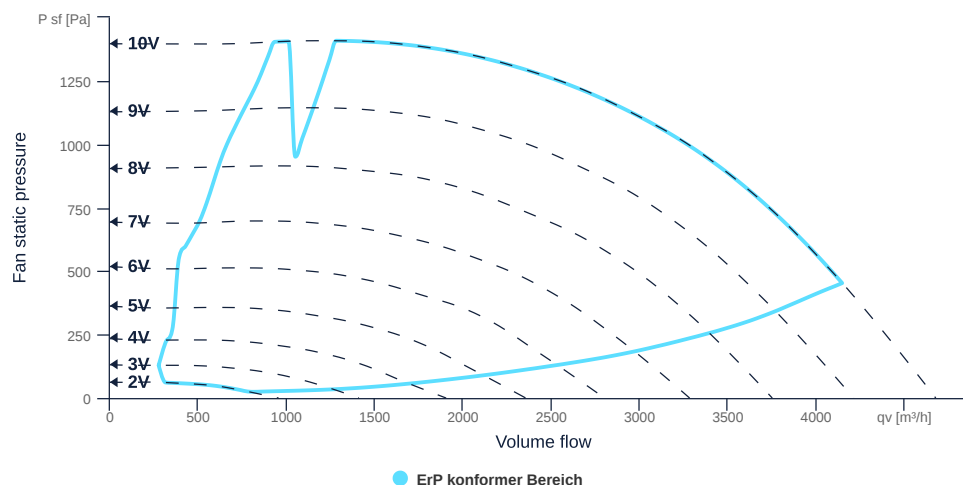

to the product detail page

MPS 315 EC 30

149313

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	16 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Coated steel		mat _{impeller}
Weight	50	kg	m
Nominal air flow rate, nominal point m³/h	2595.6	CmH	q _{v,nom}
Nominal external pressure, static	1034	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.72	CmS	q _{v,nom}
Actual electrical input power, nominal point	1.16	kw	P _{e,nom}
Face velocity, nominal point	7.3	mps	v _{nom}
Nominal external pressure, static	1034	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	66.73	p	η _{es,SUP}
Highest external air leakage rate	0.31	p	
Enclosure sound level, nominal point	77	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1470	1470	w	P _{ed, max}
Max. operating current (device)	10.7	10.7	A	I _{ed, max}
Max. speed	3100	3100	rpm	n _{max}
Max. stat. efficiency	60.4	60.4	p	η _{es}
Max. fan efficiency	62.3	62.3	p	η _e
Max. flowrate	4675	4675	CmH	q _{v, max}
Max. stat pressure	1395	1395	Pa	p _{sf, max}
Max. medium temperature	120	120	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-20	-20	°C	T _{amb, min}



to the product detail page

MPS 315 EC 30

149313



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230		v	Urated, f1
Rated current	9.5		A	Irated, f1
Nominal power	1200		w	Pa
Speed	3100		rpm	nf1
UL-Certification motor		None		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

MPS 315 EC 30

149313





CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

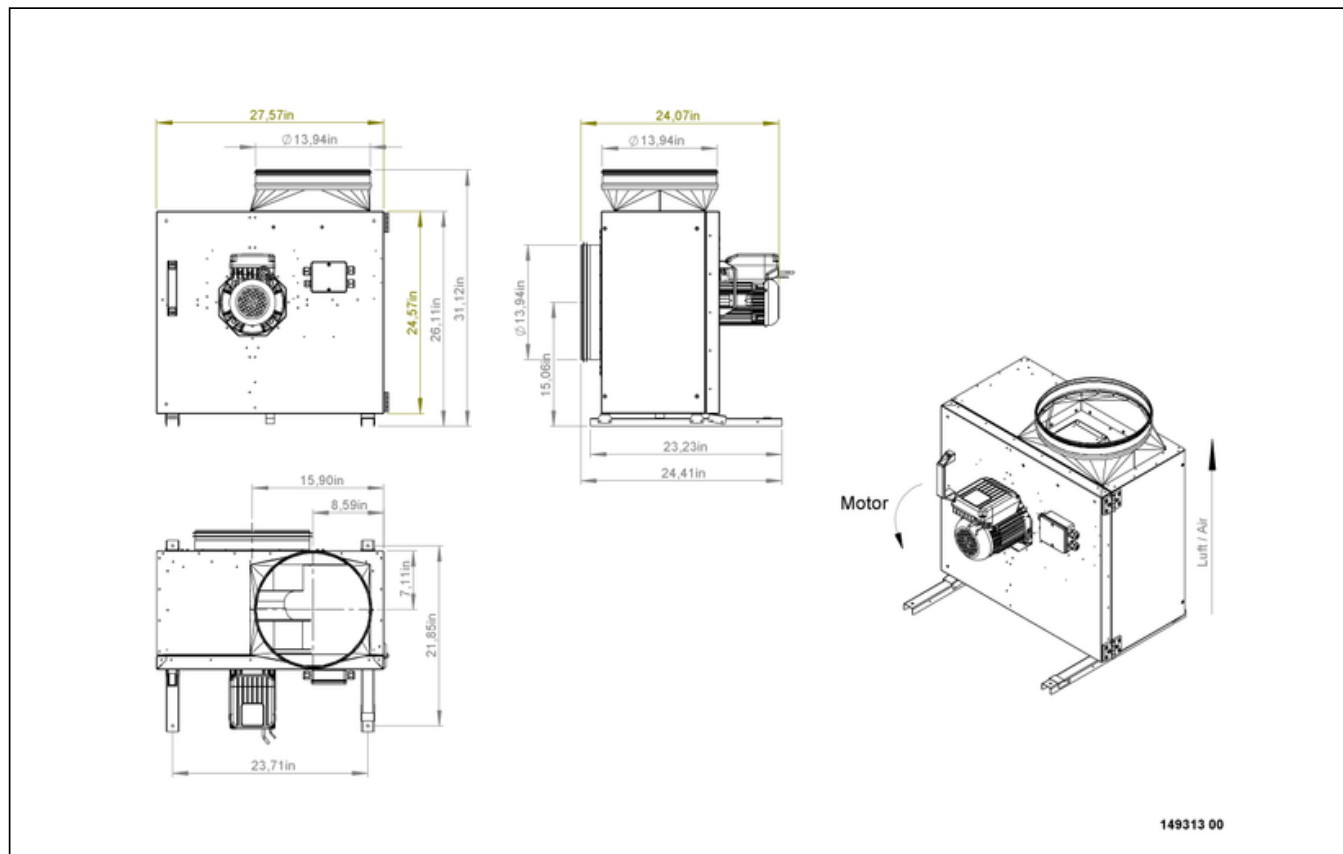

MPS 315 EC 30

149313

ruck

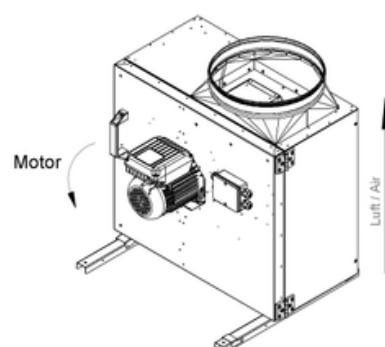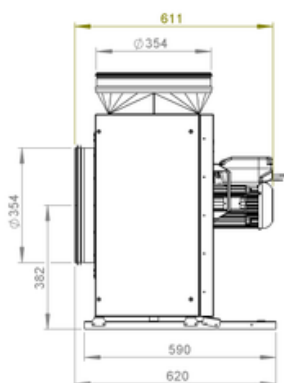


149313 00



MPS 315 EC 30

149313

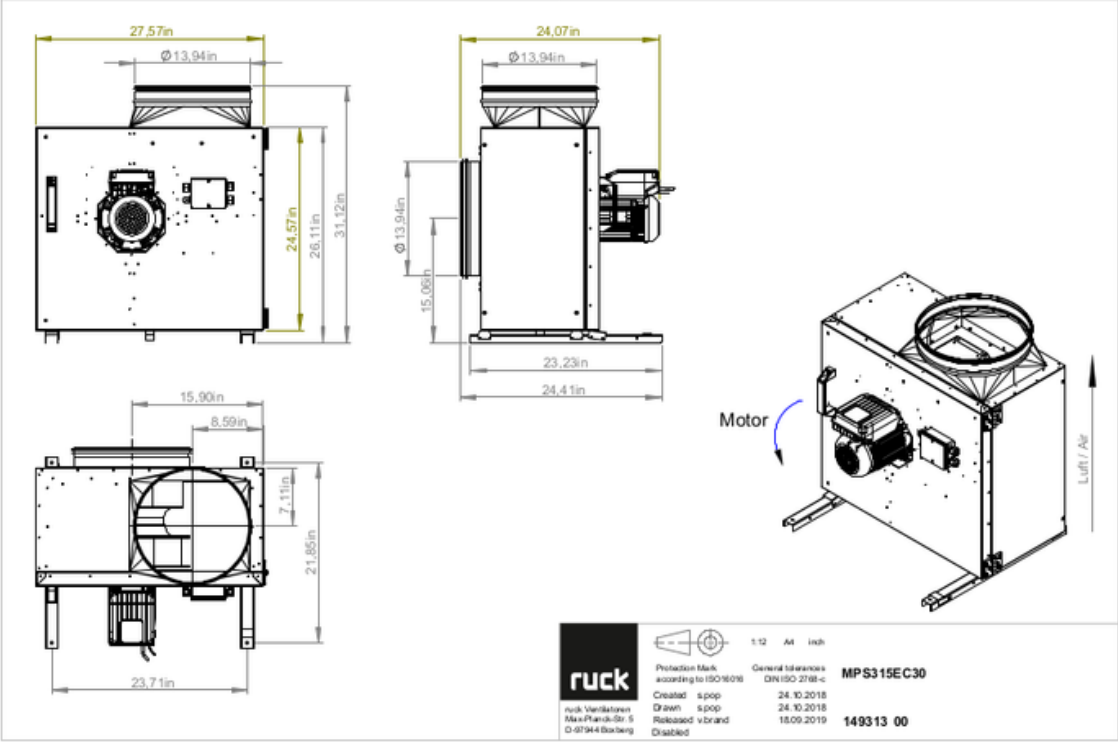


to the product detail page

MPS 315 EC 30


149313

ruck

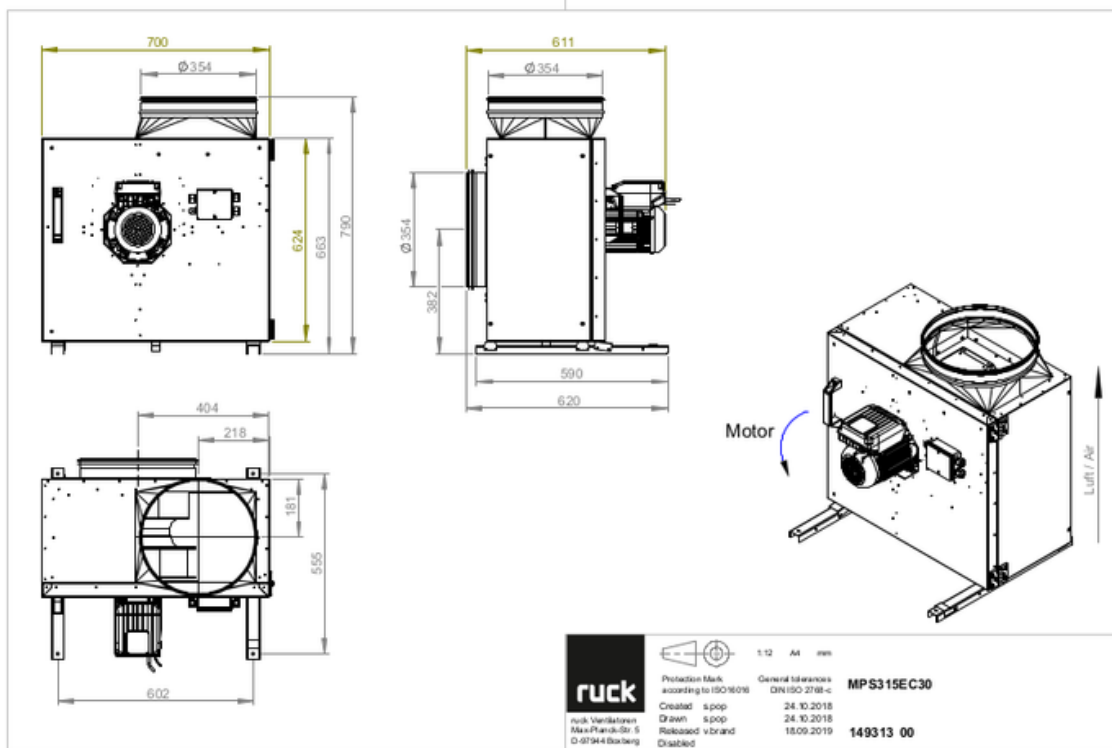

MPS 315 EC 30

149313

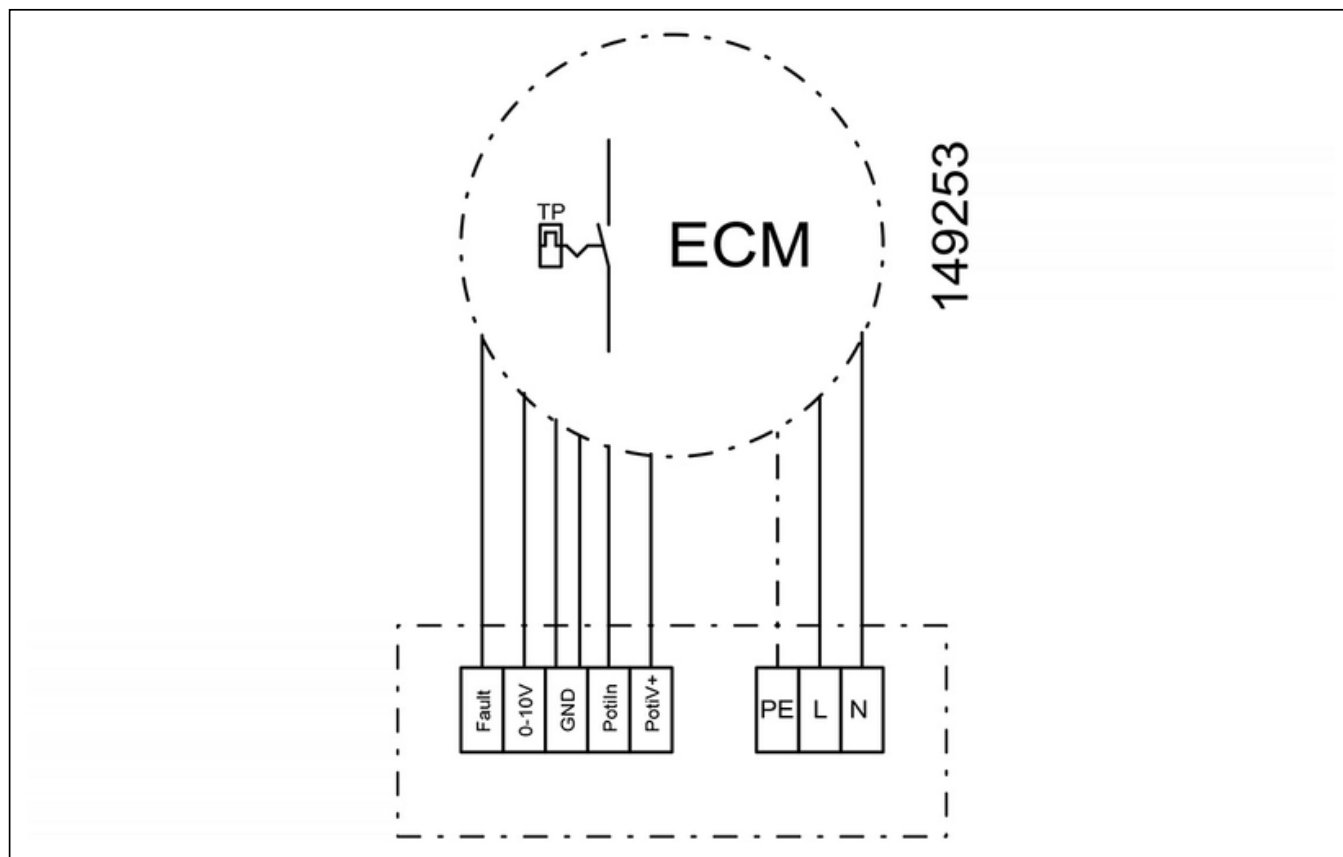

to the product detail page