

MPS 560 D4 40


156635

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

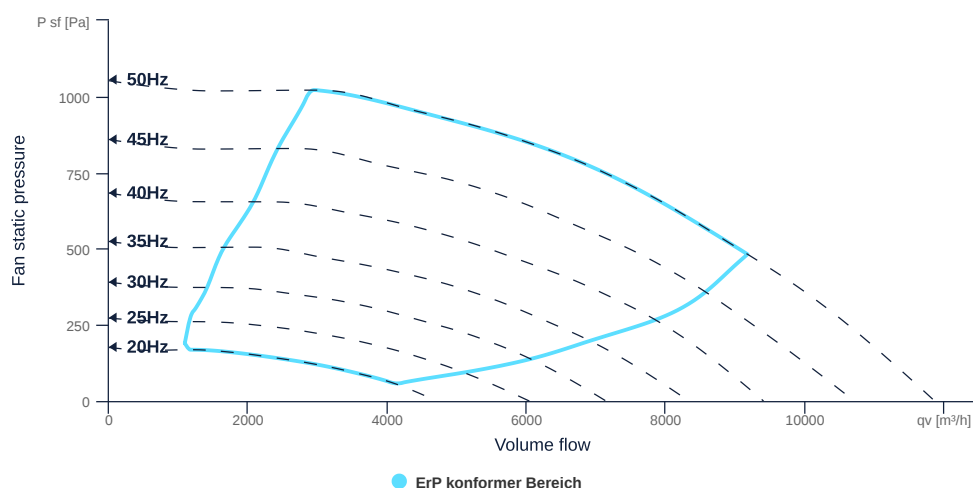

to the product detail page

MPS 560 D4 40

156635

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN500		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Coated steel		mat _{impeller}
Weight	115	kg	m
Nominal air flow rate, nominal point m³/h	6678	CmH	q _{v,nom}
Nominal external pressure, static	793.7	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.86	CmS	q _{v,nom}
Actual electrical input power, nominal point	2.5	kw	P _{e,nom}
Face velocity, nominal point	7.5	mps	v _{nom}
Nominal external pressure, static	793.7	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	63.4	p	η _{es,SUP}
Highest external air leakage rate	0.02	p	
Enclosure sound level, nominal point	80	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	2577	w	P _{ed, max}
Max. operating current (device)	4.95	A	I _{ed, max}
Max. speed	1480	rpm	n _{max}
Max. stat. efficiency	55.6	p	η _{es}
Max. fan efficiency	58.1	p	η _e
Max. flowrate	11840	CmH	q _{v, max}
Max. stat pressure	1050	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}
Min. voltage	400	v	U _{min}



to the product detail page

MPS 560 D4 40

156635

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwr _{sup} motor
Number of poles (1)		4.000000		num poles _{w1}
Connection	Δ			wiring _{w1}
Connection (wiring 2)	Y			wiring _{w2}
Rated voltage	230		v	U _{rated, f1}
Rated voltage (wiring 2)	400		v	U _{rated, f2}
Rated current	8.3		A	I _{rated, f1}
Rated current (wiring 2)	4.8		A	I _{rated, f2}
Nominal power	2200		w	P _a
Nominal power (wiring 2)	2200		w	P _{out, f2}
Speed	1447		rpm	n _{r1}
Speed (wiring 2)	1447		rpm	n _{r2}
Efficiency	86.7		p	η _{m, f1}
Efficiency (wiring 2)	86.7		p	η _{m, f2}
Efficiency class	IE3			IE _{motor}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.790000	0.000000		cos φ
UL-Certification motor		None		UL _{cert}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

MPS 560 D4 40

156635


ruck

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

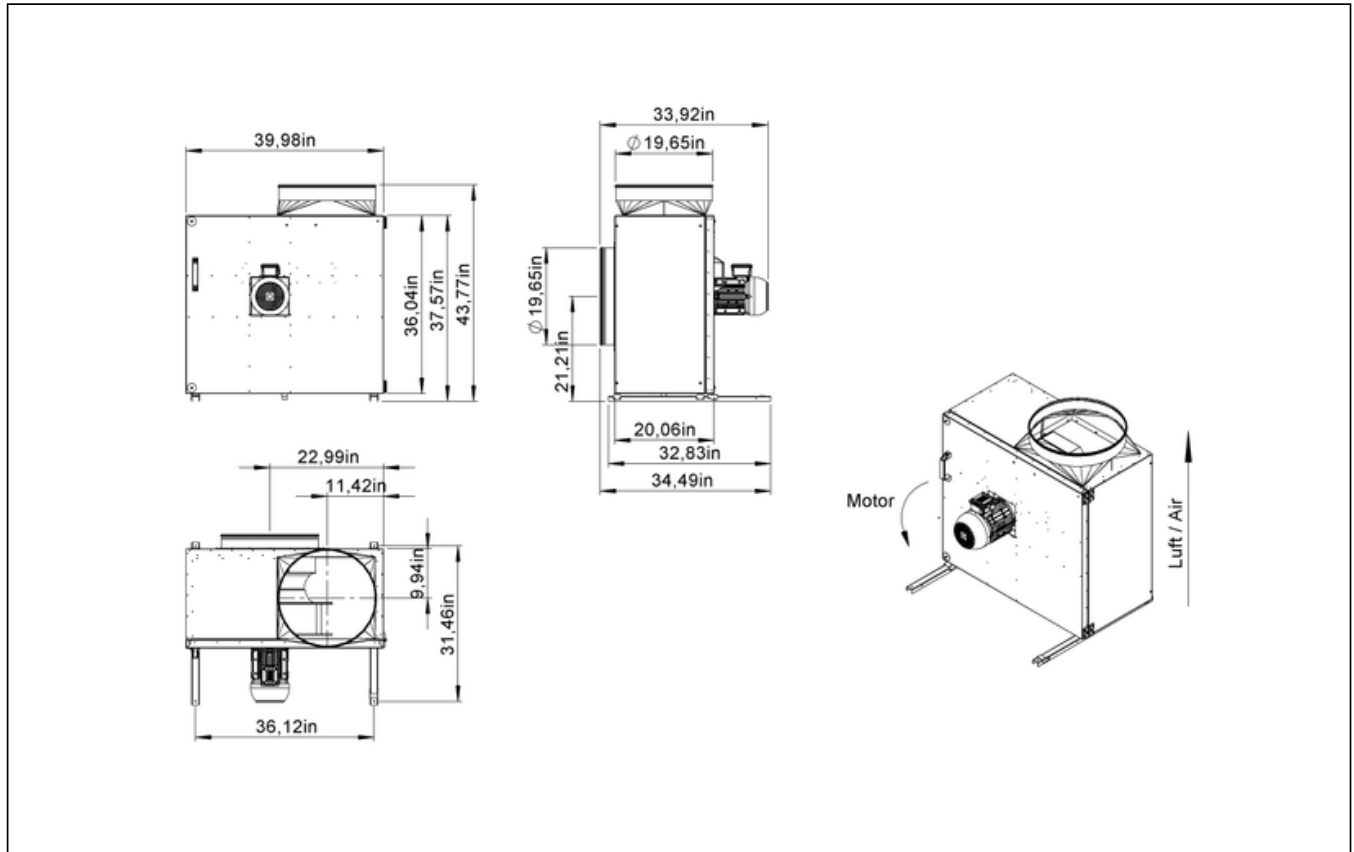

MPS 560 D4 40

156635




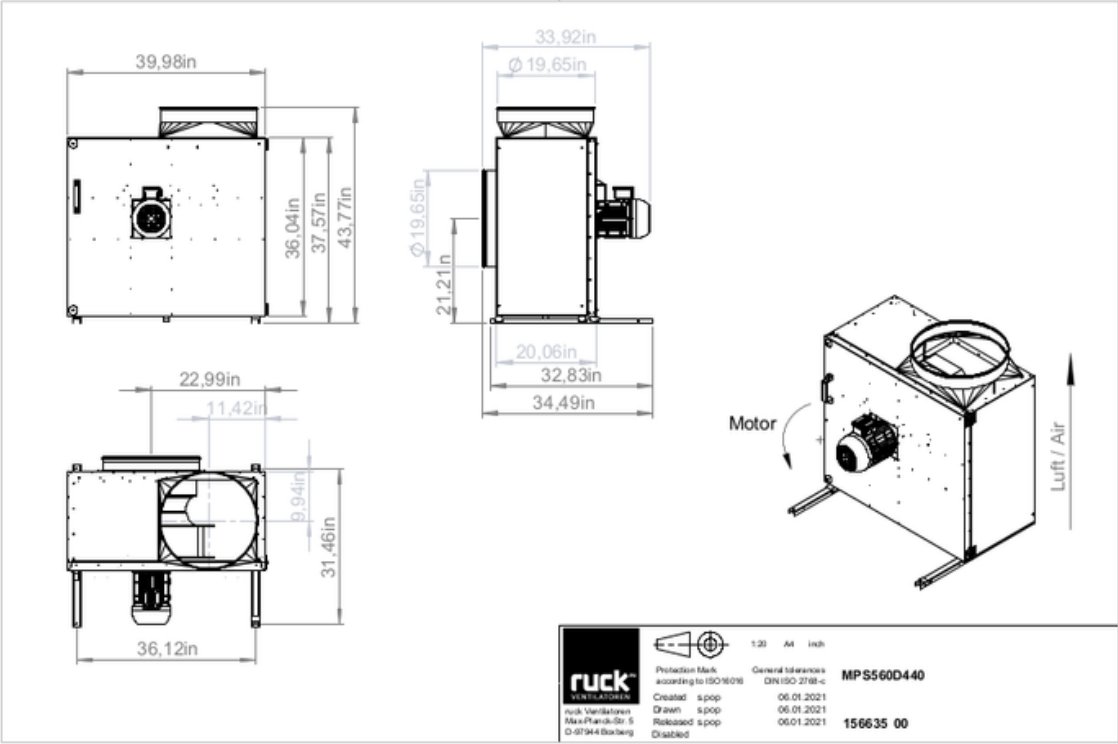


to the product detail page

MPS 560 D4 40

156635



ruck

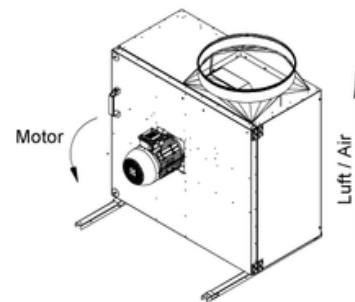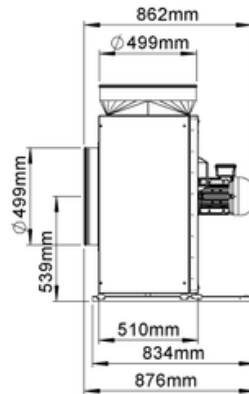

to the product detail page

MPS 560 D4 40

156635

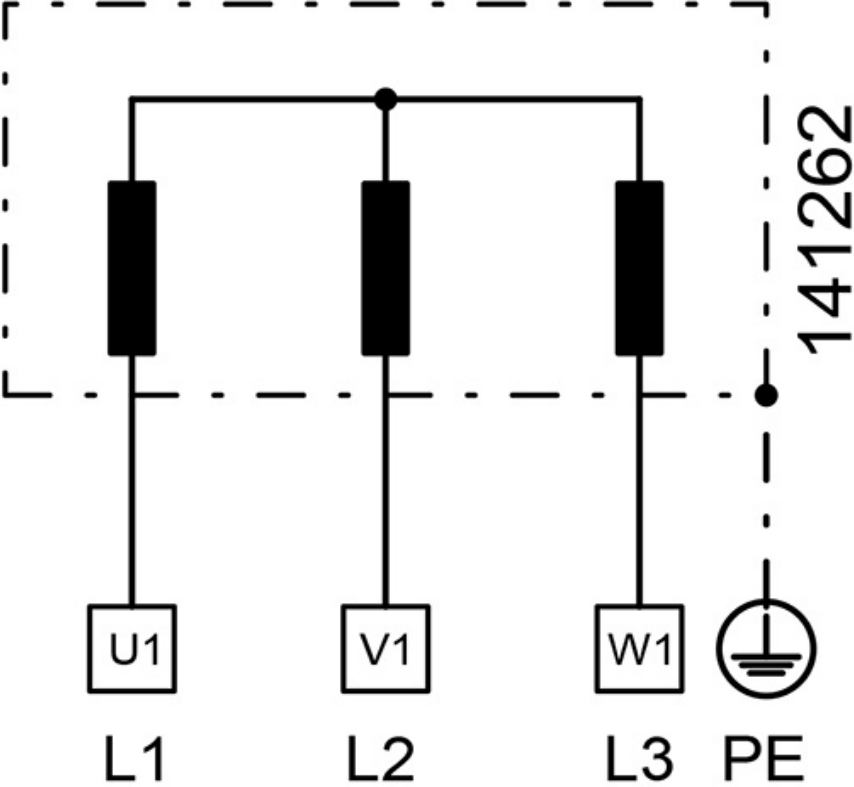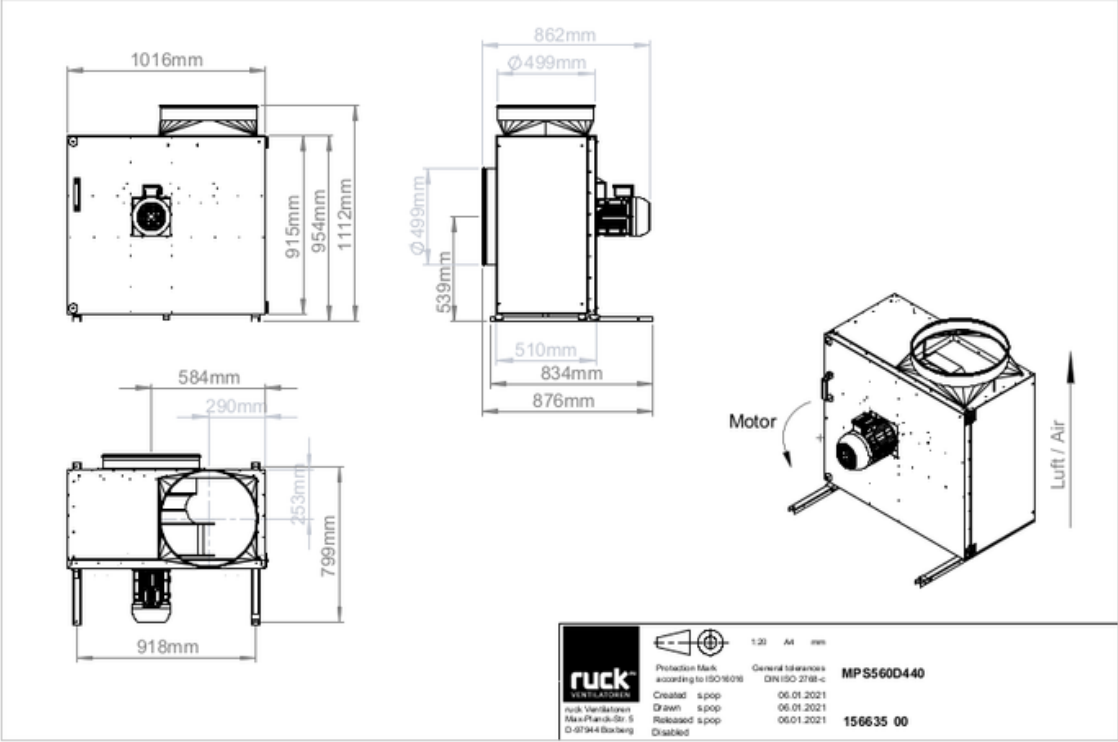

MPS 560 D4 40

156635



to the product detail page