

MPS 560 D4 F4 30


145903

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- IE3 motor outside the airflow, frequency controllable
- Smoke extract fan F400, 200 °C continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

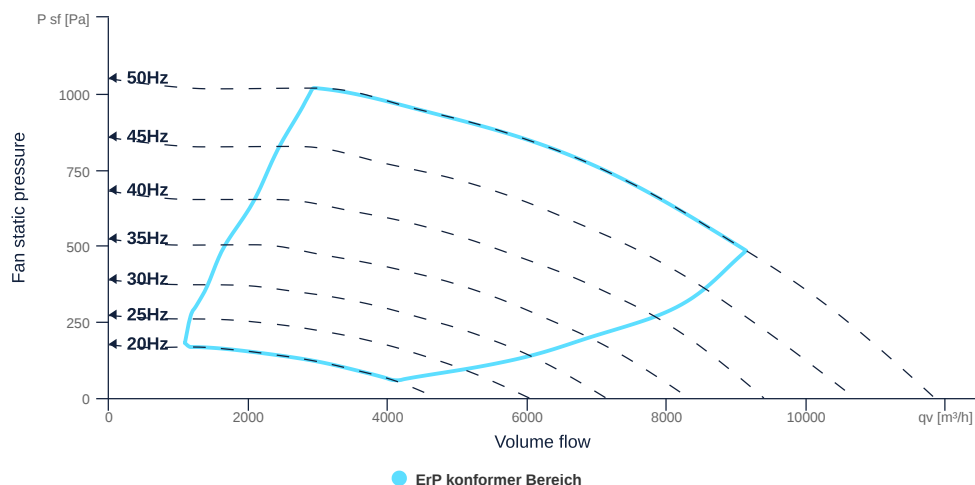

to the product detail page

MPS 560 D4 F4 30

145903

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN500		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Coated steel		matimpeller
Weight	115	kg	m
Nominal air flow rate, nominal point m³/h	8834.4	CmH	q _{v,nom}
Nominal external pressure, static	527	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	2.45	CmS	q _{v,nom}
Actual electrical input power, nominal point	2.57	kw	P _{e,nom}
Face velocity, nominal point	10	mps	v _{nom}
Nominal external pressure, static	527	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	59.7	p	η _{es,SUP}
Highest external air leakage rate	0.01	p	
Enclosure sound level, nominal point	80	db	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	2577	w	P _{ed, max}
Max. operating current (device)	4.95	A	I _{ed, max}
Max. speed	1480	rpm	n _{max}
Max. stat. efficiency	55.6	p	η _{es}
Max. fan efficiency	58.1	p	η _e
Max. flowrate	11840	CmH	q _{v, max}
Max. stat pressure	1050	Pa	p _{sf, max}
Max. medium temperature	200	°C	T _{m, max}
Max. environment temperature	50	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



MPS 560 D4 F4 30

145903

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwr _{sup} motor
Number of poles (1)		4.000000		num poles _{w1}
Connection	Δ	Y		wiring _{w1}
Connection (wiring 2)	Y			wiring _{w2}
Rated voltage	230	460	v	U _{rated, f1}
Rated voltage (wiring 2)	400		v	U _{rated, f2}
Rated current	8.03	4.01	A	I _{rated, f1}
Rated current (wiring 2)	4.62		A	I _{rated, f2}
Nominal power	2200	2200	w	P _a
Nominal power (wiring 2)	2200		w	P _{out, f2}
Speed	1435	1745	rpm	n _{r1}
Speed (wiring 2)	1435		rpm	n _{r2}
Starting current	64.3	38.1	A	I _{start, f1}
Starting current (wiring 2)	37		A	I _{start, f2}
Efficiency	87	89.5	p	η _{m, f1}
Efficiency (wiring 2)	87		p	η _{m, f2}
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
Cos Phi	0.790000	0.770000		cos φ
UL-Certification motor		UL recognized		UL _{cert}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Maximum resistance temperature	400	°C	T _{fire}
Maximum resistance time	120.000000		t _{fire}
Fire resistance class	F 400 (120)		F _{class}
Snow load class	-		SL _{class}




to the product detail page

MPS 560 D4 F4 30


145903

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

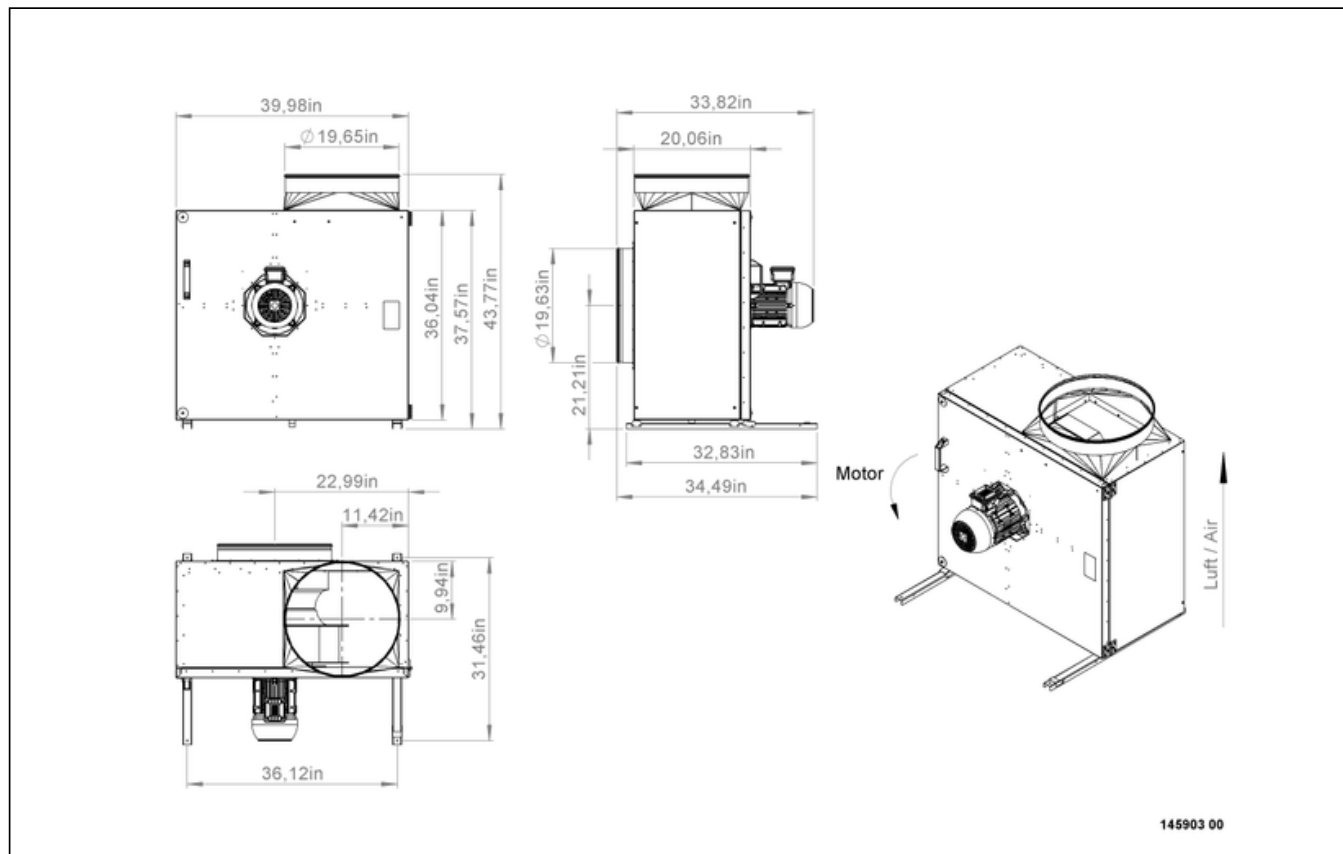

MPS 560 D4 F4 30

145903

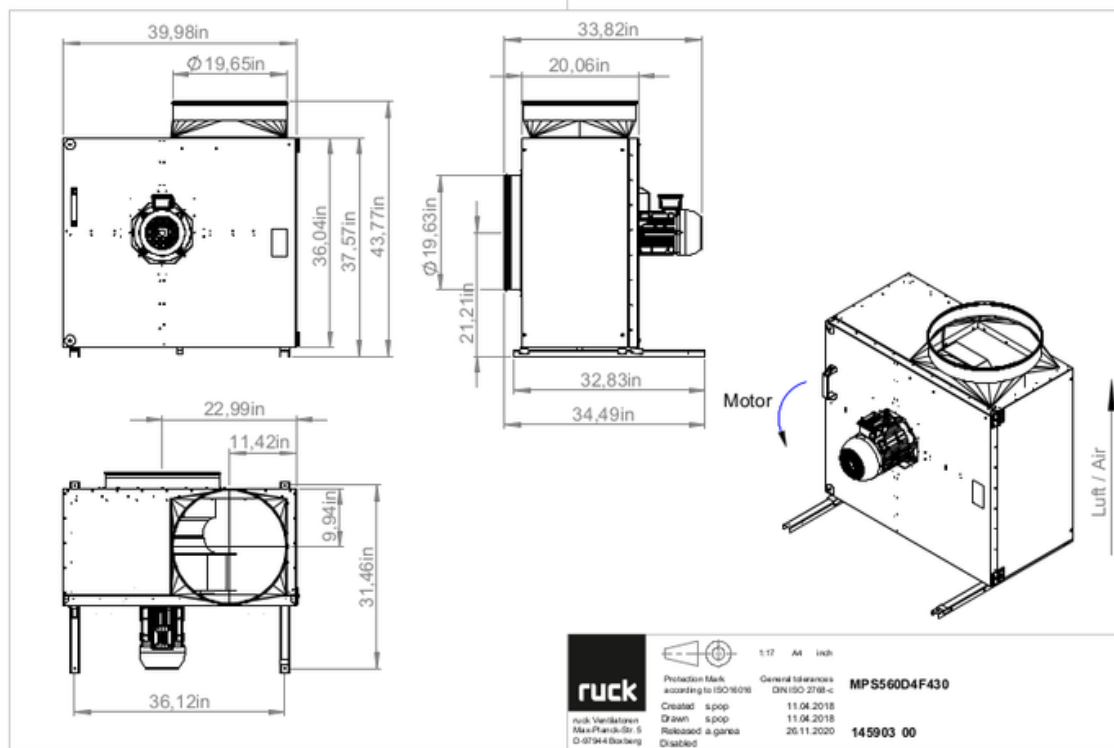


to the product detail page

MPS 560 D4 F4 30



145903

ruck

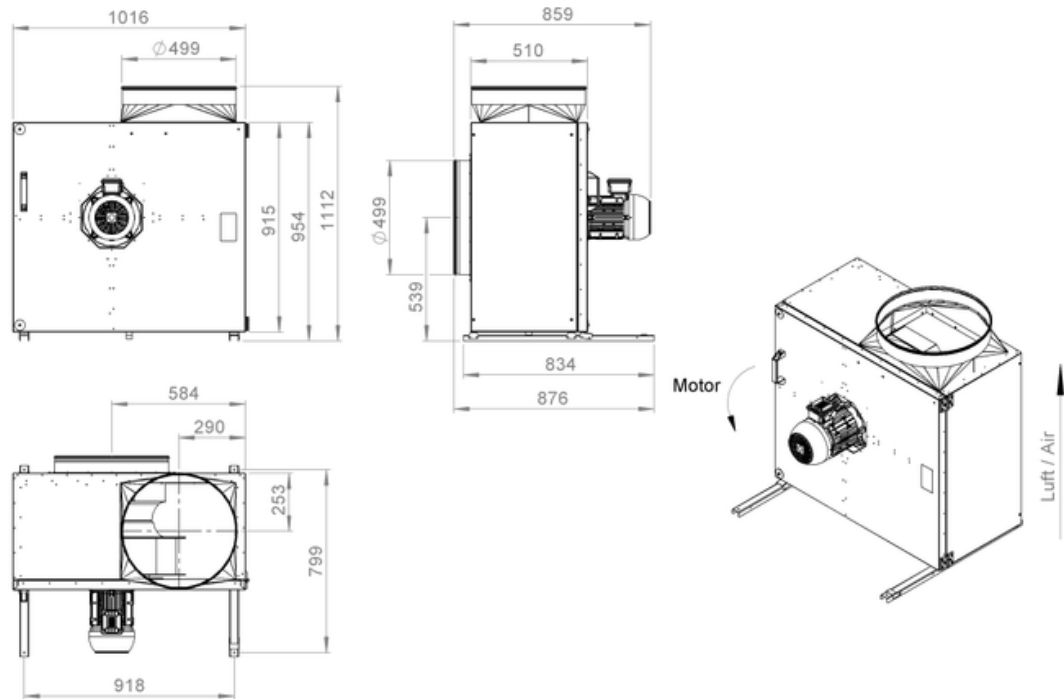

145903 00



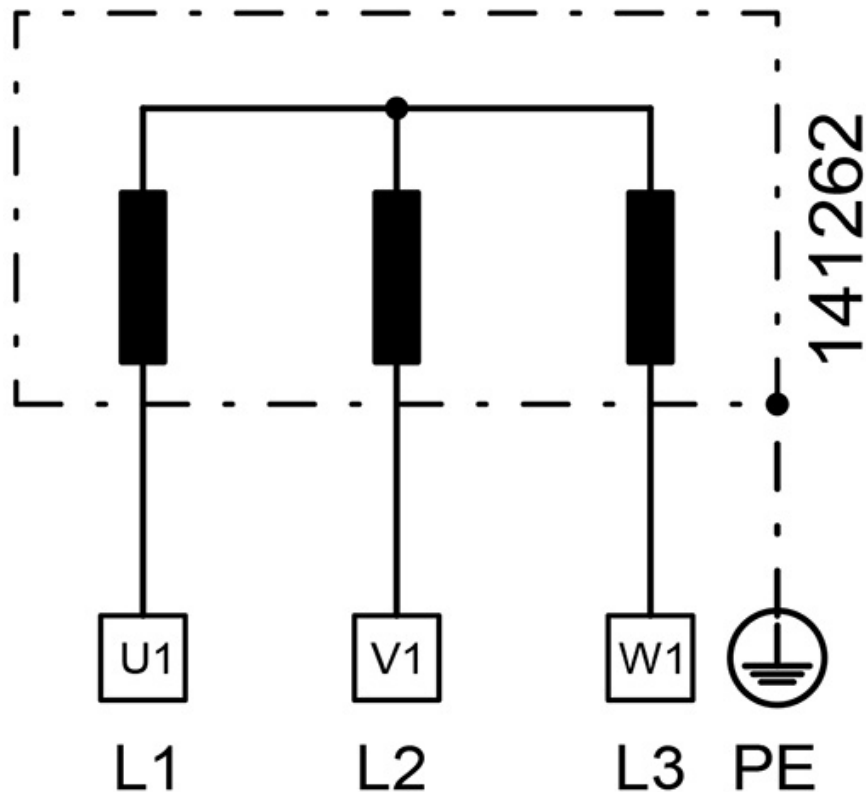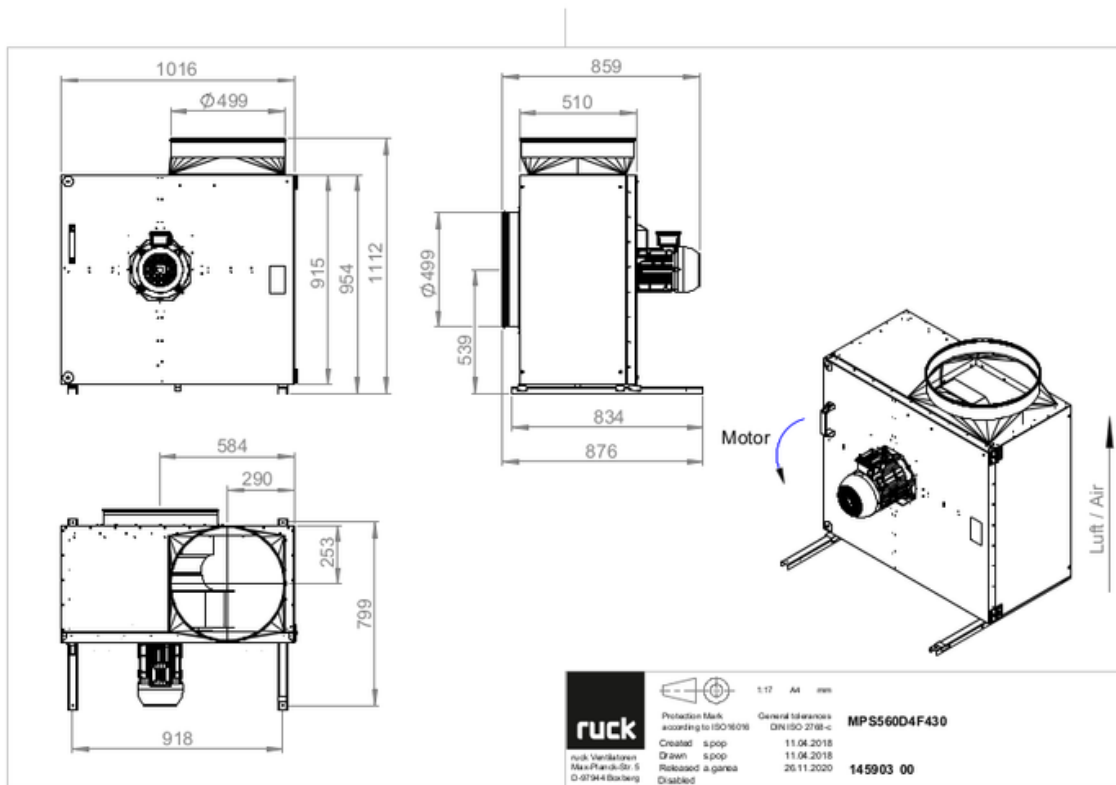

MPS 560 D4 F4 30

145903



to the product detail page