

ELKI 5025 E2 10


127744

- Energy efficient diagonal fan
- Optimally tuned and CFD-optimized aerodynamics
- Soundproof housing made of galvanized sheet steel
- Removable fan unit
- Robust single phase AC motor, voltage controllable
- Integrated thermal switch



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

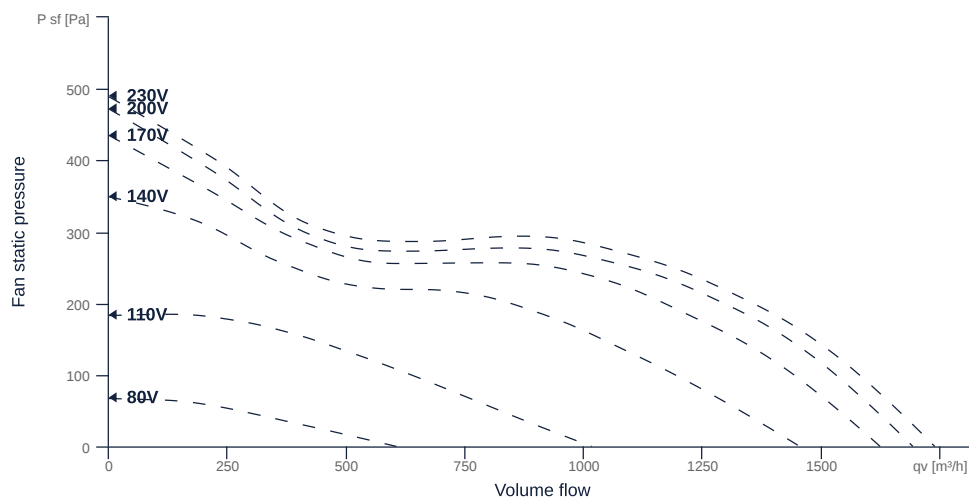

to the product detail page

ELKI 5025 E2 10

127744

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	500x250		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	13.64	kg	m
Nominal air flow rate, nominal point m³/h	1476	CmH	q _{v,nom}
Nominal external pressure, static	151	Pa	p _{s,nom}
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.41	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.18	kw	P _{e,nom}
Face velocity, nominal point	3.28	mps	V _{nom}
Nominal external pressure, static	151	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	44.1	p	η _{es,SUP}
Enclosure sound level, nominal point	57	db	LWA2
Rating	Product is compliant 2018		



ELKI 5025 E2 10

127744

ruck

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	183	w	P _{ed, max}
Max. operating current (device)	1.02	A	I _{ed, max}
Max. speed	2880	rpm	n _{max}
Max. stat. efficiency	43.6	p	η _{es}
Max. fan efficiency	44.1	p	η _e
Max. flowrate	1740	CmH	q _{v, max}
Max. stat pressure	490	Pa	p _{sf, max}
Max. medium temperature	55	°C	T _{m, max}
Max. environment temperature	55	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	v	U _{min}

MOTOR DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISO _{class}
Motor-protection		TMI		protect _{motor}
Protection class		IP00		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 1~		pwr _{sup} _{motor}
Capacity capacitor		6	μF	C _{cond}
Voltage capacitor		400	v	VU _{cond}
Number of poles (1)		2.000000		num poles _{w1}
Rated voltage	230		v	U _{rated, f1}
Rated current	0.9		A	I _{rated, f1}
Speed	2750		rpm	n _{f1}
UL-Certification motor		None		UL _{cert}



ELKI 5025 E2 10

127744

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

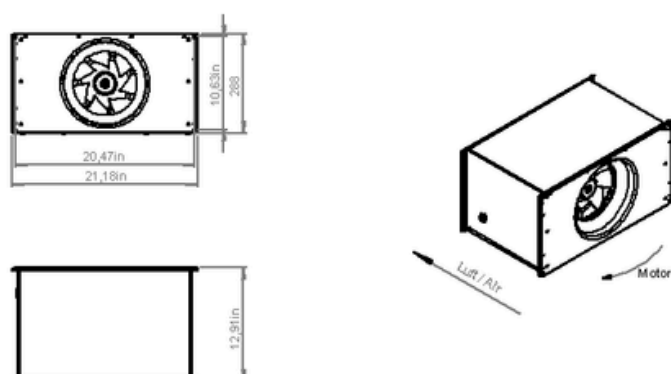



127744g 1



to the product detail page

ELKI 5025 E2 10

127744



1277448 1




to the product detail page

ELKI 5025 E2 10

127744


ruck

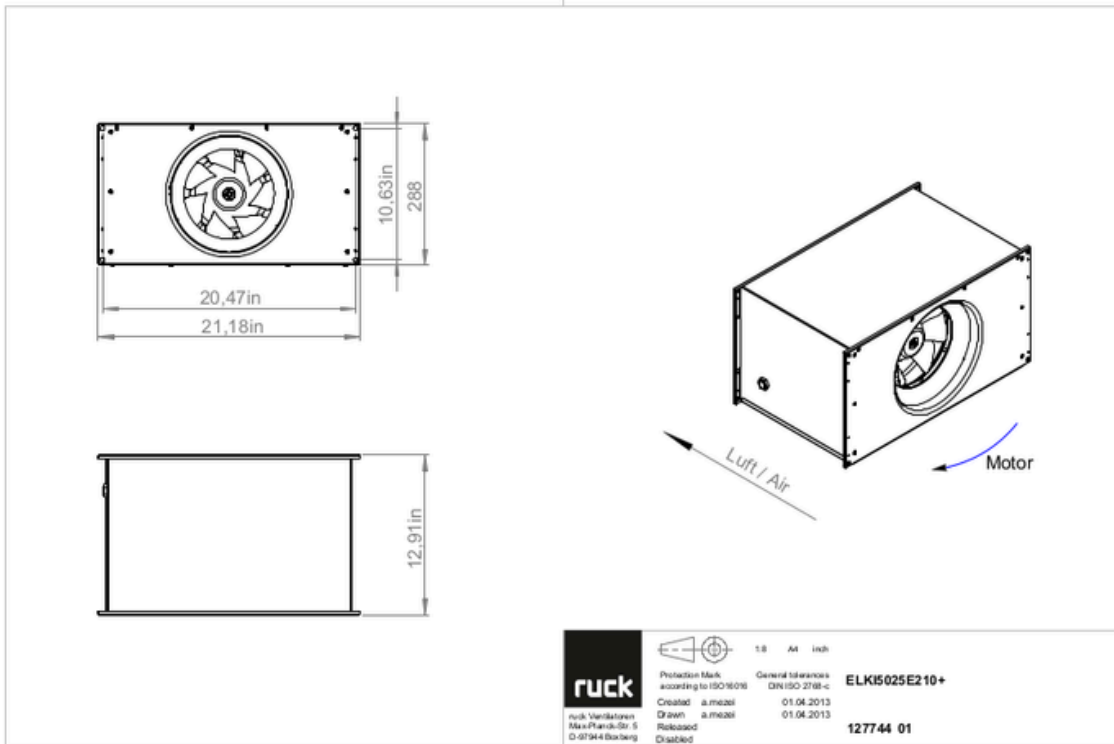


ELKI 5025 E2 10

127744

ruck

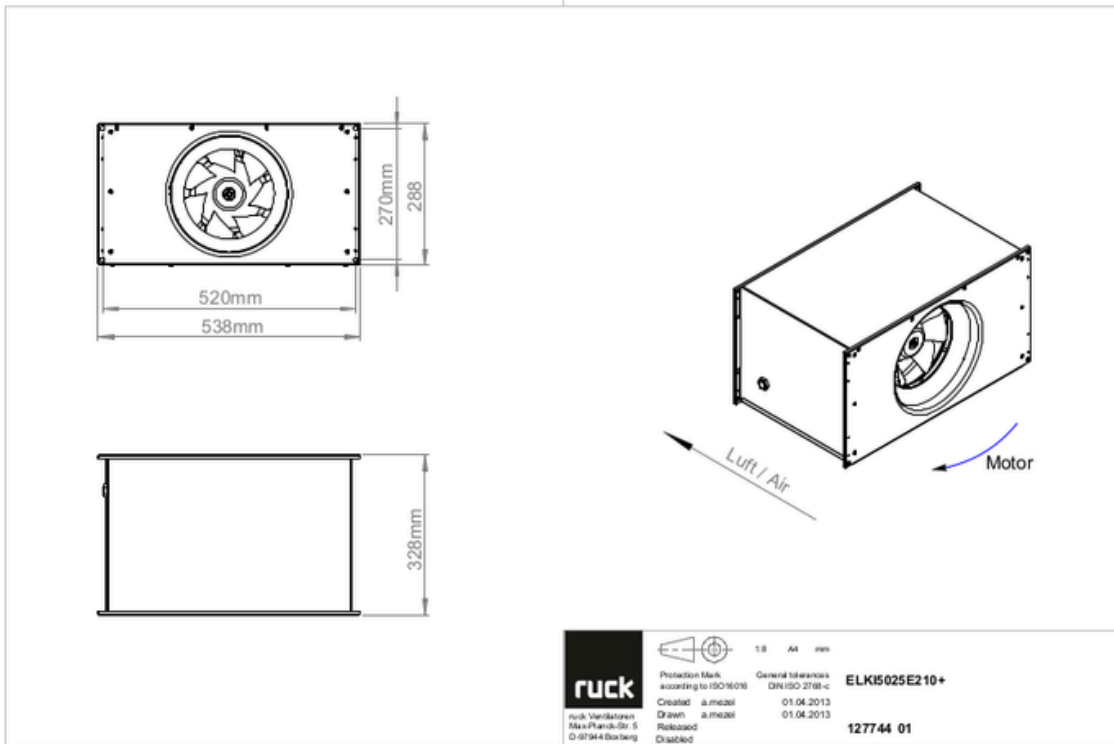

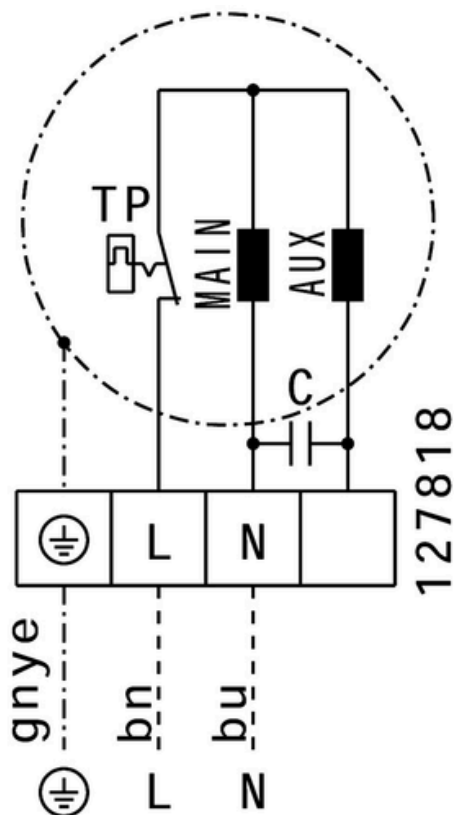


MECHANICAL ACCESSORIES

VS 5025 | 102804



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

SDE 5025 L01 | 127747



- Duct silencer
- Sendzimir galvanized sheet steel housing
- Sound absorption by mineral wool with fleece covering on air side
- 20 mm flange profiles

VKK 5025 | 169681



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C



ELKI 5025 E2 10

127744

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- Umax = 400 V, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- Imax = 25 A

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz

TES 0145 | 169581



- Step transformer
- 230 V ~, 50/60 Hz



to the product detail page