

ELKI 6035 E2 11


127734

- Energy efficient diagonal fan
- Optimally tuned and CFD-optimized aerodynamics
- Soundproof housing made of galvanized sheet steel
- Removable fan unit
- Robust single phase AC motor, voltage controllable
- Integrated thermal switch



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

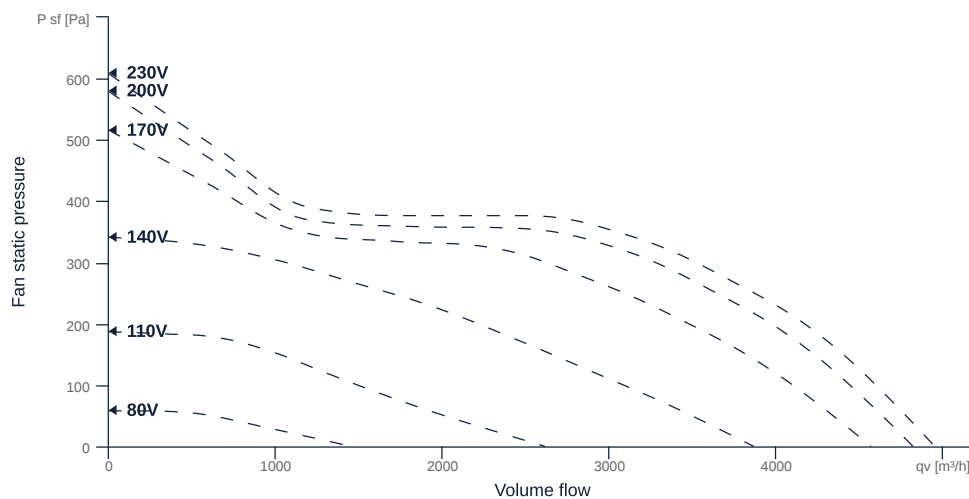

to the product detail page

ELKI 6035 E2 11

127734

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	600x350		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	26.4	kg	m
Nominal air flow rate, nominal point m³/h	4132.8	CmH	q _{v,nom}
Nominal external pressure, static	202	Pa	p _{s,nom}
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.15	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.56	kw	P _{e,nom}
Face velocity, nominal point	5.46	mps	V _{nom}
Nominal external pressure, static	202	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	50.5	p	η _{es,SUP}
Enclosure sound level, nominal point	67	db	LWA2
Rating	Product is compliant 2018		



ELKI 6035 E2 11

127734

ruck

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	562	w	P _{ed, max}
Max. operating current (device)	3.32	A	I _{ed, max}
Max. speed	2870	rpm	n _{max}
Max. stat. efficiency	50.3	p	η _{es}
Max. fan efficiency	51.7	p	η _e
Max. flowrate	4940	CmH	q _{v, max}
Max. stat pressure	610	Pa	p _{sf, max}
Max. medium temperature	55	°C	T _{m, max}
Max. environment temperature	55	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	v	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISO _{class}
Motor-protection		TMI		protect _{motor}
Protection class		IP00		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Capacity capacitor		8	μF	C _{cond}
Voltage capacitor		450	v	V _{Ucond}
Number of poles (1)		2.000000		num poles _{w1}
Rated voltage	230		v	U _{rated, f1}
Nominal power	220		w	P _a
Efficiency	71.7		p	η _{m, f1}
Efficiency class	IE3			IE _{motor}
Min. temperature	-25		°C	T _{motor, min}
UL-Certification motor		None		UL _{cert}




ELKI 6035 E2 11

127734

ruck

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

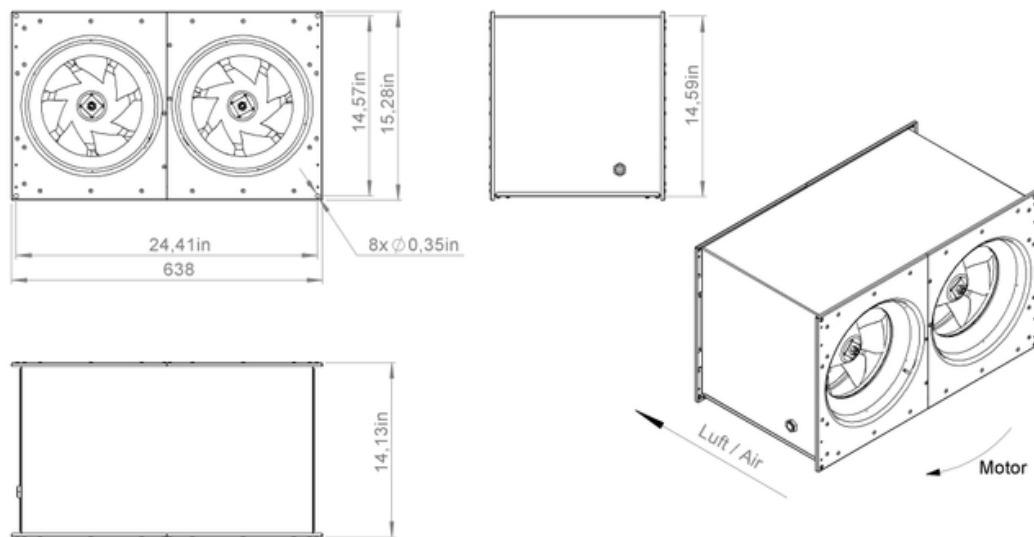


127734 00



ELKI 6035 E2 11

127734

ruck

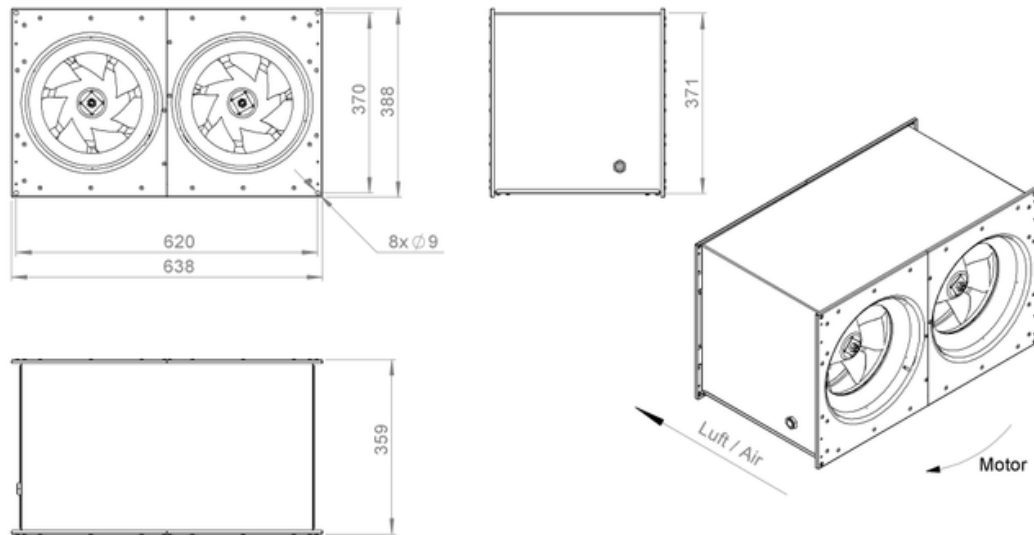

127734 00




to the product detail page

ELKI 6035 E2 11



127734

ruck

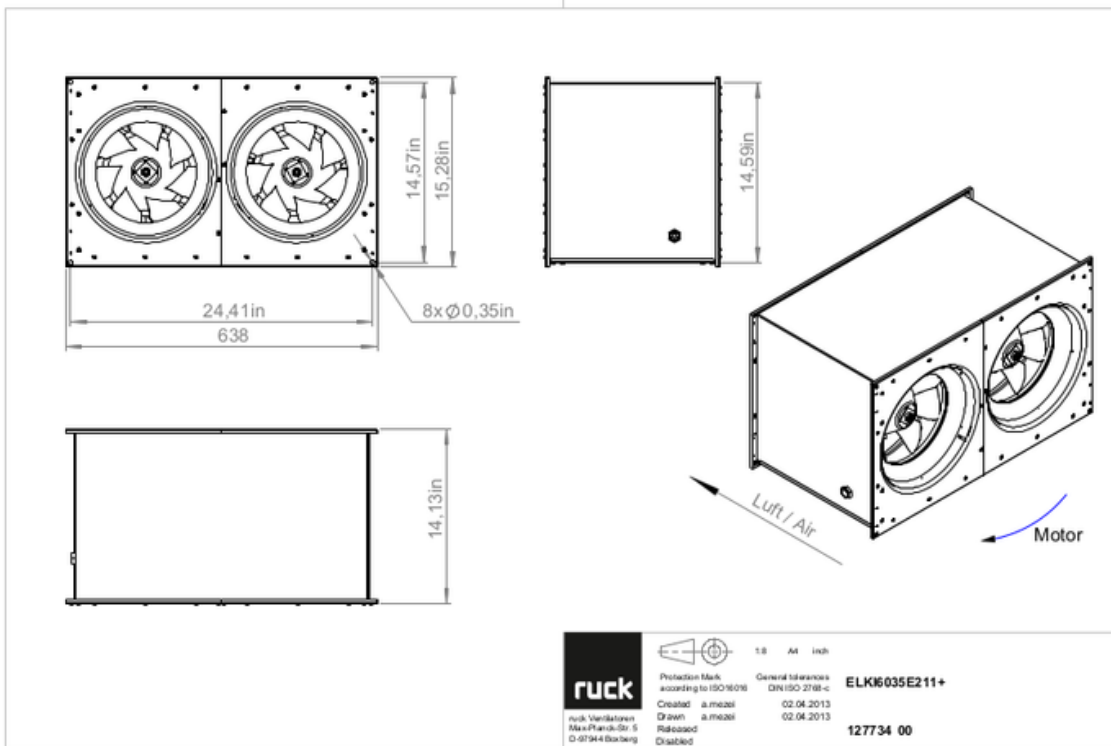

ELKI 6035 E2 11

127734

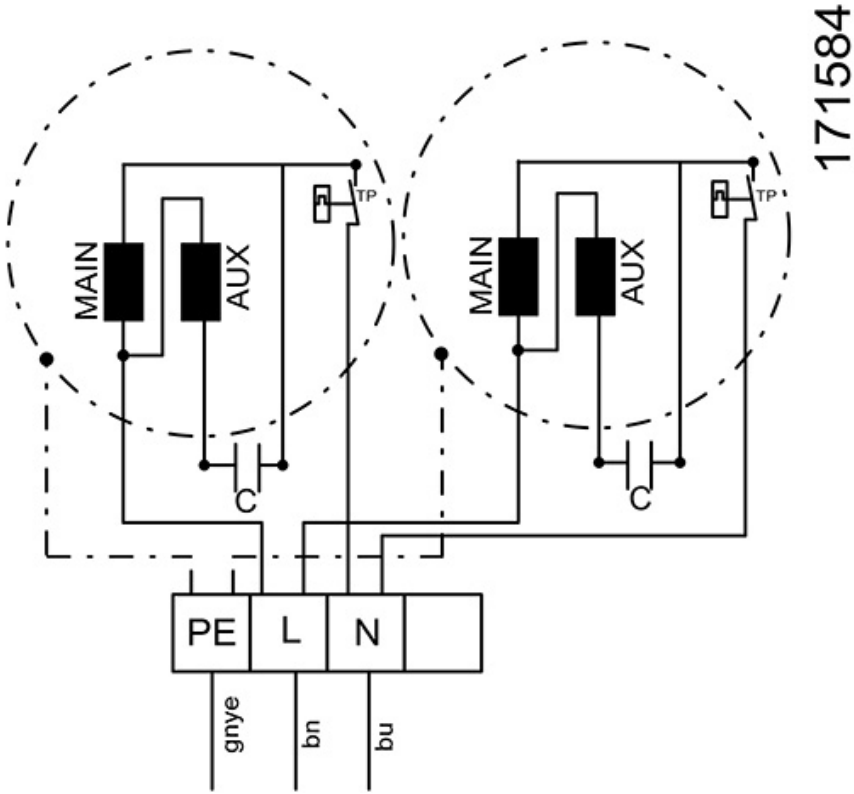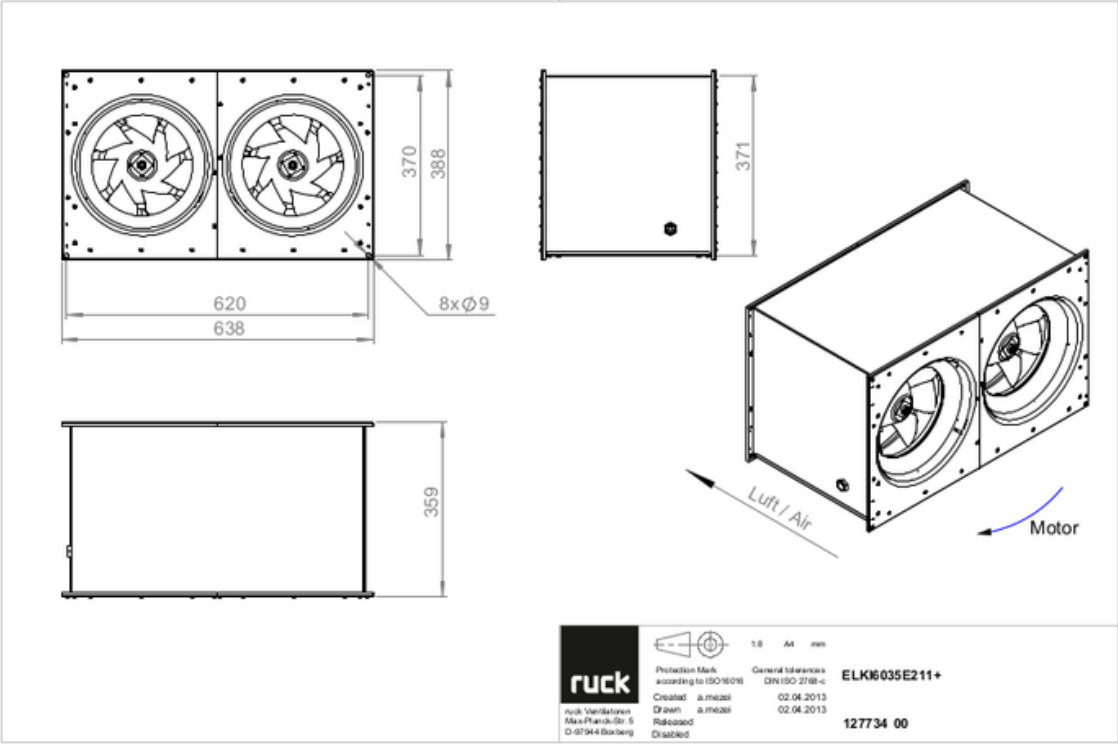

to the product detail page


MECHANICAL ACCESSORIES

VS 6035 | 102808



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

SDE 6035 L02 | 127751



- Duct silencer
- Sendzimir galvanized sheet steel housing
- Sound absorption by mineral wool with fleece covering on air side
- 20 mm flange profiles

VKK 6035 | 169684



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- U_{max} = 400 V, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- I_{max} = 25 A

TEM 035 | 103502



- 5-step transformer
- 230 V, 50/60 Hz, 3.5 A
- Output voltage: 230-190-170-140-110-80-0 V
- Protection class IP 54

TEM 035V | 136273



- 5-step transformer
- 230 V ~, 50/60 Hz

TES 035 02 | 146195



- 5-step transformer
- 230 V, 50/60 Hz, 3.5 A
- Without housing, control cabinet installation
- Protection class IP 20

