


ISORX 125 ECK 01


165270

- Soundproof centrifugal fan with backward curved impeller
- Galvanized sheet steel housing
- Swing-out fan unit
- EC motor, external rotor, steplessly controllable
- Internal electronic temperature monitoring
- Suitable for outdoor installation

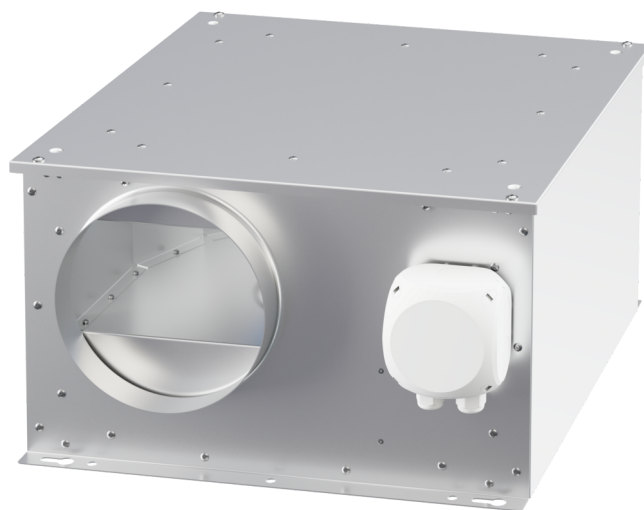

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

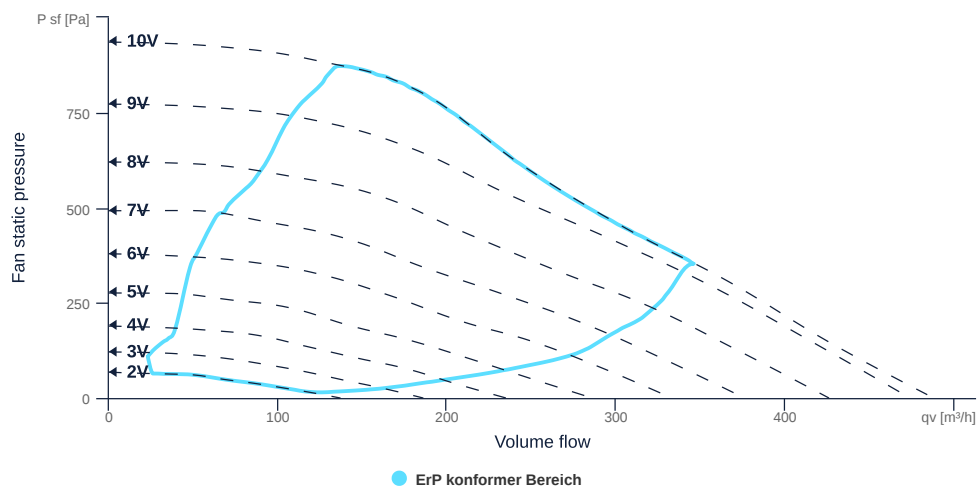

to the product detail page

ISORX 125 ECK 01

165270

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN125		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IP54		IPcompl
IP-Protection class (terminal box)	IP66		IPebox
Weight	11	kg	m
Nominal air flow rate, nominal point m³/h	230.4	CmH	q _{v,nom}
Nominal external pressure, static	680.1	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.06	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.12	kw	P _{e,nom}
Face velocity, nominal point	5.2	mps	V _{nom}
Nominal external pressure, static	680.1	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	49.7	p	η _{es,SUP}
Highest external air leakage rate	0.66	p	
Enclosure sound level, nominal point	63	db	LWA2
Rating	Product is compliant 2018		



ISORX 125 ECK 01

165270

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	119	119	w	P _{ed, max}
Max. operating current (device)	1.03	1.03	A	I _{ed, max}
Max. speed	4000	4000	rpm	n _{max}
Max. stat. efficiency	35	35	p	η _{es}
Max. fan efficiency	35.7	35.7	p	η _e
Max. flowrate	490	490	CmH	Q _{v, max}
Max. stat pressure	935	935	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}


MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230	230	v	U _{rated, f1}
Rated current	0.89	0.89	A	I _{rated, f1}
Speed	3960	3960	rpm	n _{f1}
Efficiency	46.8	46.8	p	η _{m, f1}
Min. temperature	-30	-30	°C	T _{motor, min}
Cos Phi	0.560000	0.560000		cos φ
UL-Certification motor		None		UL _{cert}




to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

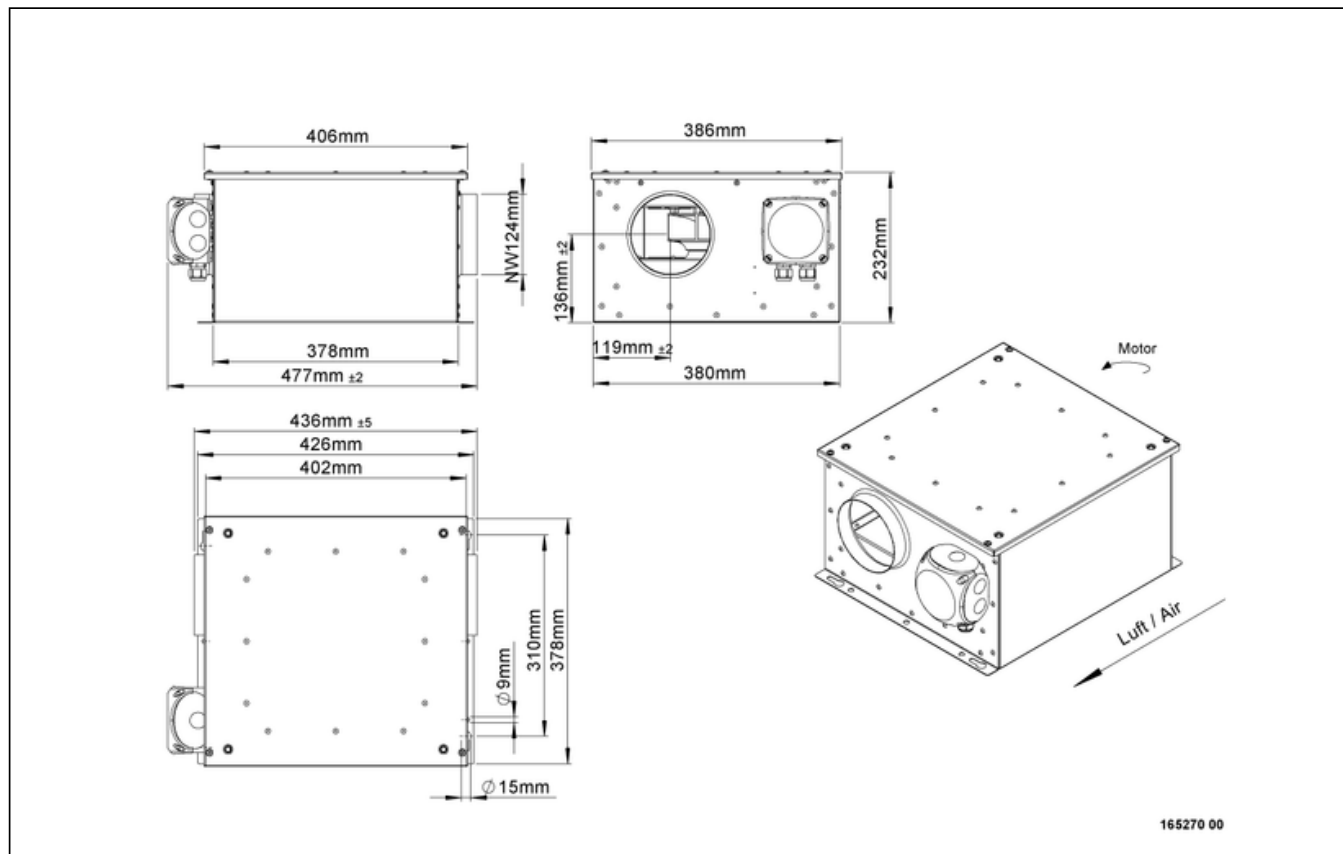

ISORX 125 ECK 01

165270

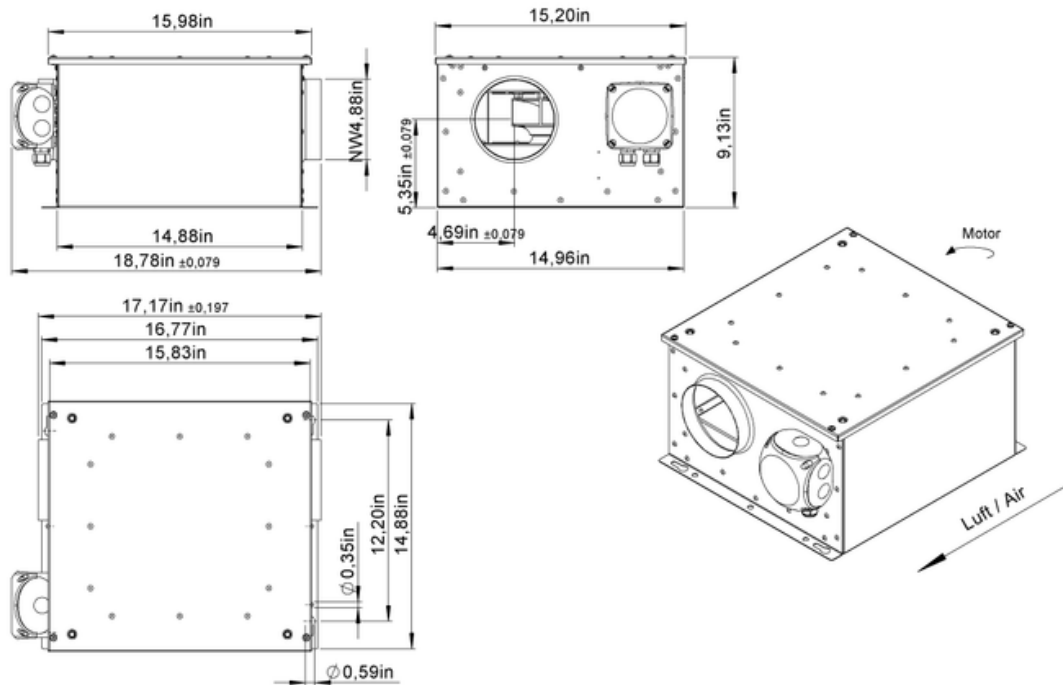

165270 00




to the product detail page


ISORX 125 ECK 01

165270

ruck

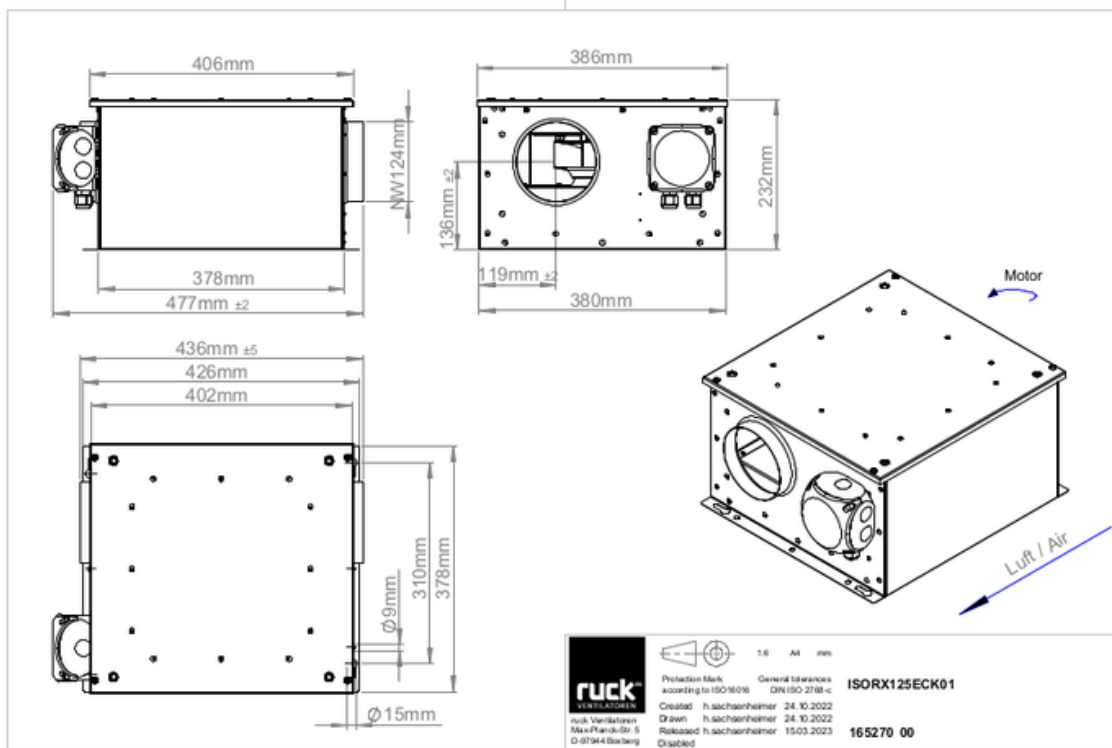


to the product detail page

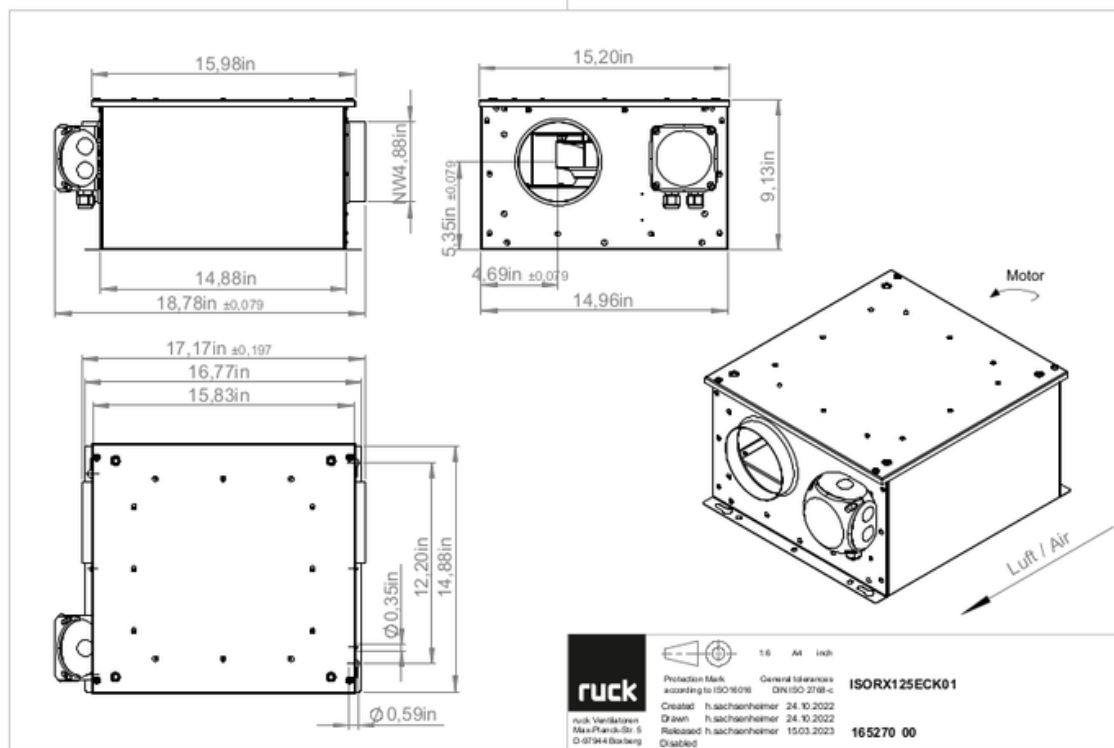

ISORX 125 ECK 01

165270

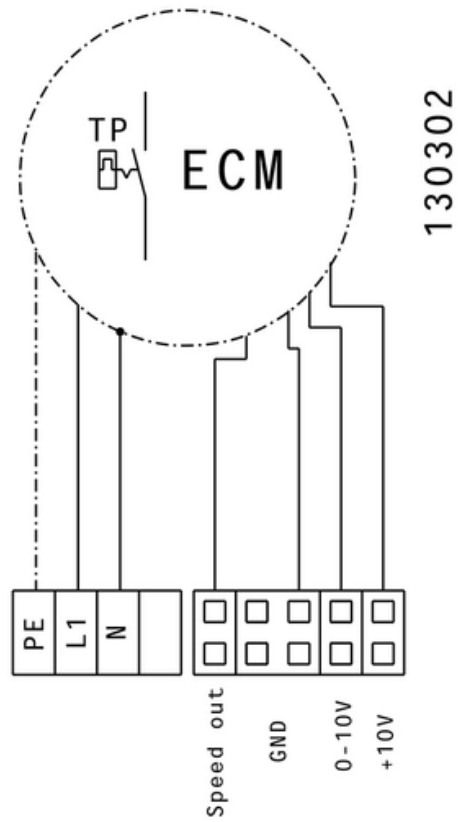

to the product detail page

MECHANICAL ACCESSORIES

RSK 125 | 102179



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

VM 125 | 102647




- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

SG 125 01 | 102895




- Protection grille for tube connection
- Galvanized wire

FV 125 | 112679



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 125 | 112843



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 125 | 112850



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 125D | 113483



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

SDS 125 | 169603



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 125 | 169640



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 7,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

