

KVR 3015 EC 30


131337

- Backward curved centrifugal impeller
- Removable fan unit
- Housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

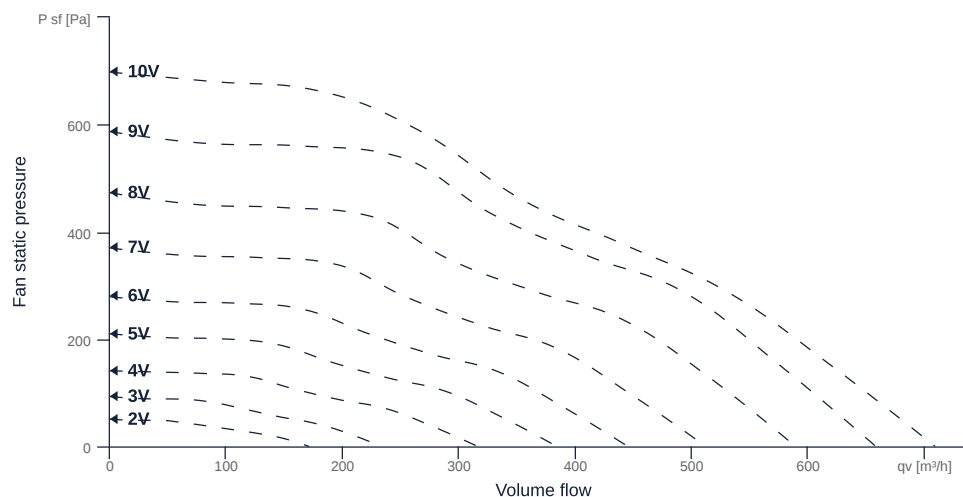

to the product detail page

KVR 3015 EC 30

131337

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	300x150		WxHduct
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP44		IPebox
Weight	6.3	kg	m
Nominal air flow rate, nominal point m³/h	226.8	CmH	q _{v,nom}
Nominal external pressure, static	310.9	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.06	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.04	kw	P _{e,nom}
Face velocity, nominal point	1.4	mps	V _{nom}
Nominal external pressure, static	310.9	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	45.8	p	η _{es,SUP}
Enclosure sound level, nominal point	70	db	LWA2
Rating	Product is compliant 2018		



KVR 3015 EC 30

131337

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	107	107	w	P _{ed, max}
Max. operating current (device)	0.91	0.91	A	I _{ed, max}
Max. speed	3620	3620	rpm	n _{max}
Max. stat. efficiency	41.2	41.2	p	η _{es}
Max. fan efficiency	41.6	41.6	p	η _e
Max. flowrate	710	710	CmH	Q _{v, max}
Max. stat pressure	700	700	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230		v	U _{rated, f1}
Rated current	0.72		A	I _{rated, f1}
Speed	3478		rpm	n _{f1}
Efficiency	42.1		p	η _{m, f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.640000	0.000000		cos φ
UL-Certification motor		None		UL _{cert}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

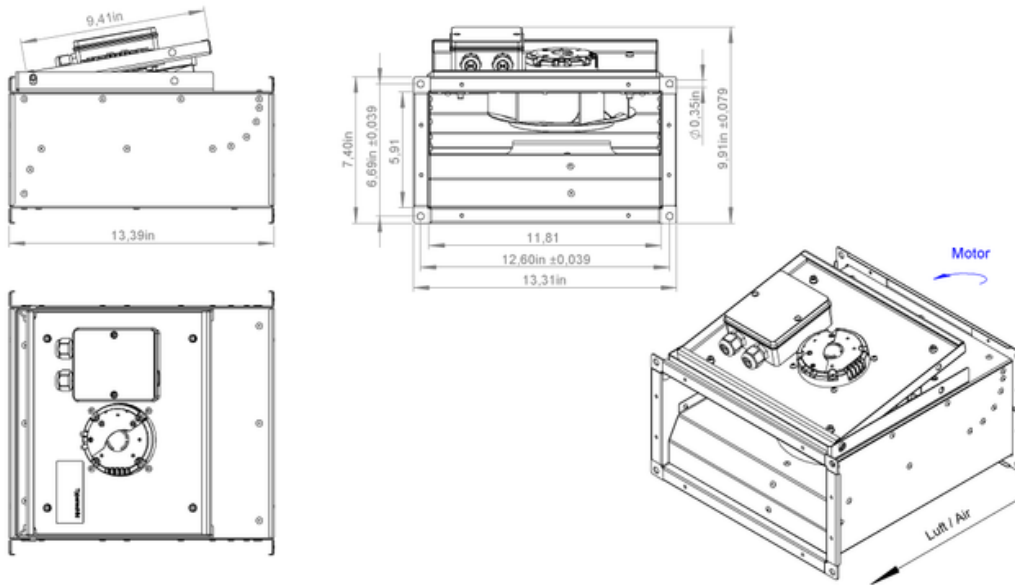


131337 00



KVR 3015 EC 30

131337


ruck

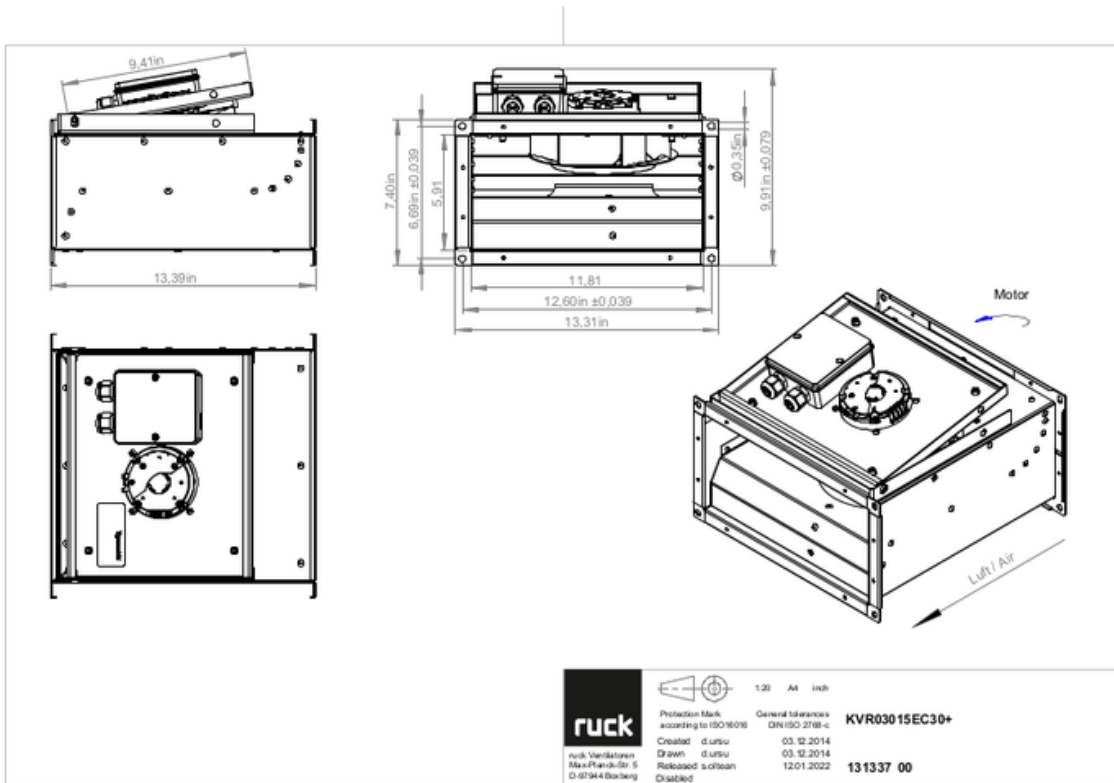

KVR 3015 EC 30

131337


ruck

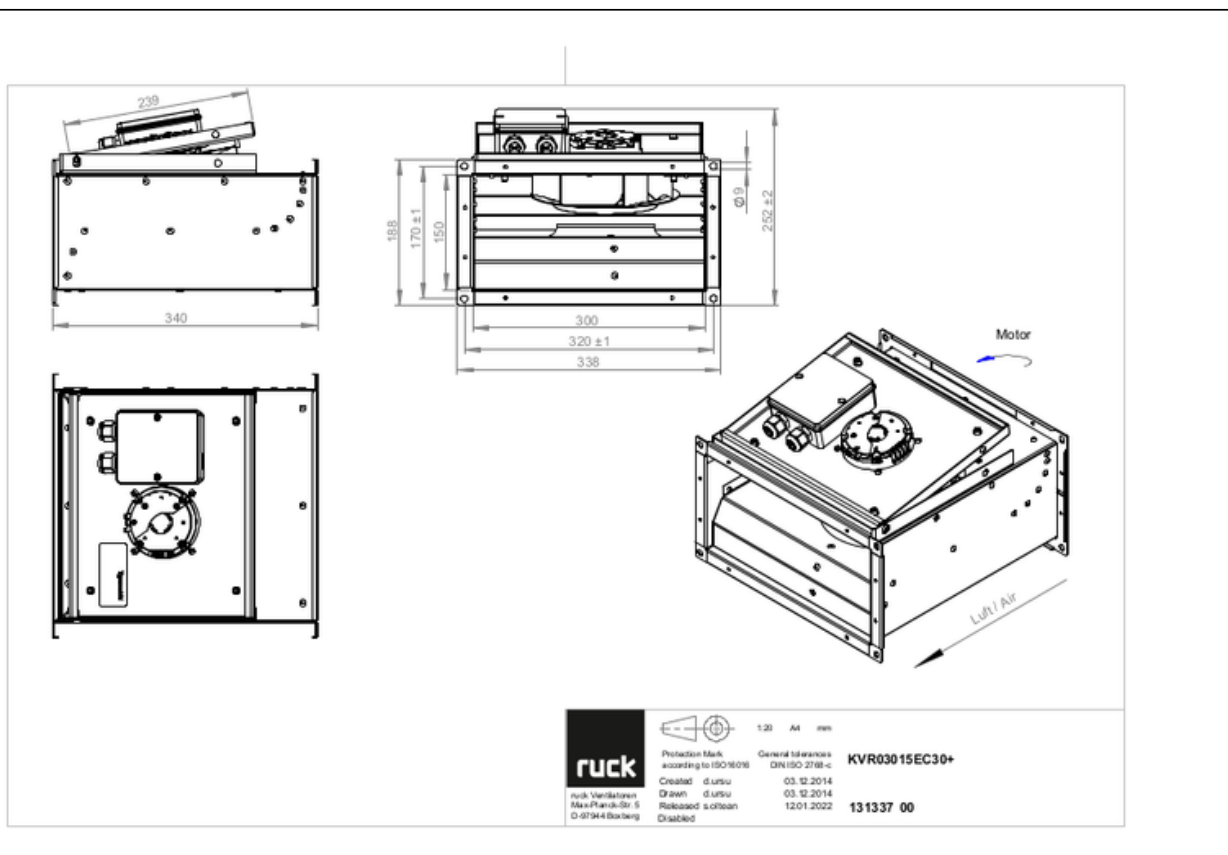

KVR 3015 EC 30

131337

ruck

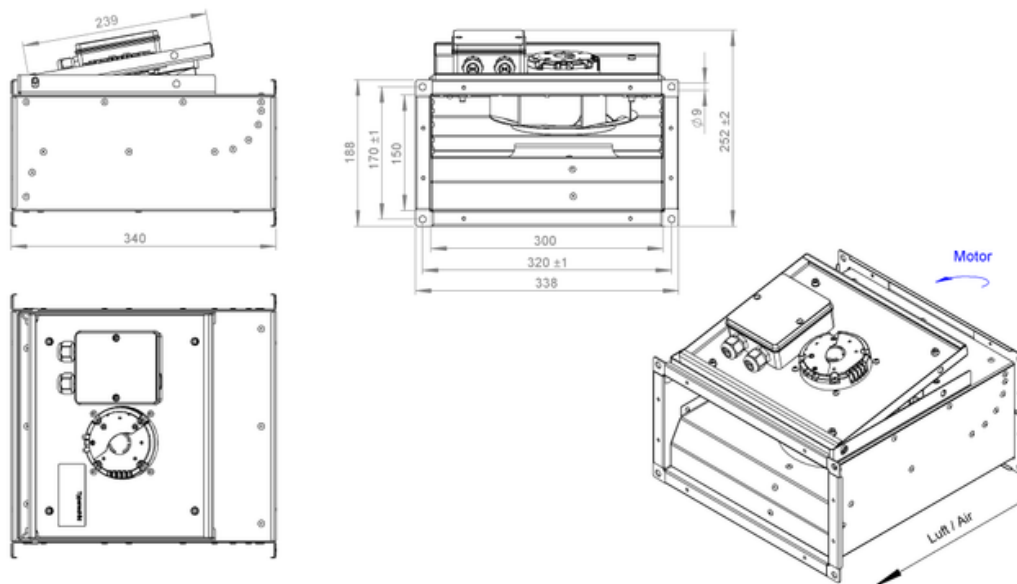


131337 00



KVR 3015 EC 30

131337

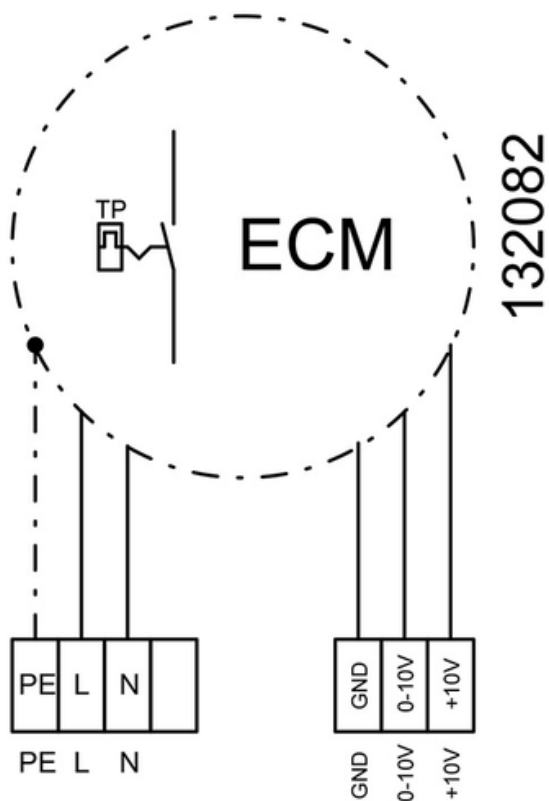

MECHANICAL ACCESSORIES

VS 3015 | 102801



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 3015 | 169679



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 7,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page