

KVR 8050 EC 30


131370

- Backward curved centrifugal impeller
- Removable fan unit
- Housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 50 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

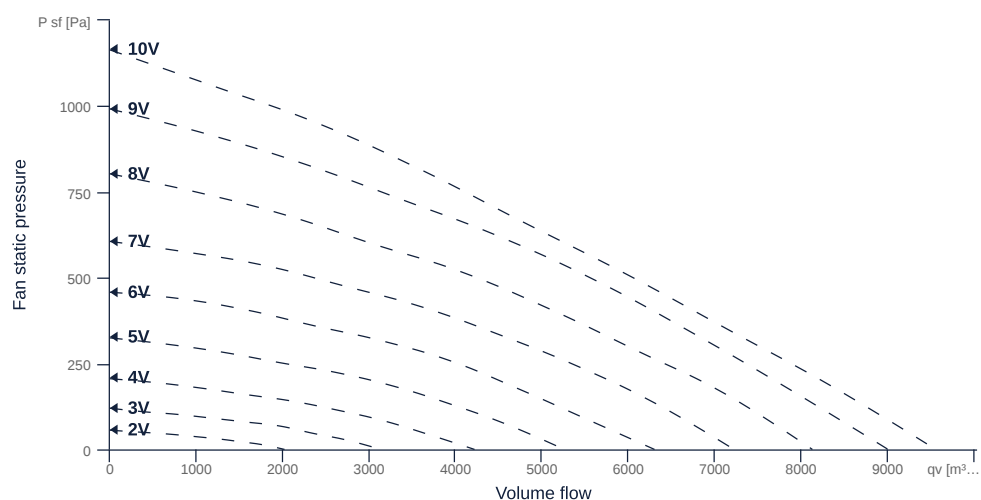

to the product detail page

KVR 8050 EC 30

131370

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	800x500		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	58.05	kg	m
Nominal air flow rate, nominal point m³/h	4302	CmH	q _{v,nom}
Nominal external pressure, static	494	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.2	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.88	kw	P _{e,nom}
Face velocity, nominal point	3	mps	V _{nom}
Nominal external pressure, static	494	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	65.6	p	η _{es,SUP}
Highest external air leakage rate	0.04	p	
Enclosure sound level, nominal point	76	db	LWA2
Rating	Product is compliant 2018		



KVR 8050 EC 30

131370

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1328	1328	w	P _{ed, max}
Max. operating current (device)	2.05	2.05	A	I _{ed, max}
Max. speed	1600	1600	rpm	n _{max}
Max. stat. efficiency	62.5	62.5	p	η _{es}
Max. fan efficiency	63.2	63.2	p	η _e
Max. flowrate	9550	9550	CmH	Q _{v, max}
Max. stat pressure	1160	1160	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwr _{sup} motor
Rated voltage	400	400	v	U _{rated, f1}
Rated current	2.1	2.1	A	I _{rated, f1}
Nominal power	1320	1320	w	P _a
Speed	1350	1350	rpm	n _{f1}
Min. temperature	-25	-25	°C	T _{motor, min}
UL-Certification motor		UL recognized		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

KVR 8050 EC 30

131370

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

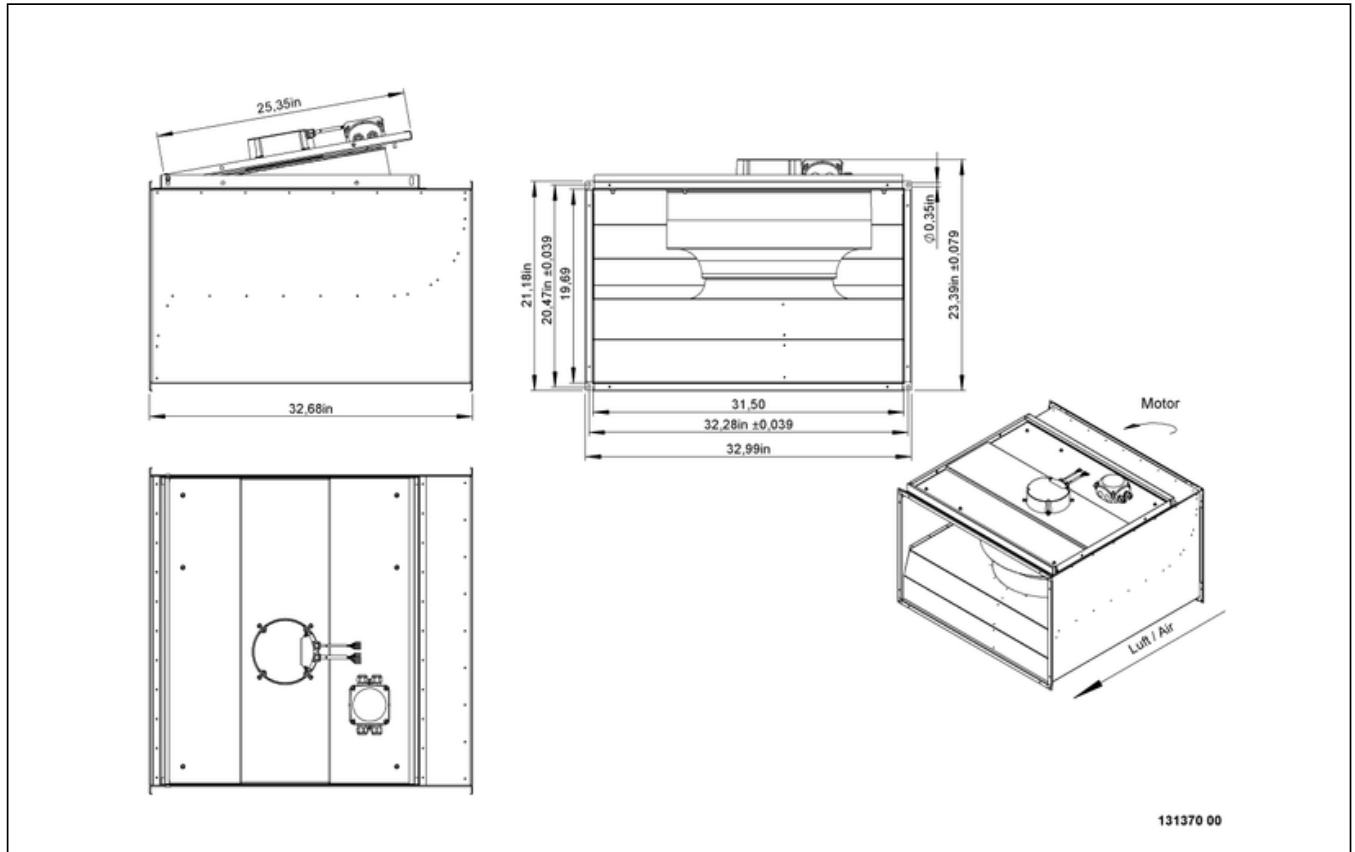


to the product detail page

KVR 8050 EC 30

131370

ruck

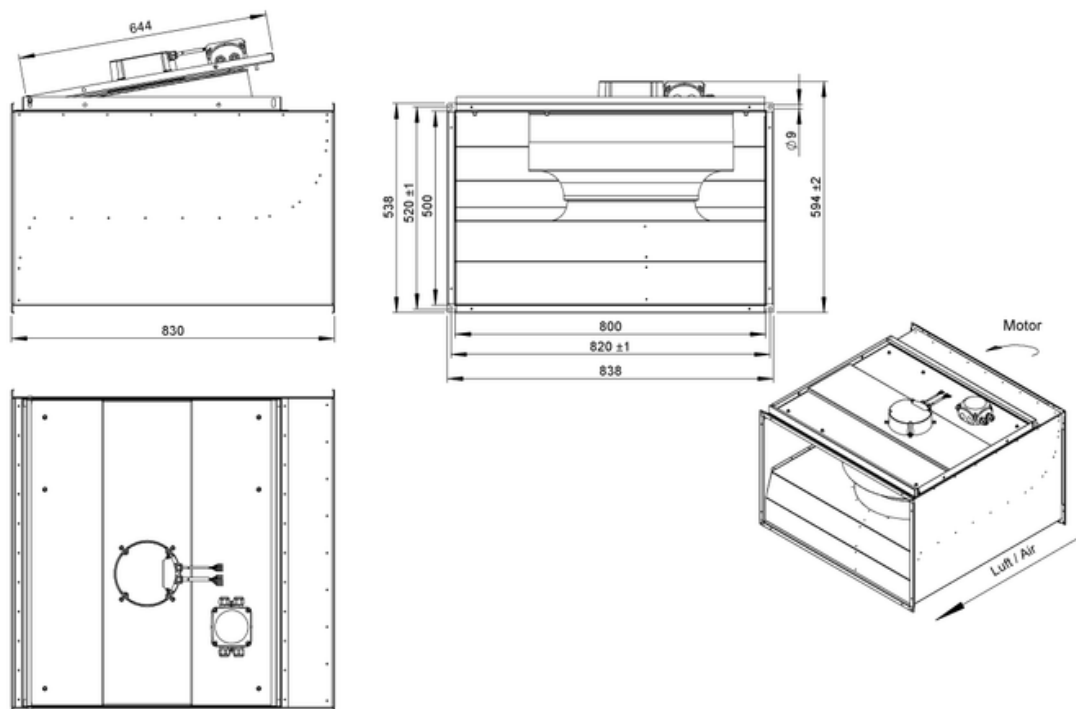

131370 00




to the product detail page

KVR 8050 EC 30


131370

ruck

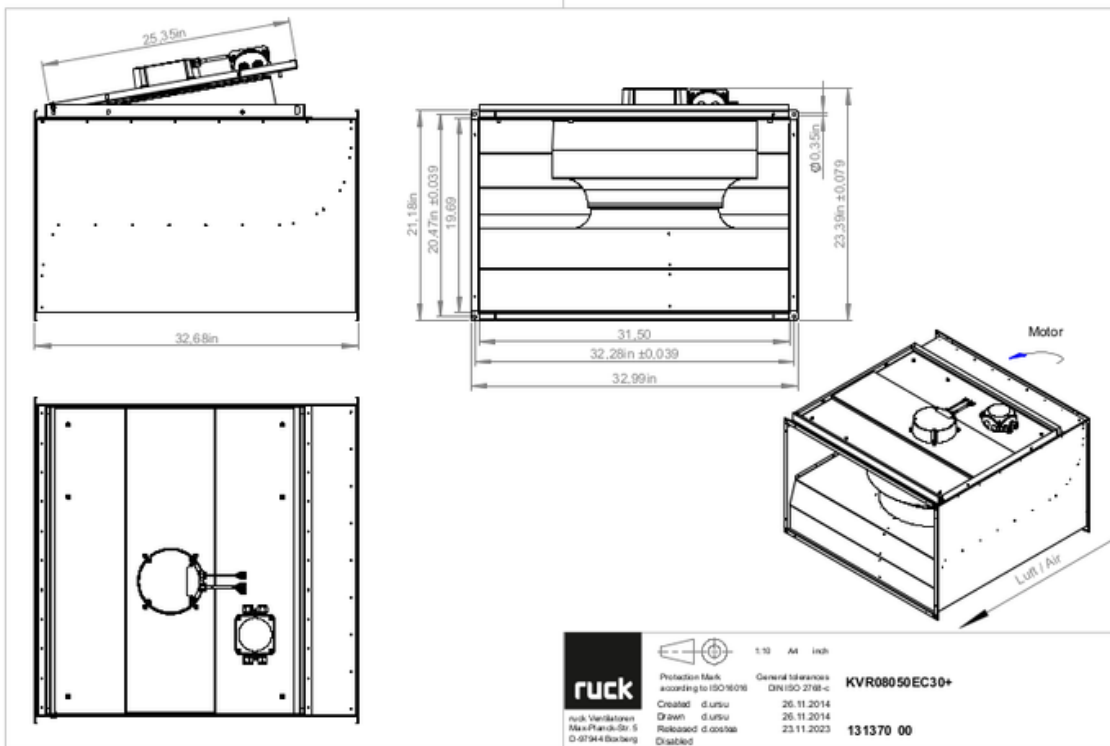

KVR 8050 EC 30


131370

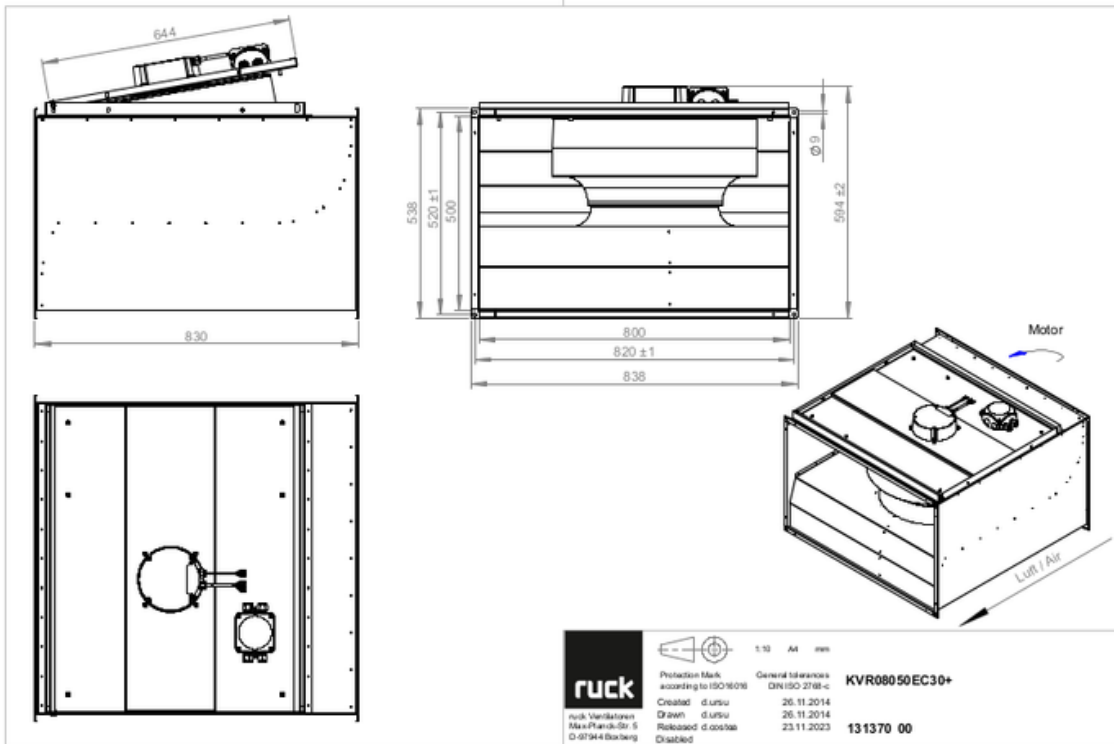

KVR 8050 EC 30

131370

169886

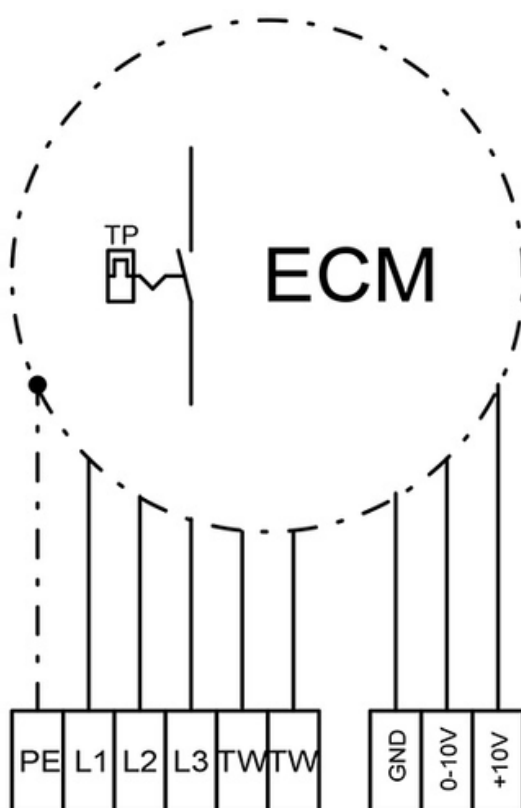

MECHANICAL ACCESSORIES

VS 8050 | 103953



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 8050 | 169686



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 7,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

