

KVRI 6035 E4 31


131407

- Backward curved centrifugal impeller
- Swing out fan unit
- Galvanized sheet steel housing, double-walled, 25 mm mineral wool
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 65 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

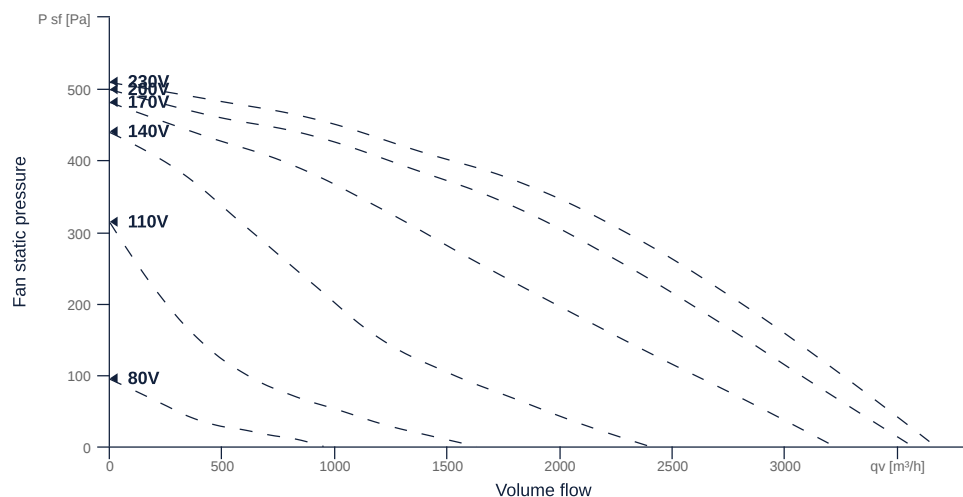

to the product detail page

KVRI 6035 E4 31

131407

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	600x350		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	35.55	kg	m
Nominal air flow rate, nominal point m³/h	2577.6	CmH	q _{v,nom}
Nominal external pressure, static	246	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.72	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.44	kw	P _{e,nom}
Face velocity, nominal point	3.41	mps	V _{nom}
Nominal external pressure, static	246	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	47.2	p	η _{es,SUP}
Enclosure sound level, nominal point	64	db	LWA2
Rating	Product is compliant 2018		



MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	440	w	P _{ed, max}
Max. operating current (device)	2.53	A	I _{ed, max}
Max. speed	1440	rpm	n _{max}
Max. stat. efficiency	41.4	p	η _{es}
Max. fan efficiency	41.8	p	η _e
Max. flowrate	3670	CmH	Q _{v, max}
Max. stat pressure	510	Pa	p _{sf, max}
Max. medium temperature	65	°C	T _{m, max}
Max. environment temperature	65	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	v	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISO _{class}
Motor-protection		TAE		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 1~		pwr _{sup} _{motor}
Capacity capacitor		9	μF	C _{cond}
Voltage capacitor		400	v	V _{Ucond}
Number of poles (1)		4.000000		num poles _{w1}
Rated voltage	230		v	U _{rated, f1}
Rated current	2.33		A	I _{rated, f1}
Speed	1340		rpm	n _{f1}
Starting current	5.9		A	I _{start, f1}
Min. temperature	-40		°C	T _{motor, min}
UL-Certification motor		None		UL _{cert}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

KVRI 6035 E4 31

131407

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

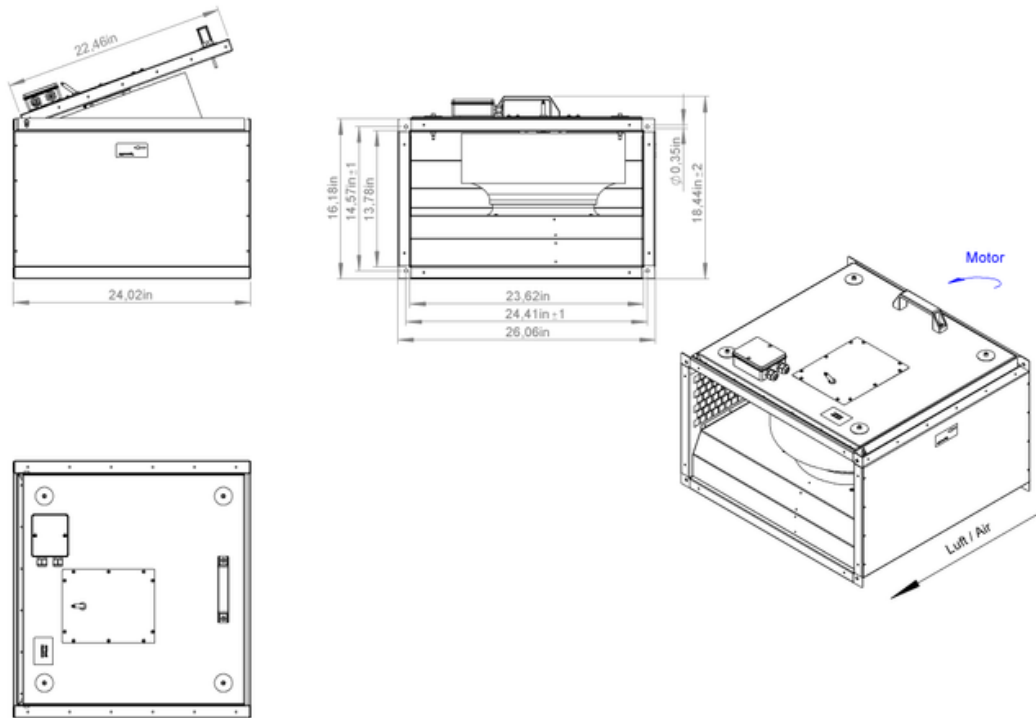

131407 00




to the product detail page

KVRI 6035 E4 31


131407

ruck

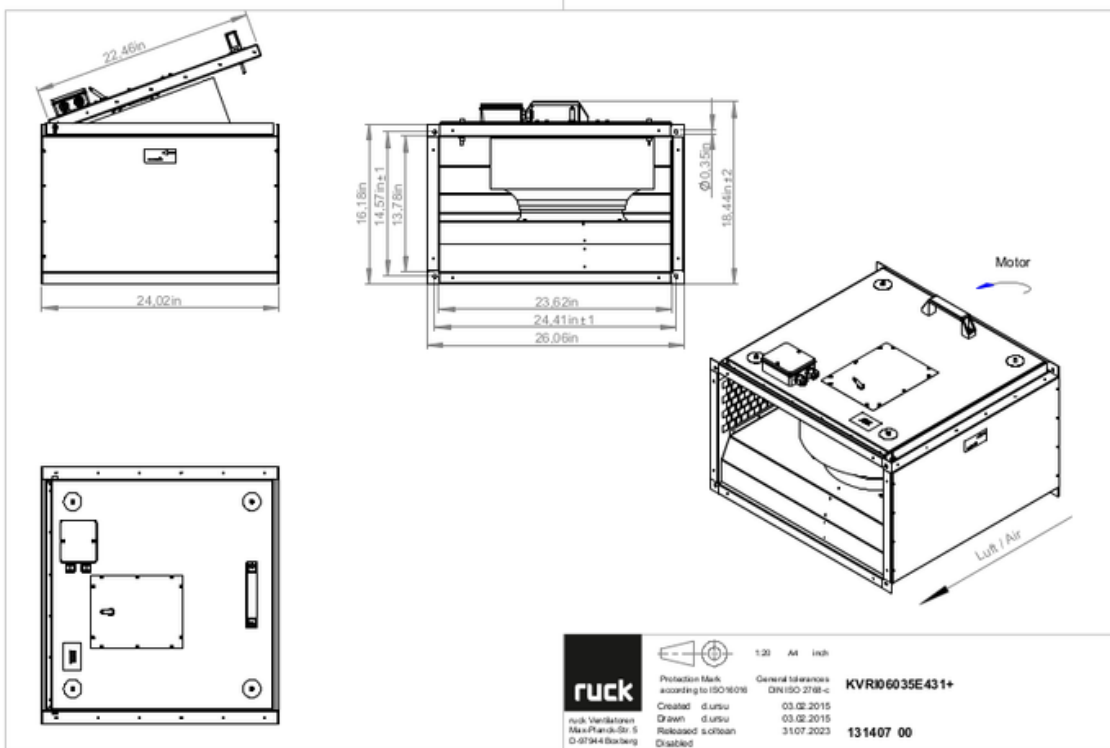

KVRI 6035 E4 31


131407

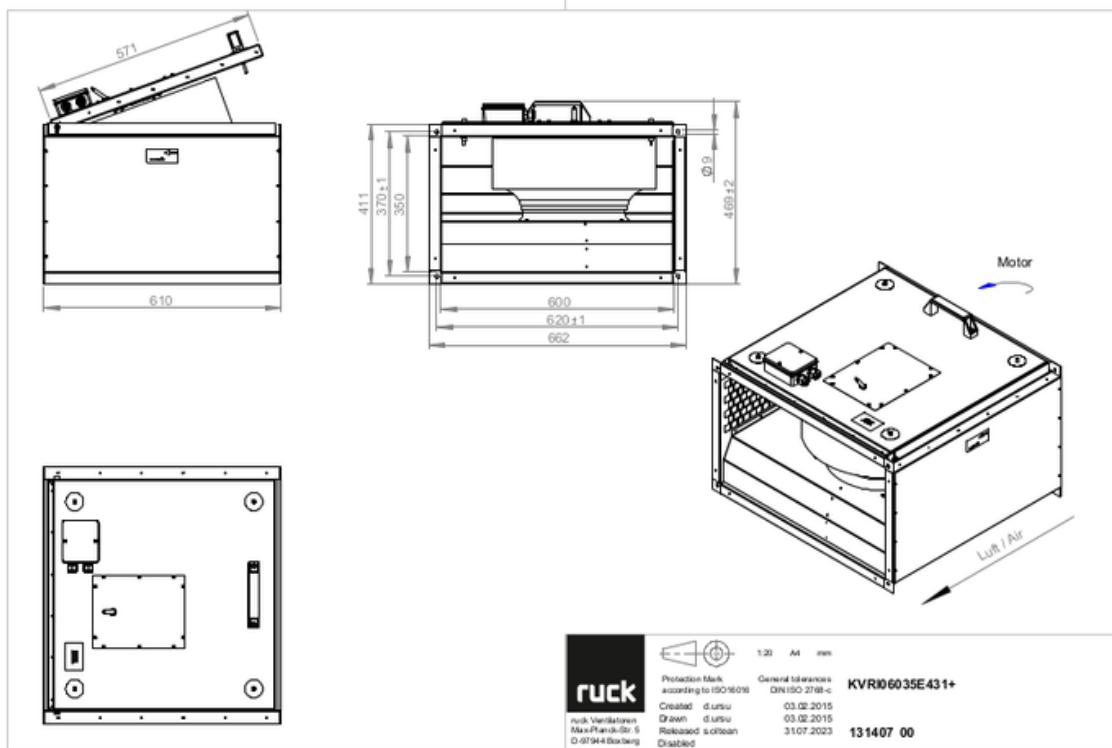

to the product detail page

KVRI 6035 E4 31


131407

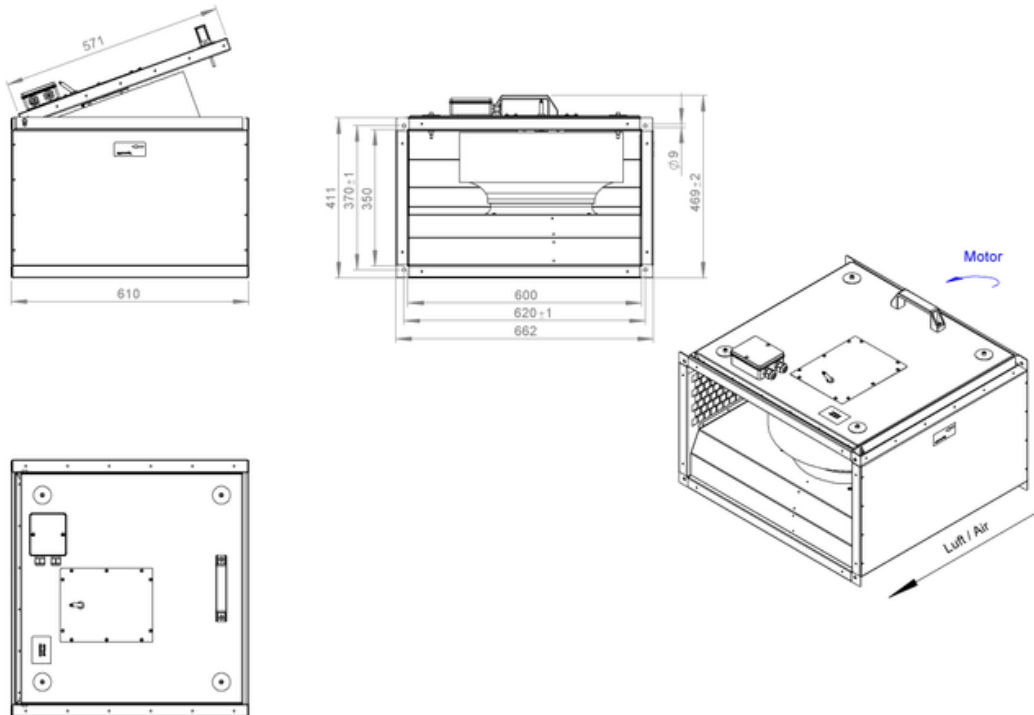

131407 00



to the product detail page

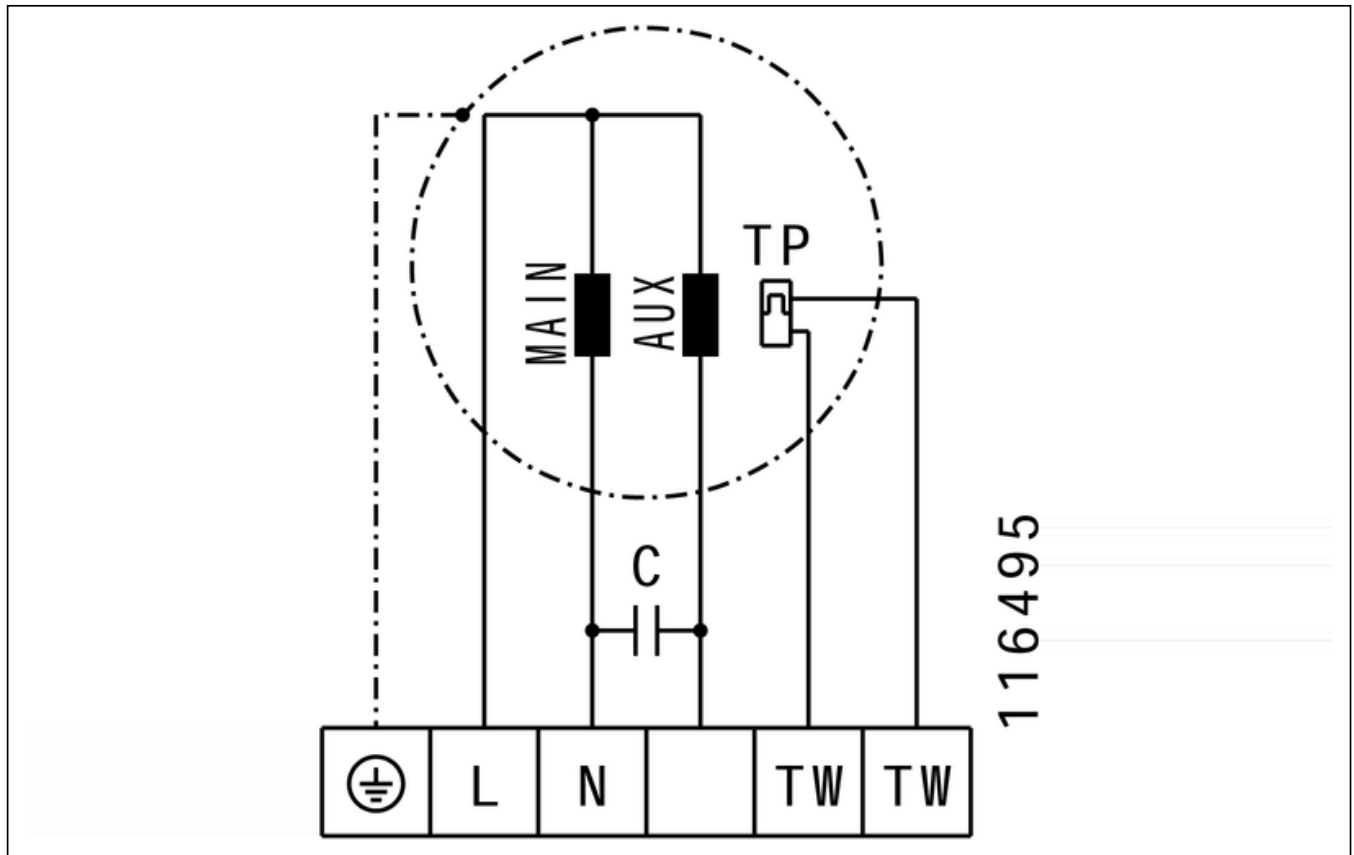

MECHANICAL ACCESSORIES

VS 6035 | 102808



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 6035 | 169684



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C



KVRI 6035 E4 31

131407

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- $I_{max} = 25 \text{ A}$

TEM 035 | 103502



- 5-step transformer
- 230 V, 50/60 Hz, 3.5 A
- Output voltage: 230-190-170-140-110-80-0 V
- Protection class IP 54

TES 035 02 | 146195



- 5-step transformer
- 230 V, 50/60 Hz, 3.5 A
- Without housing, control cabinet installation
- Protection class IP 20



to the product detail page