

KVRI 8050 EC 30


131443

- Backward curved centrifugal impeller
- Swing out fan unit
- Galvanized sheet steel housing, double-walled, 25 mm mineral wool
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

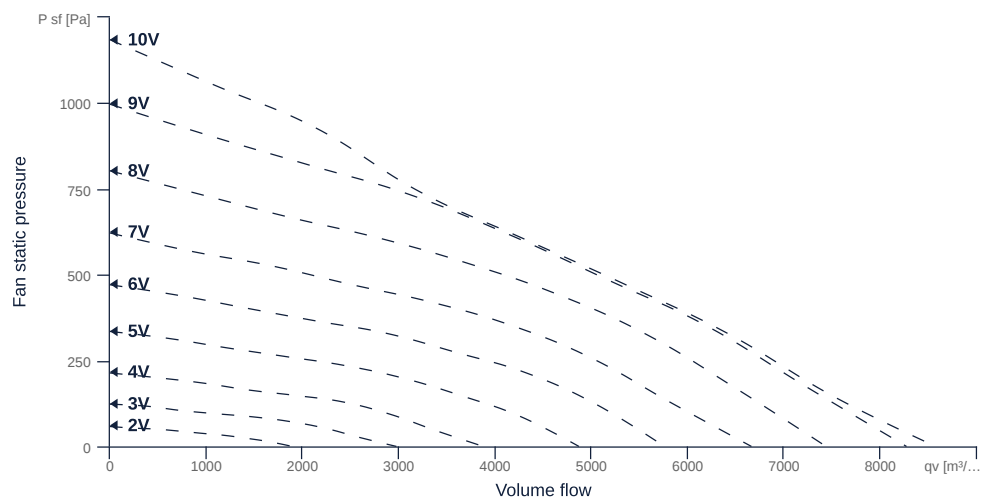

to the product detail page

KVRI 8050 EC 30

131443

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	800x500		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	72.3	kg	m
Nominal air flow rate, nominal point m³/h	4078.8	CmH	q _{v,nom}
Nominal external pressure, static	502.1	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.13	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.9	kw	P _{e,nom}
Face velocity, nominal point	2.8	mps	V _{nom}
Nominal external pressure, static	502.1	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	65.6	p	η _{es,SUP}
Enclosure sound level, nominal point	70	db	LWA2
Rating	Product is compliant 2018		



KVRI 8050 EC 30

131443

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1173	1173	w	P _{ed, max}
Max. operating current (device)	1.81	1.81	A	I _{ed, max}
Max. speed	1620	1620	rpm	n _{max}
Max. stat. efficiency	59.1	59.1	p	η _{es}
Max. fan efficiency	59.7	59.7	p	η _e
Max. flowrate	8570	8570	CmH	Q _{v, max}
Max. stat pressure	1180	1180	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISO _{class}
Motor-protection		TEC		protect _{motor}
Protection class		IP55		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 3~		pwr _{sup} _{motor}
Rated voltage	400	400	v	U _{rated, f1}
Rated current	2.1	2.1	A	I _{rated, f1}
Nominal power	1320	1320	w	P _a
Speed	1350	1350	rpm	n _{f1}
Min. temperature	-25	-25	°C	T _{motor, min}
UL-Certification motor		UL recognized		UL _{cert}

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}




to the product detail page

KVRI 8050 EC 30

131443

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

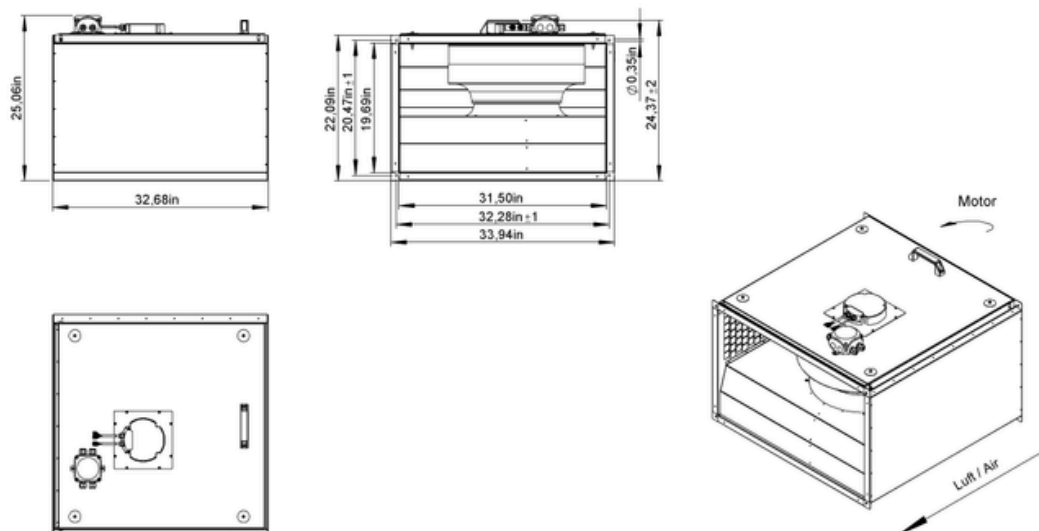

131443 00




to the product detail page

KVRI 8050 EC 30

131443


ruck

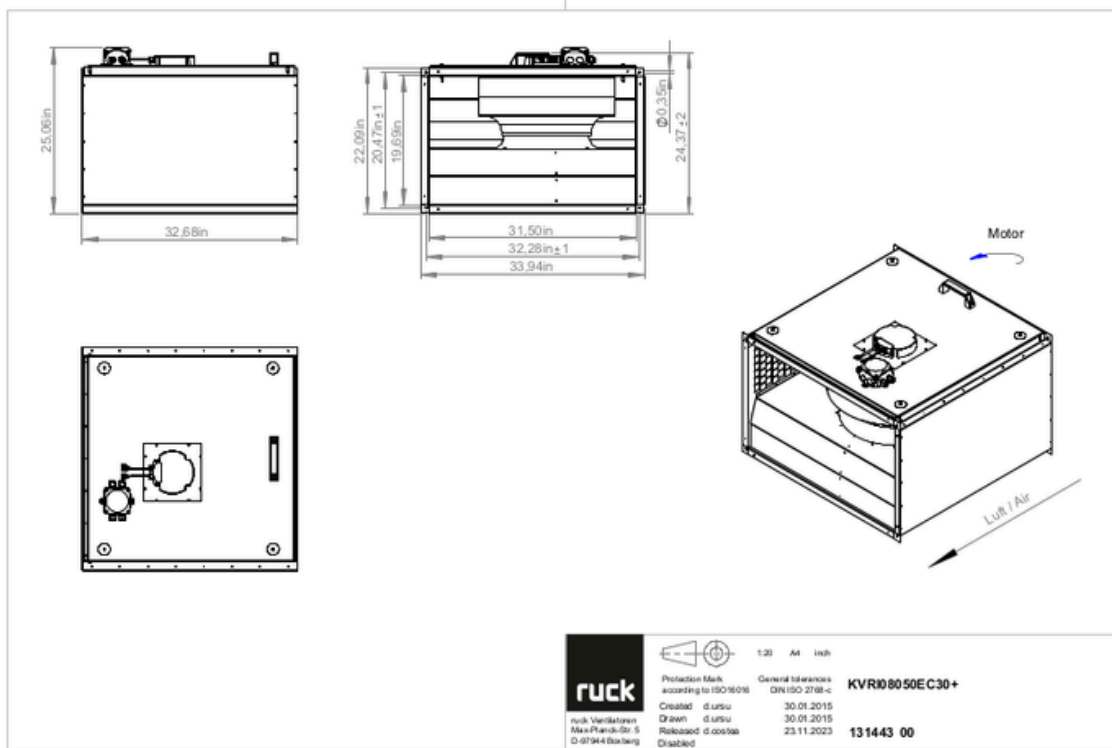

KVRI 8050 EC 30

131443





ruck

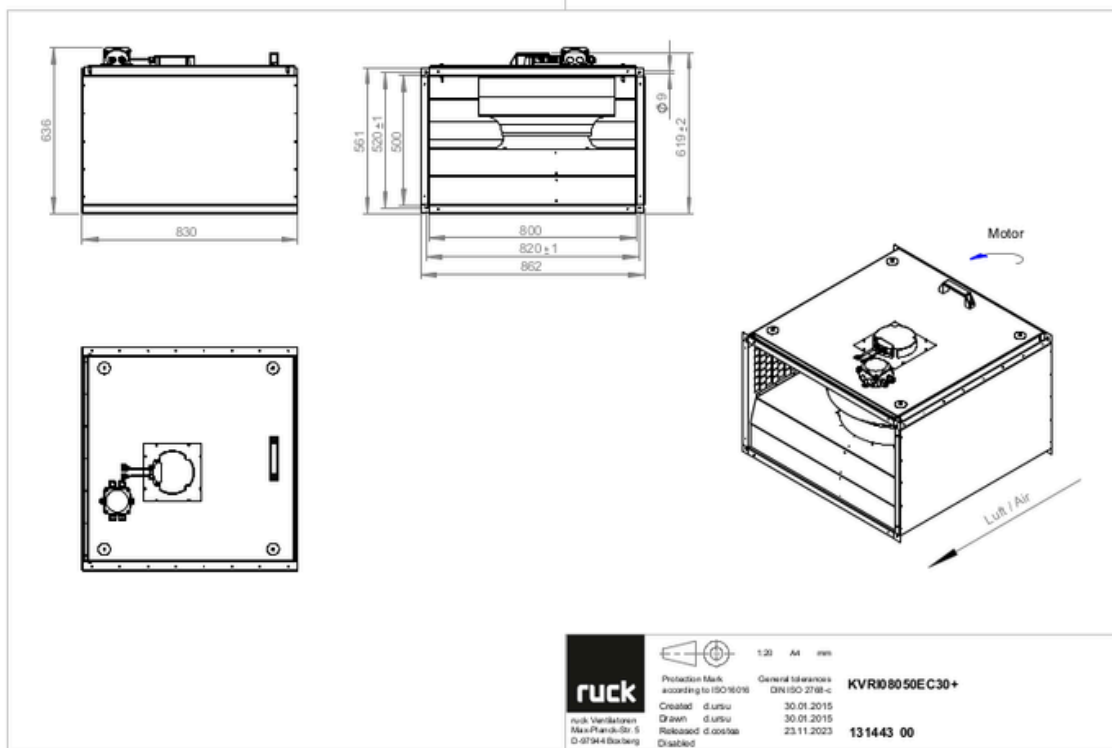

KVRI 8050 EC 30

131443

ruck




131443 00



KVRI 8050 EC 30

131443

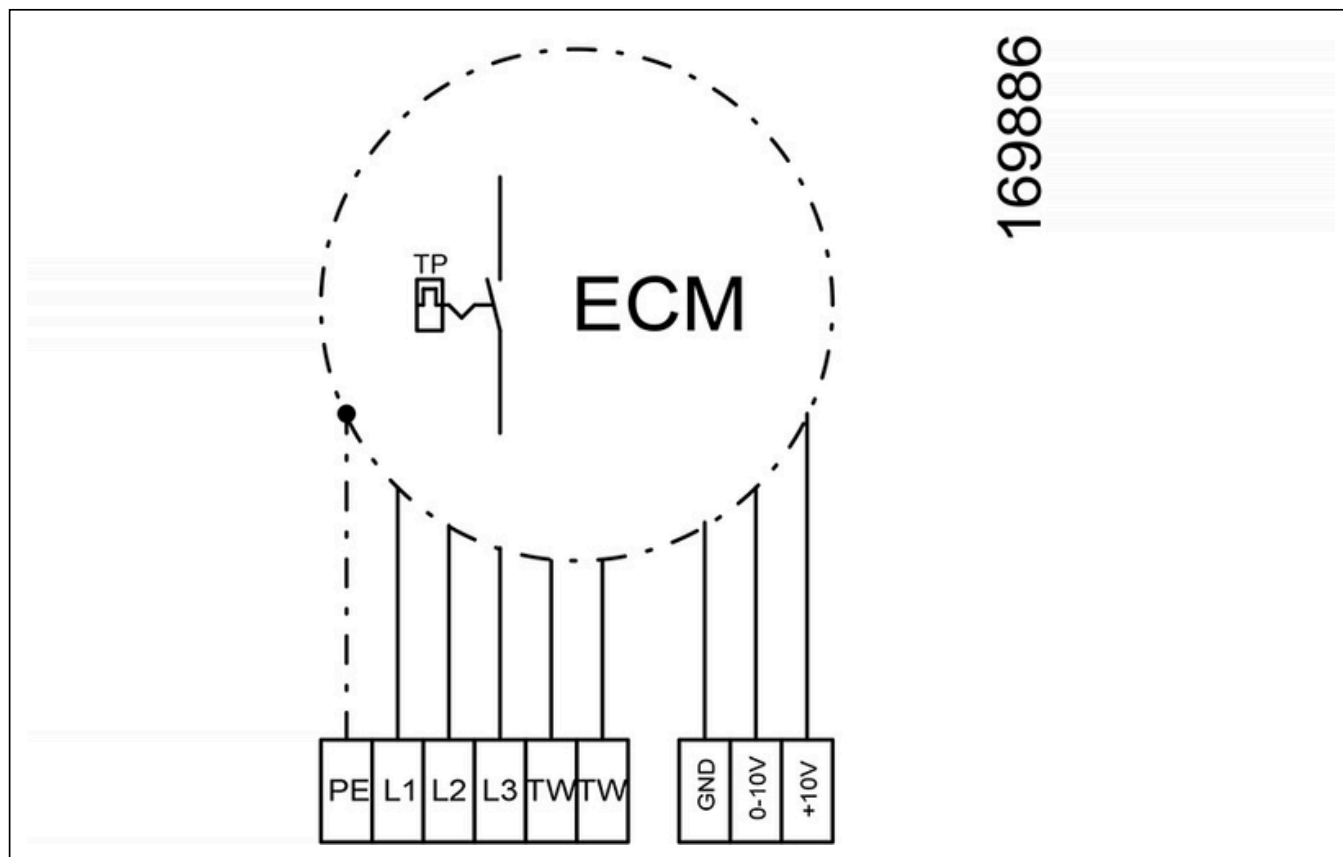

MECHANICAL ACCESSORIES

VS 8050 | 103953



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 8050 | 169686



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 7,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page