

KVT 6030 E4 20

132861


ruck

- Forward curved centrifugal fan
- Swing out fan unit
- Housing made of galvanized sheet steel
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 50 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

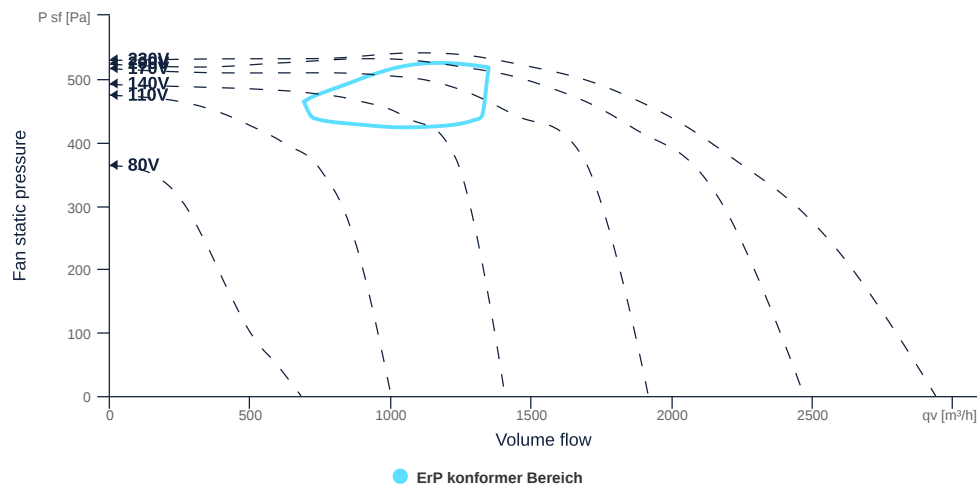

to the product detail page

KVT 6030 E4 20

132861

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	none		
Duct size	600x300		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	25.5	kg	m
Nominal air flow rate, nominal point m³/h	1188	CmH	q _{v,nom}
Nominal external pressure, static	463	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.33	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.42	kw	P _{e,nom}
Face velocity, nominal point	1.83	mps	v _{nom}
Nominal external pressure, static	463	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	36.58	p	η _{es,EHA}
Enclosure sound level, nominal point	64.72	db	LWA2
Rating	Product is compliant 2018		



to the product detail page

KVT 6030 E4 20

132861

ruck

MAXIMAL DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1185	1026	w	P _{ed, max}
Max. operating current (device)	5.46	5.46	A	I _{ed, max}
Max. speed	1470	1730	rpm	n _{max}
Max. stat. efficiency	35.3	31.7	p	η _{es}
Max. fan efficiency	35.5	32	p	η _e
Max. flowrate	2900	2395	CmH	Q _{v, max}
Min. stat pressure	50	350	Pa	p _{sf, min}
Max. stat pressure	530	740	Pa	p _{sf, max}
Max. medium temperature	50	45	°C	T _{m, max}
Max. environment temperature	50	45	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	v	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISO _{class}
Motor-protection		TAO		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 1~		pwr _{sup} _{motor}
Capacity capacitor		16	μF	C _{cond}
Voltage capacitor		450	v	VU _{cond}
Number of poles (1)		4.000000		num poles _{w1}
Rated voltage	230	230	v	U _{rated, f1}
Rated current	4.75	5.13	A	I _{rated, f1}
Speed	1230	1410	rpm	n _{f1}
Min. temperature	-25	-25	°C	T _{motor, min}
UL-Certification motor		UL recognized		UL _{cert}




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

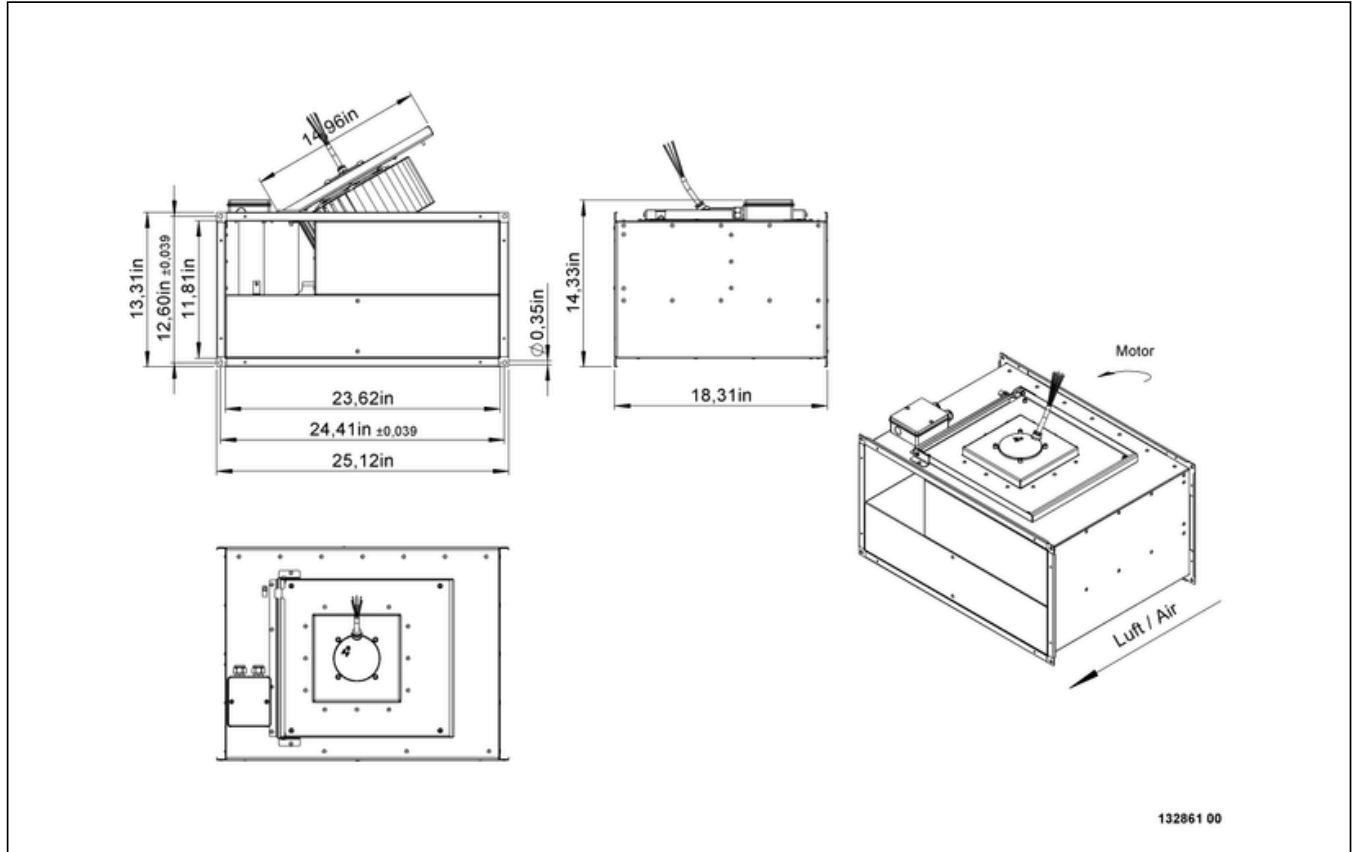

KVT 6030 E4 20

132861

ruck

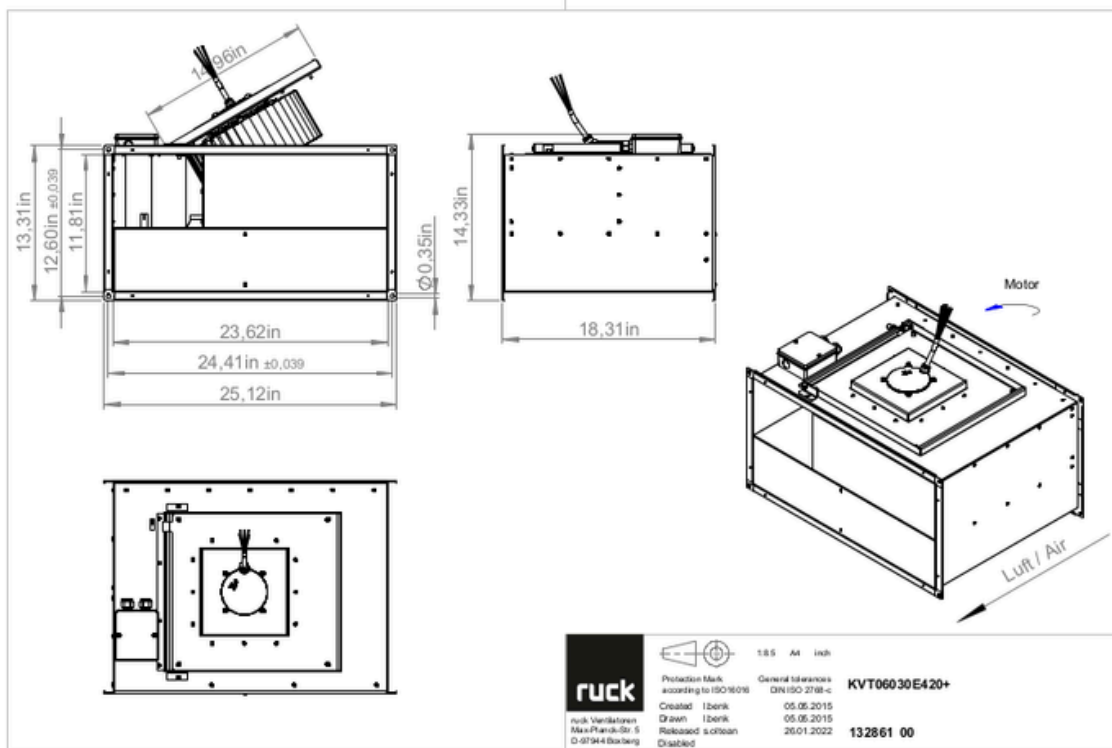


to the product detail page

KVT 6030 E4 20

132861

ruck

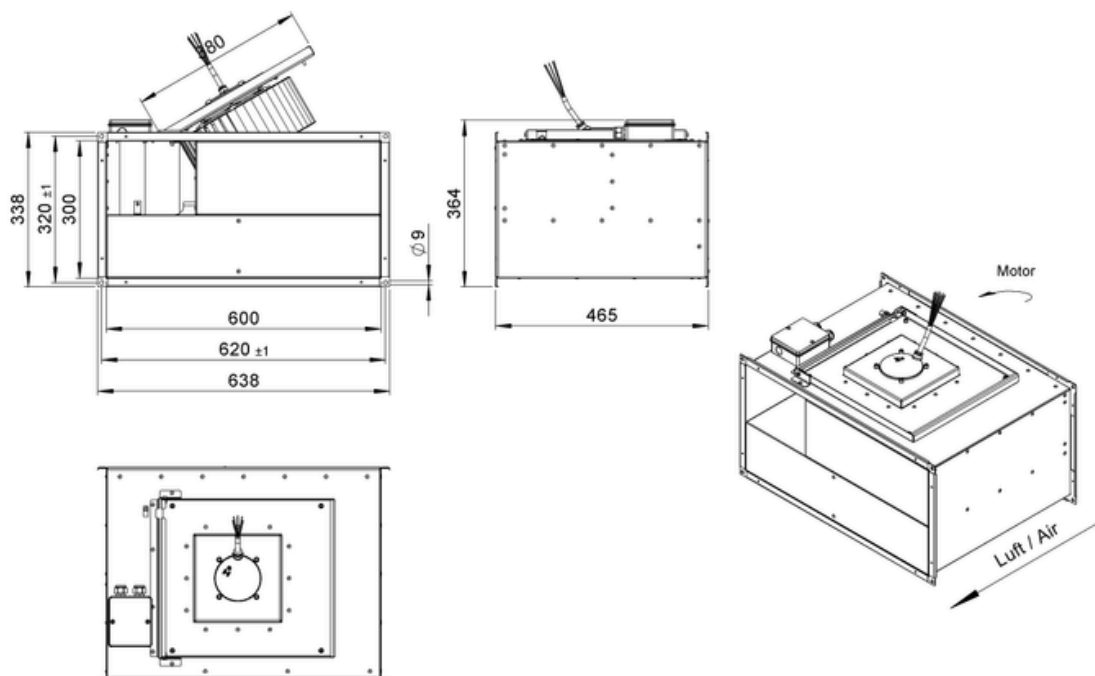

132861 00





to the product detail page

KVT 6030 E4 20

132861

ruck

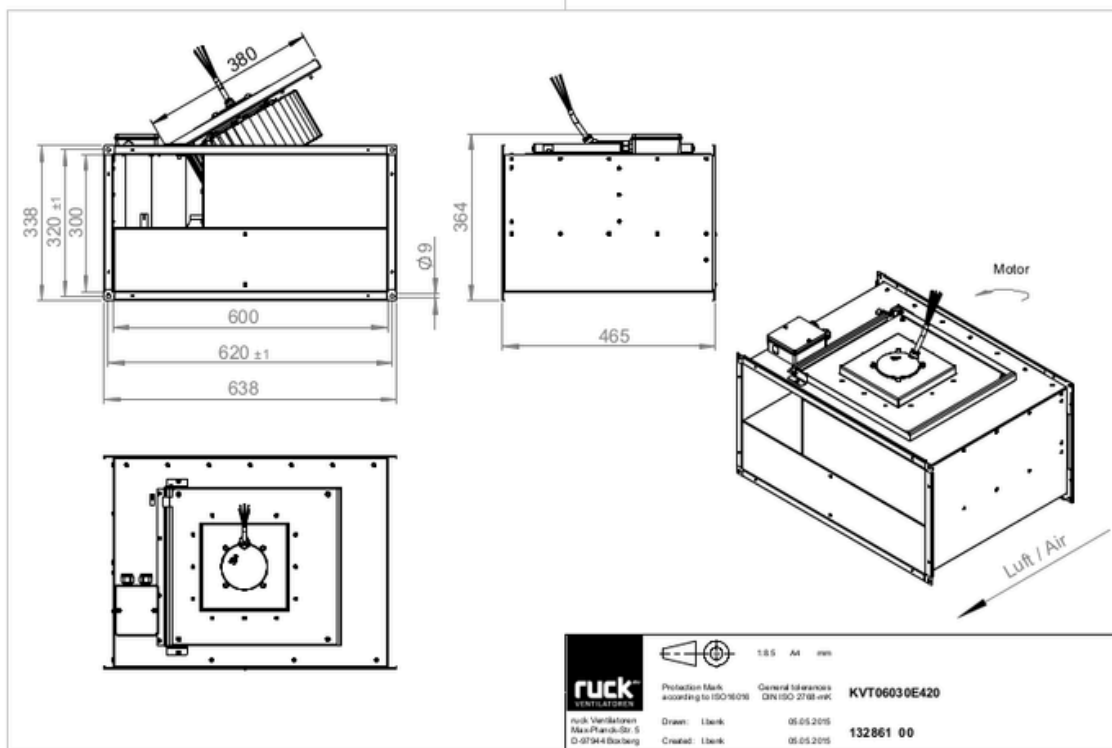

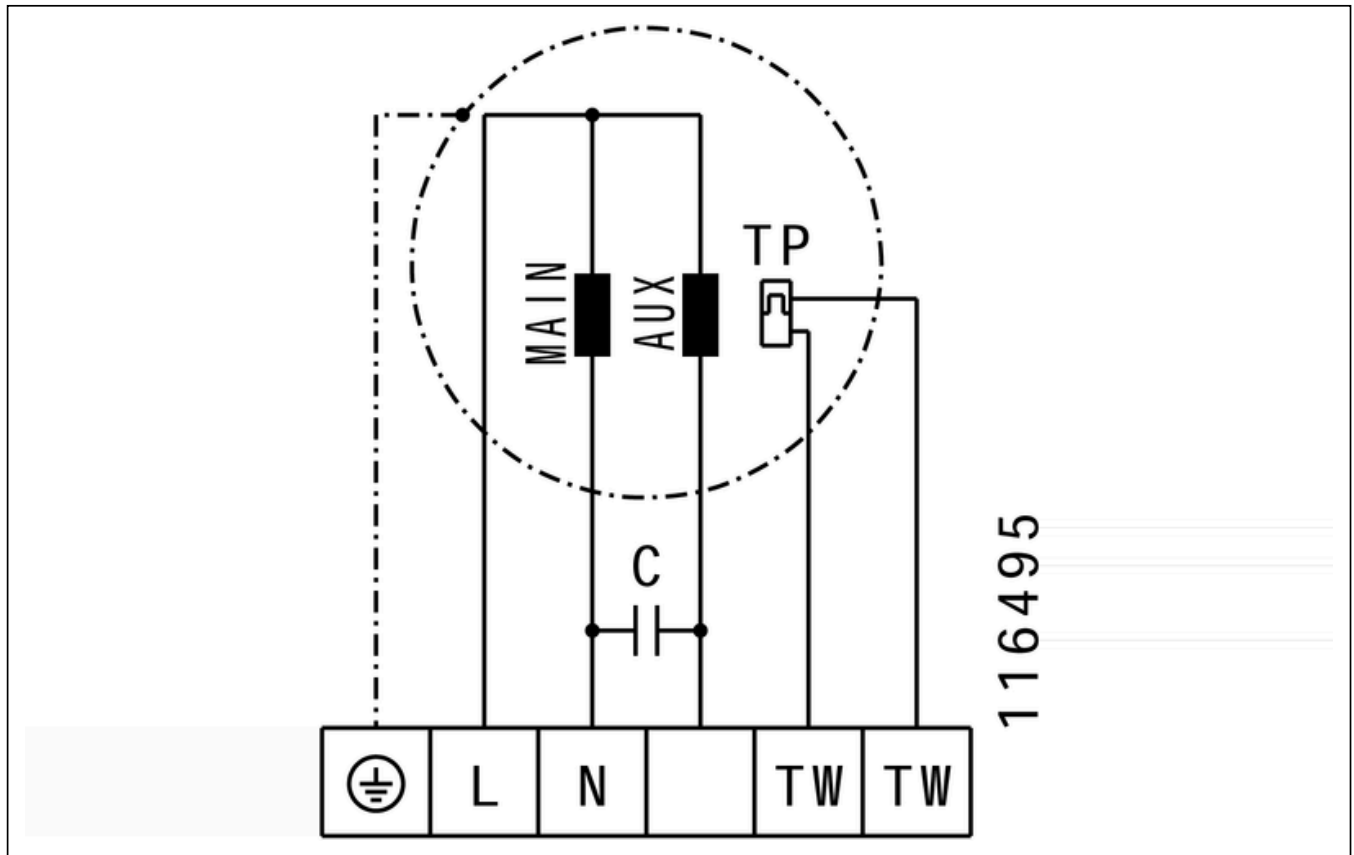

MECHANICAL ACCESSORIES

VS 6030 | 102806



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 6030 | 169683



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C



to the product detail page

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- $I_{max} = 25 \text{ A}$

TEM 075 | 103507



- 5-step transformer
- 230 V, 50/60 Hz, 7.5 A
- Output voltage: 230-190-170-140-110-80-0 V
- Protection class IP 54
- With motor protection

TES 075 02 | 146197



- 5-step transformer
- 230 V, 50/60 Hz, 7.5 A
- Without housing, control cabinet installation
- Protection class IP 20



to the product detail page