

KVT 6035 D4 31


132715

- Forward curved centrifugal fan
- Swing out fan unit
- Housing made of galvanized sheet steel
- Robust three phase AC motor, voltage controllable
- Integrated thermal switch



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

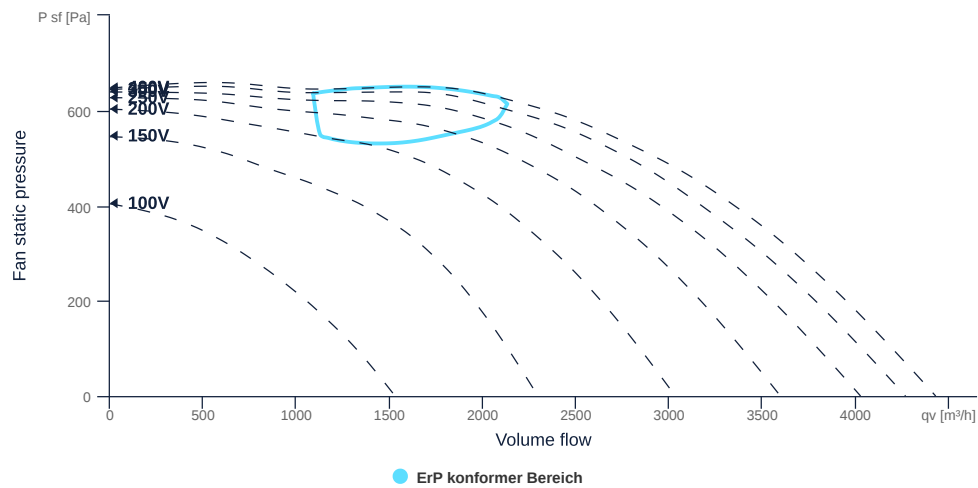

to the product detail page

KVT 6035 D4 31

132715

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	none		
Duct size	600x350		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	34	kg	m
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
------	-------	------	----------------

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	2125	w	P _{ed, max}
Max. operating current (device)	4.4	A	I _{ed, max}
Max. speed	1480	rpm	n _{max}
Max. stat. efficiency	38.9	p	η _{es}
Max. fan efficiency	39.1	p	η _e
Max. flowrate	4420	CmH	q _{v, max}
Max. stat pressure	650	Pa	p _{sf, max}
Max. medium temperature	55	°C	T _{m, max}
Max. environment temperature	55	°C	T _{amb, max}
Min. environment temperature	-30	°C	T _{amb, min}
Min. voltage	100	v	U _{min}



to the product detail page

KVT 6035 D4 31

132715

ruck


MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAO		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ			wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230		v	U _{rated, f1}
Rated voltage (wiring 2)	400		v	U _{rated, f2}
Rated current	6.75		A	I _{rated, f1}
Rated current (wiring 2)	3.9		A	I _{rated, f2}
Speed	1310		rpm	n _{f1}
Speed (wiring 2)	1310		rpm	n _{f2}
Starting current	24		A	I _{start, f1}
Starting current (wiring 2)	14		A	I _{start, f2}
Efficiency	37.5		p	η _{m, f1}
Efficiency (wiring 2)	37.5		p	η _{m, f2}
Min. temperature	-40		°C	T _{motor, min}
UL-Certification motor		None		ULcert




to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

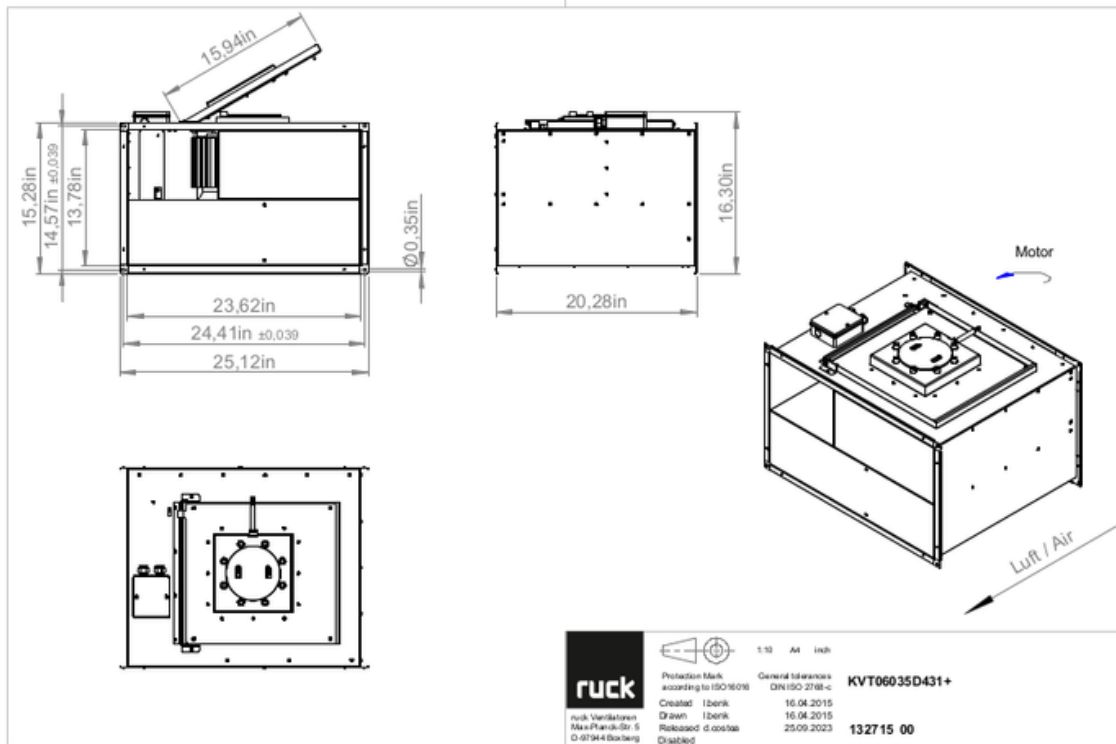

KVT 6035 D4 31

132715

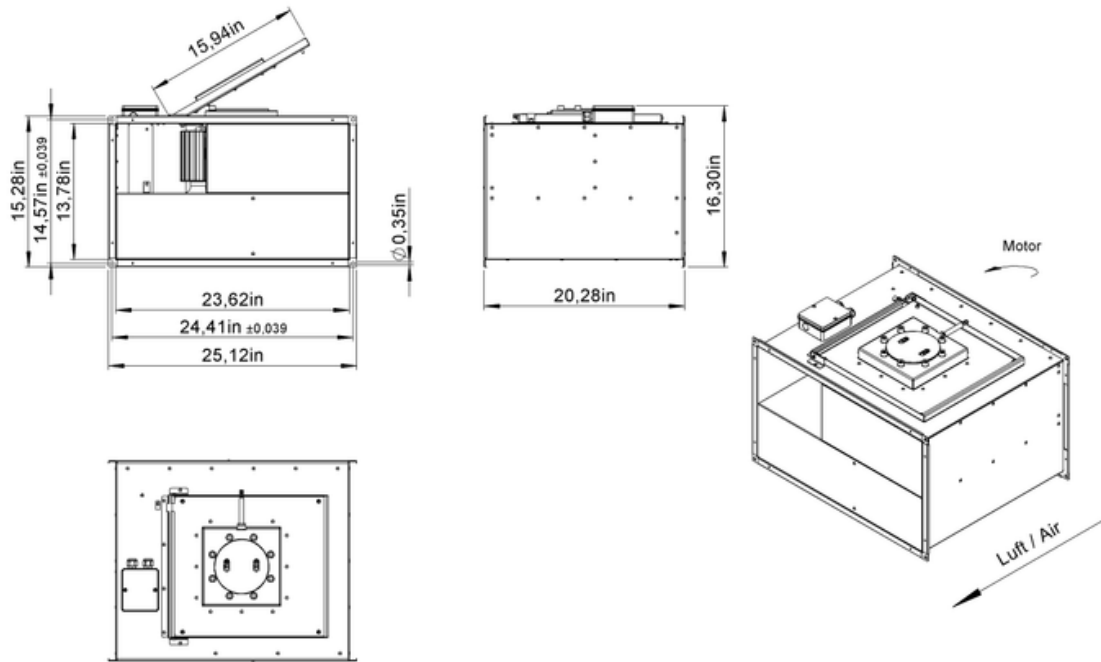

132715 00




to the product detail page

KVT 6035 D4 31

132715



ruck

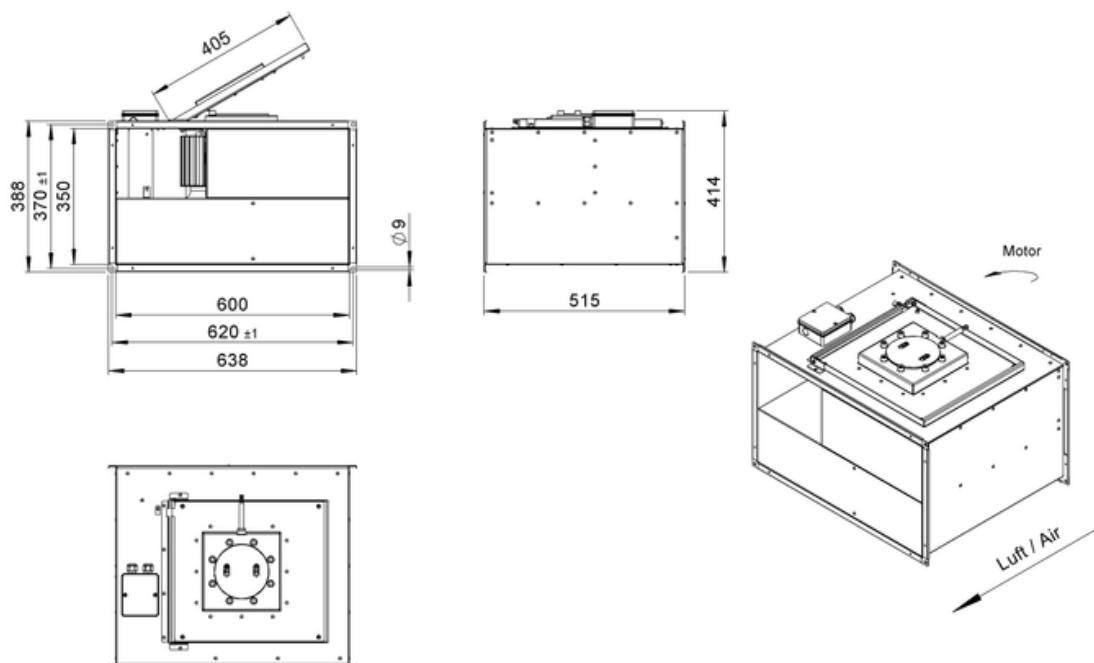

132715 00



to the product detail page

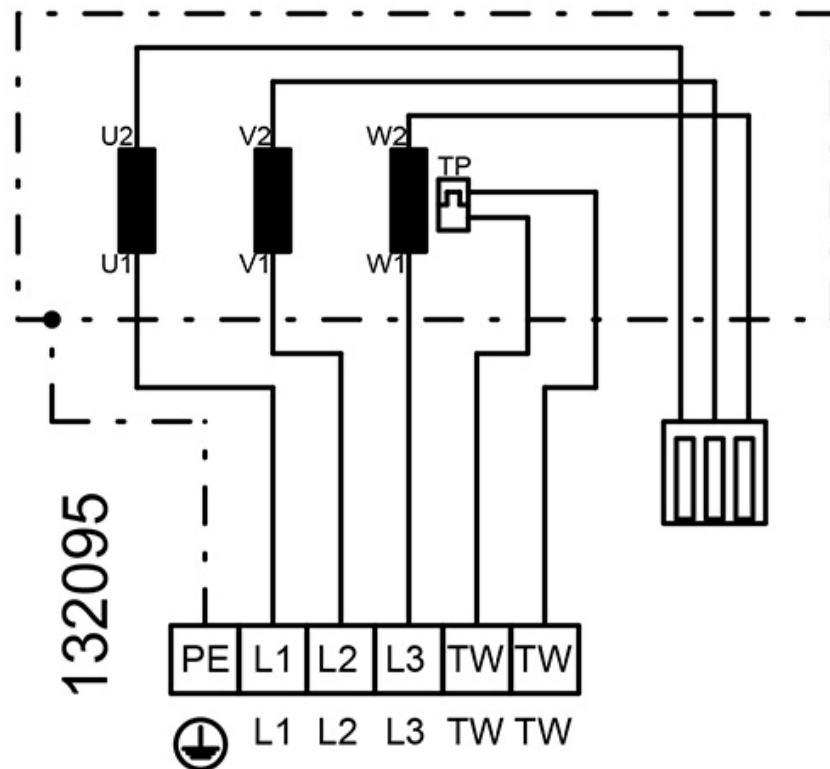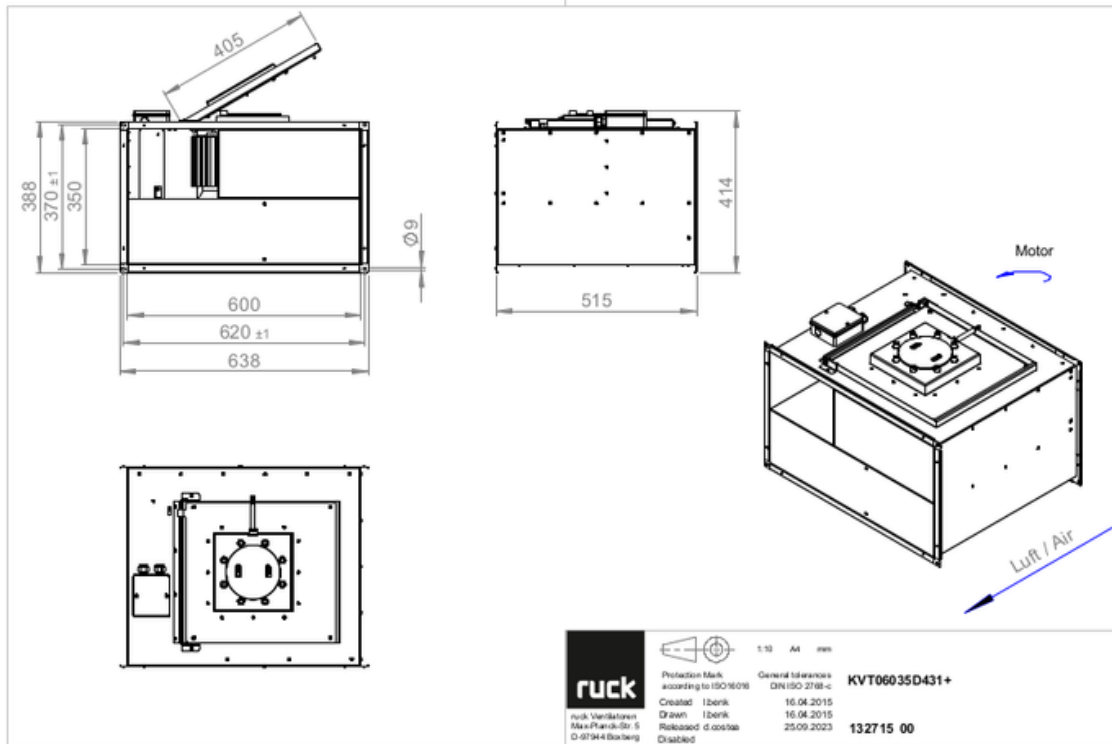

KVT 6035 D4 31

132715

MECHANICAL ACCESSORIES

VS 6035 | 102808



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 6035 | 169684



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 7,5 \text{ kW}$
- Protection class IP 55

TDM 060 | 111557



- 5-step transformer
- $400 \text{ V } 3\sim$, 50/60 Hz

TDS 060 | 113667



- 7-step transformer
- $400 \text{ V } 3\sim$, 50/60 Hz



to the product detail page