


KVT 7040 D4 30


132843

- Forward curved centrifugal fan
- Swing out fan unit
- Housing made of galvanized sheet steel
- Robust three phase AC motor, voltage controllable
- Integrated thermal switch

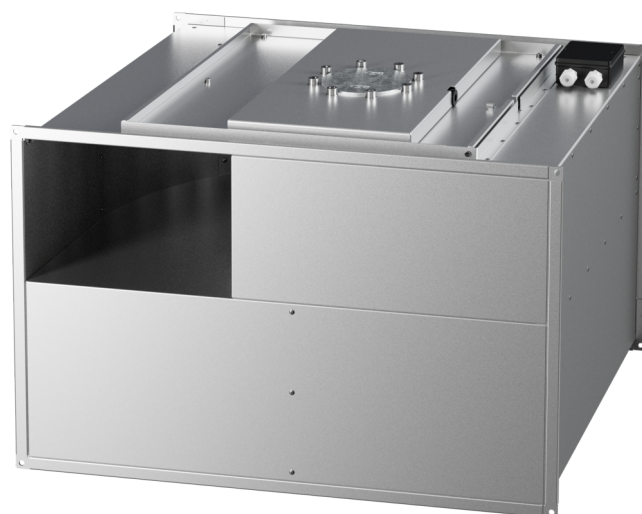

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

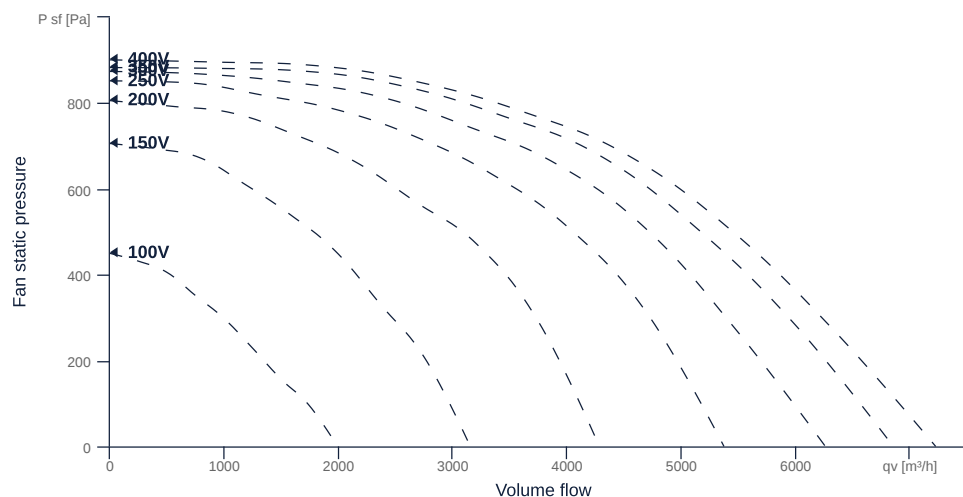

to the product detail page

KVT 7040 D4 30

132843

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	none		
Duct size	700x400		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	10 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	44.9	kg	m
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
------	-------	------	----------------

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	4416	w	P _{ed, max}
Max. operating current (device)	8.88	A	I _{ed, max}
Max. speed	1470	rpm	n _{max}
Max. stat. efficiency	39.6	p	η _{es}
Max. fan efficiency	39.9	p	η _e
Max. flowrate	7210	CmH	q _{v, max}
Max. stat pressure	900	Pa	p _{sf, max}
Max. medium temperature	65	°C	T _{m, max}
Max. environment temperature	65	°C	T _{amb, max}
Min. environment temperature	-30	°C	T _{amb, min}
Min. voltage	100	v	U _{min}



to the product detail page

KVT 7040 D4 30

132843



MOTOR DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAO		protectmotor
Protection class		IP20		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ			wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230		v	Urated, f1
Rated voltage (wiring 2)	400		v	Urated, f2
Rated current	13.75		A	Irated, f1
Rated current (wiring 2)	7.95		A	Irated, f2
Speed	1300		rpm	nf1
Speed (wiring 2)	1300		rpm	nf2
Starting current (wiring 2)	27		A	Istart, f2
Efficiency	39.2		p	ηm, f1
Efficiency (wiring 2)	39.2		p	ηm, f2
Min. temperature	-40		°C	Tmotor, min
UL-Certification motor		None		ULcert



KVT 7040 D4 30

132843

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

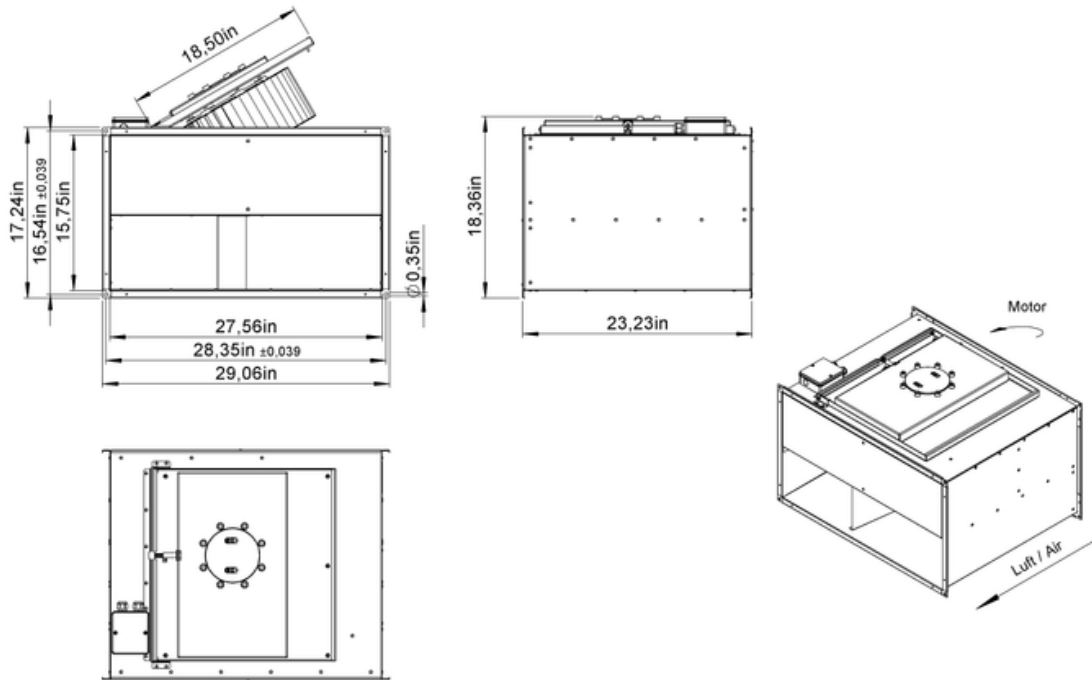

132843 00




to the product detail page

KVT 7040 D4 30

132843


ruck

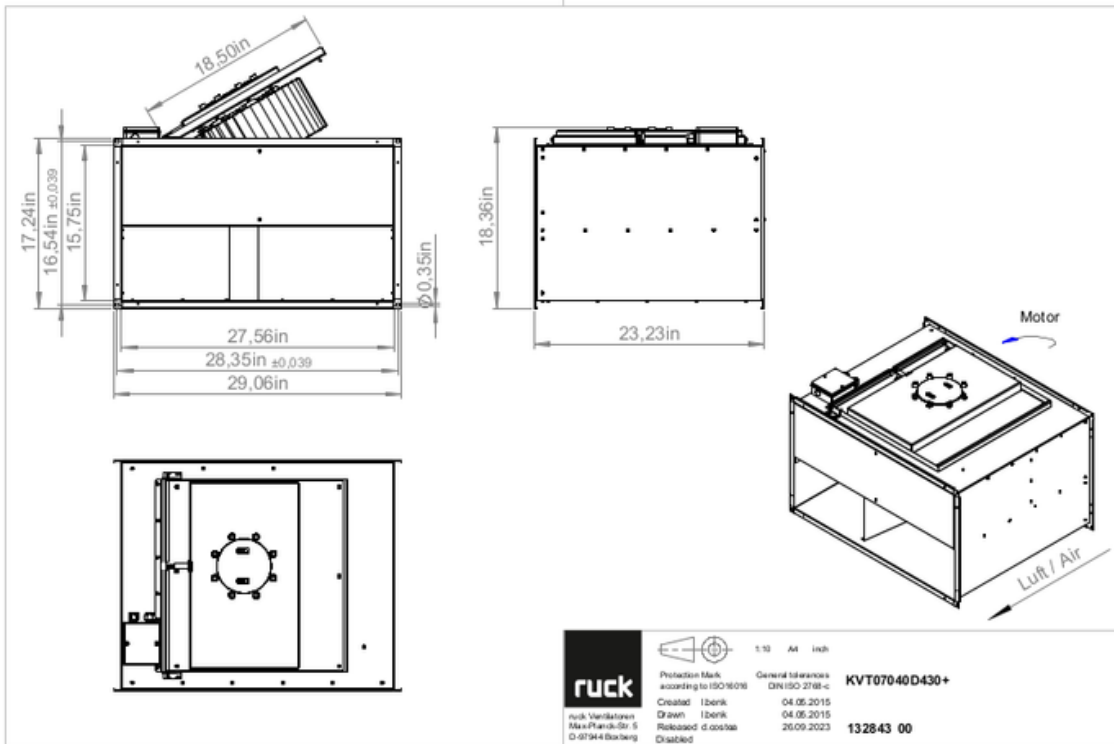

to the product detail page

KVT 7040 D4 30

132843

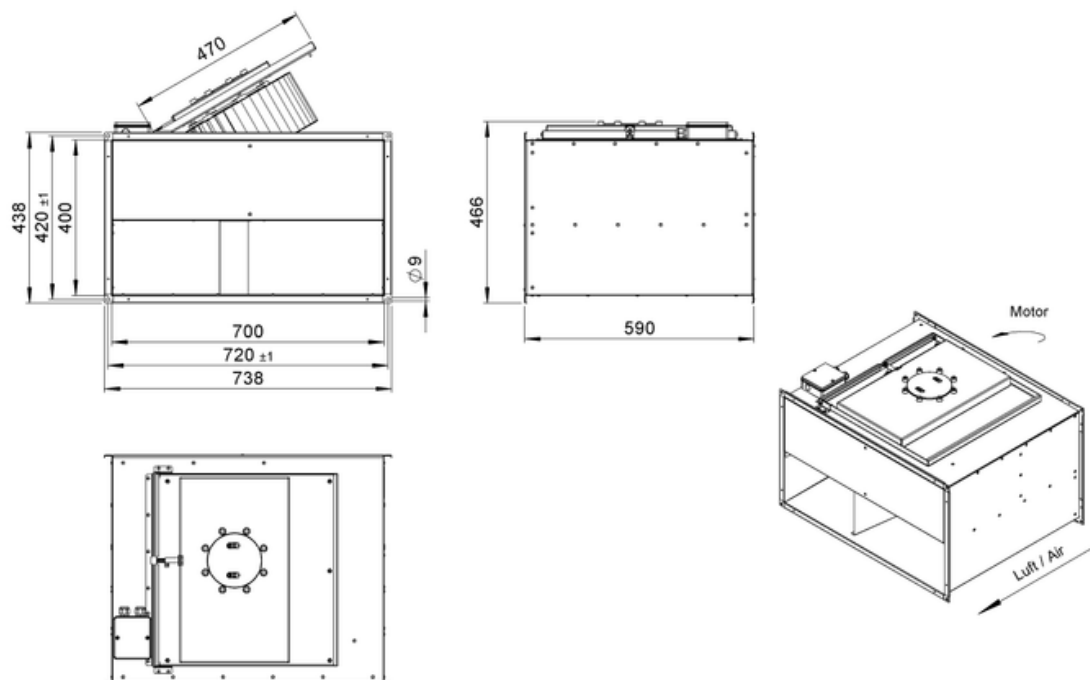



132843 00



to the product detail page

KVT 7040 D4 30

132843

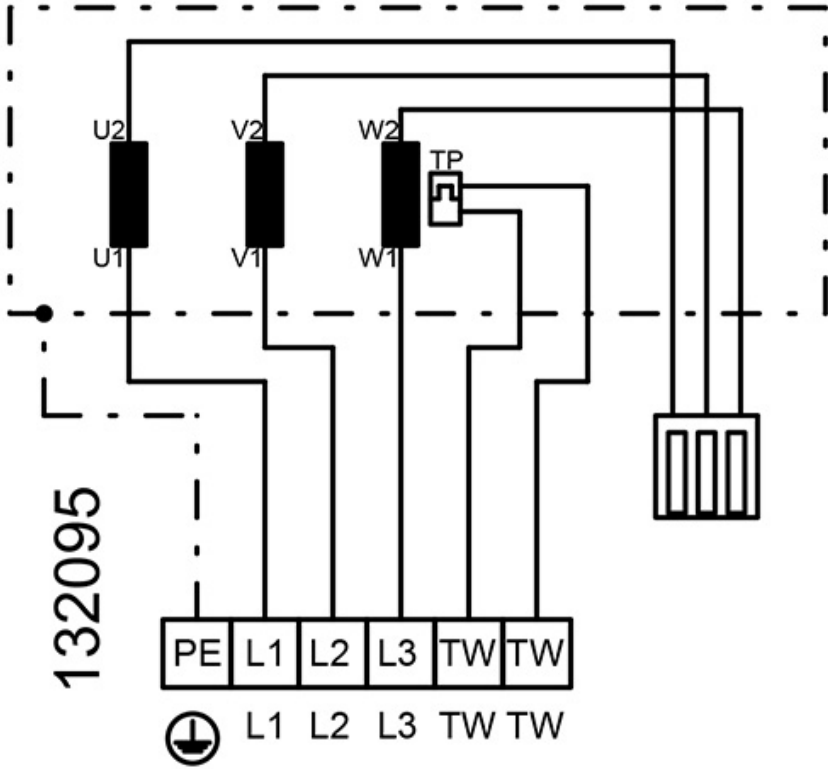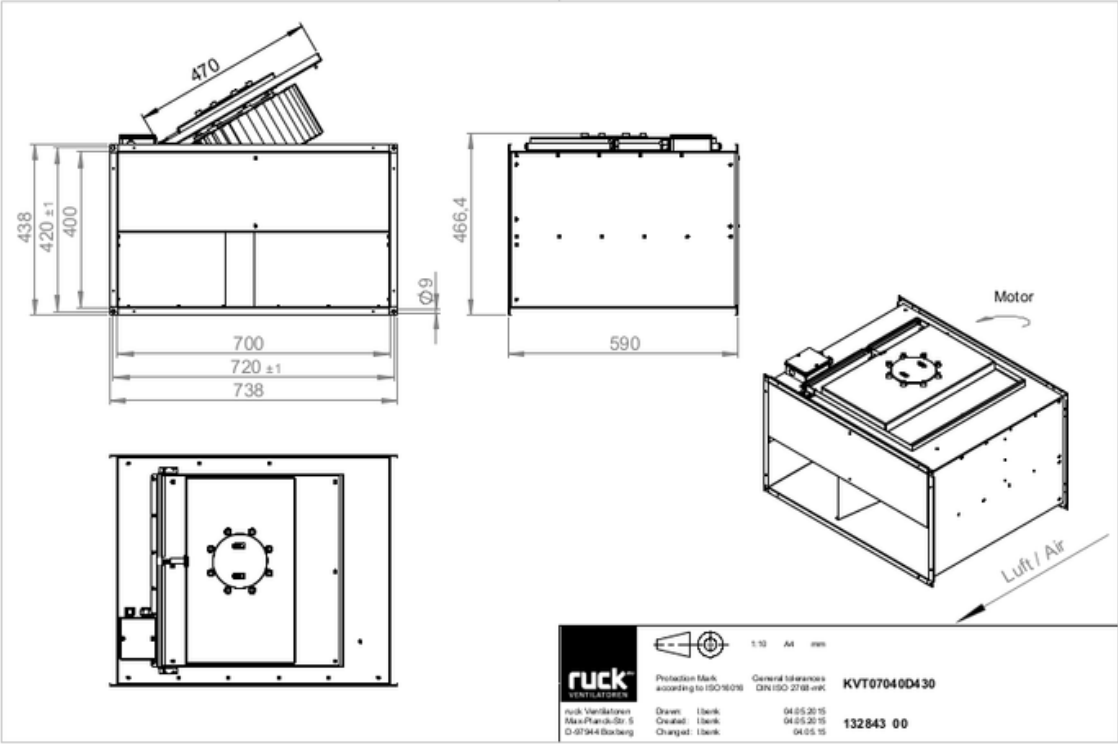

to the product detail page



KVT 7040 D4 30

132843

MECHANICAL ACCESSORIES

VS 7040 | 103951



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 7040 | 169685



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 7,5 \text{ kW}$
- Protection class IP 55

TDM 110 | 111559



- 5-step transformer
- $400 \text{ V } 3\sim$, 50/60 Hz



to the product detail page