


KVT 8050 D4 30


132731

- Forward curved centrifugal fan
- Swing out fan unit
- Housing made of galvanized sheet steel
- Robust three phase AC motor, voltage controllable
- Integrated thermal switch

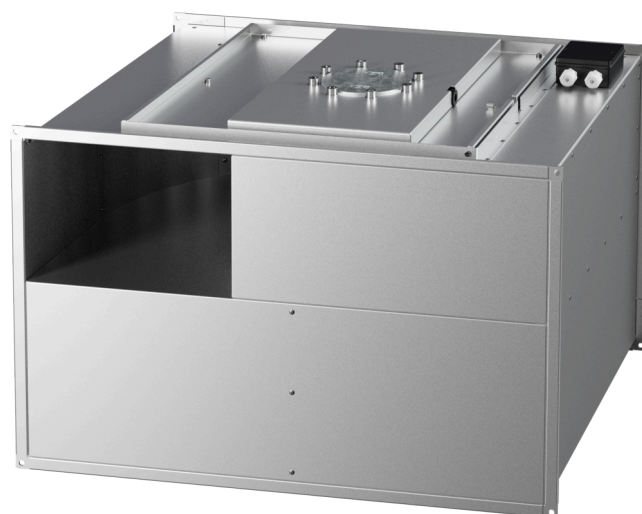

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

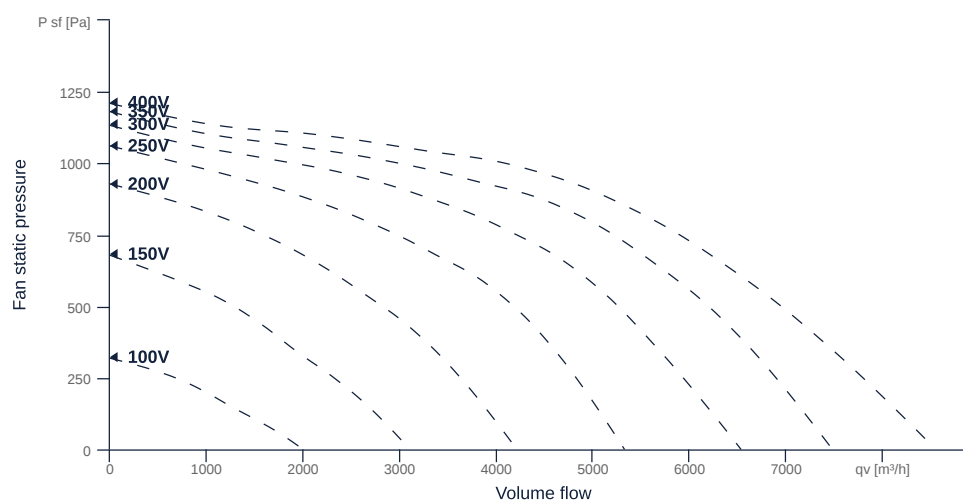

to the product detail page

KVT 8050 D4 30

132731

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	none		
Duct size	800x500		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	400	v	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	10 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	61.4	kg	m
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
------	-------	------	----------------

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	6515	w	P _{ed, max}
Max. operating current (device)	8.6	A	I _{ed, max}
Max. speed	1445	rpm	n _{max}
Max. stat. efficiency	40	p	η _{es}
Max. fan efficiency	40.2	p	η _e
Max. flowrate	6900	CmH	q _{v, max}
Min. stat pressure	500	Pa	p _{sf, min}
Max. stat pressure	1210	Pa	p _{sf, max}
Max. medium temperature	40	°C	T _{m, max}
Max. environment temperature	40	°C	T _{amb, max}
Min. environment temperature	-30	°C	T _{amb, min}
Min. voltage	100	v	U _{min}



KVT 8050 D4 30

132731




MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAO		protectmotor
Protection class		IP20		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ			wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230		v	Urated, f1
Rated voltage (wiring 2)	400		v	Urated, f2
Rated current	14.7		A	Irated, f1
Rated current (wiring 2)	8.5		A	Irated, f2
Speed	1210		rpm	nf1
Speed (wiring 2)	1210		rpm	nf2
Starting current	30		A	Istart, f1
Starting current (wiring 2)	17		A	Istart, f2
Efficiency	43.1		p	ηm, f1
Efficiency (wiring 2)	43.1		p	ηm, f2
Min. temperature	-40		°C	Tmotor, min
UL-Certification motor		None		ULcert




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

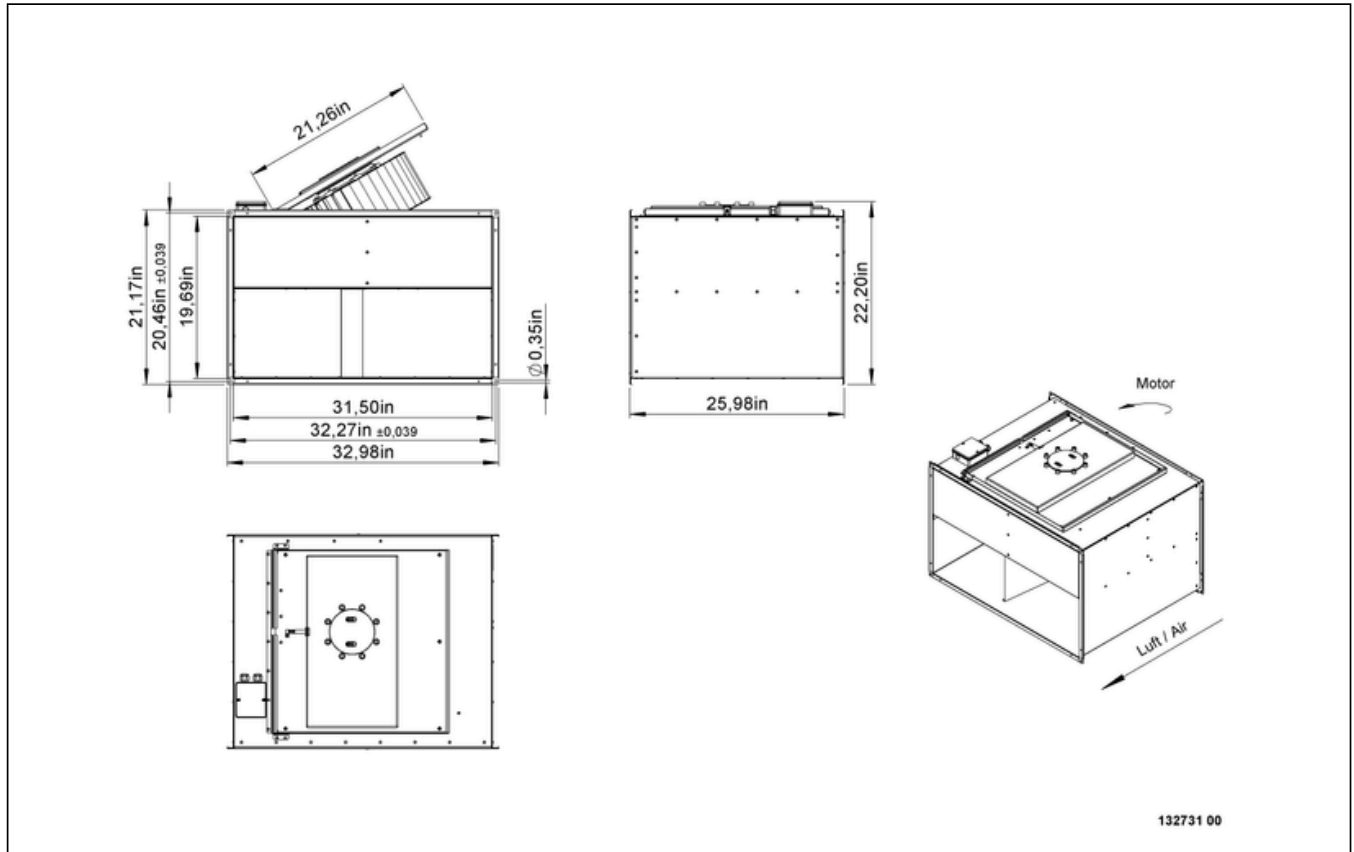

KVT 8050 D4 30

132731


ruck

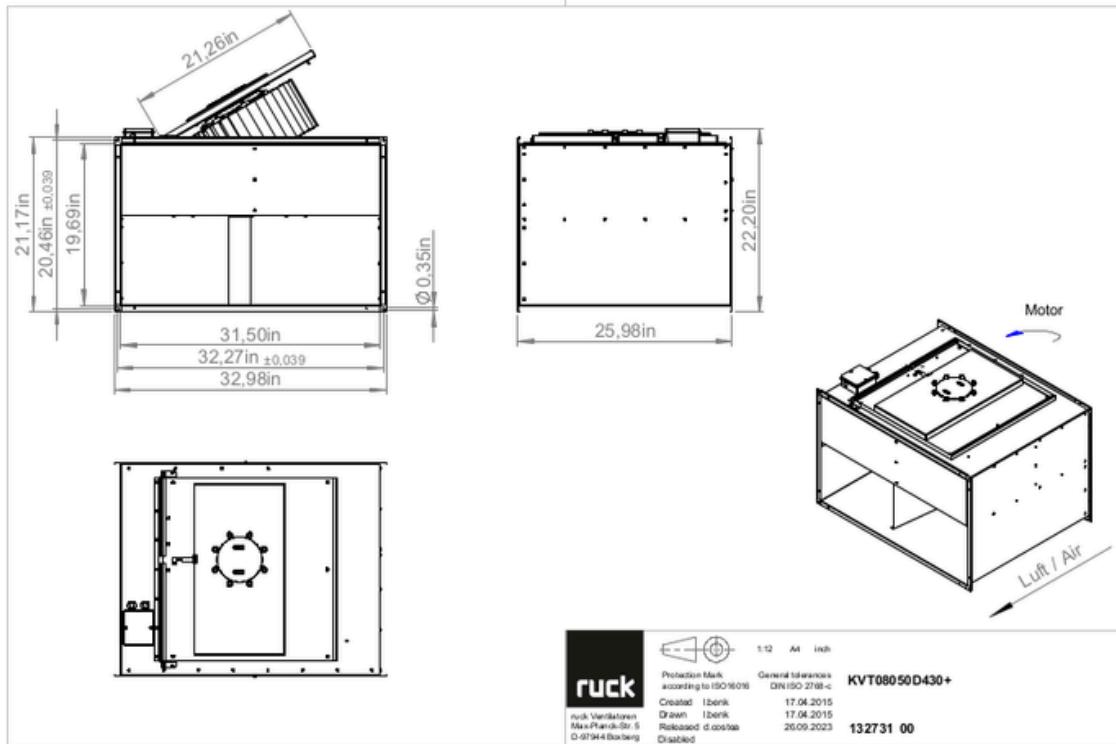

to the product detail page

KVT 8050 D4 30

132731

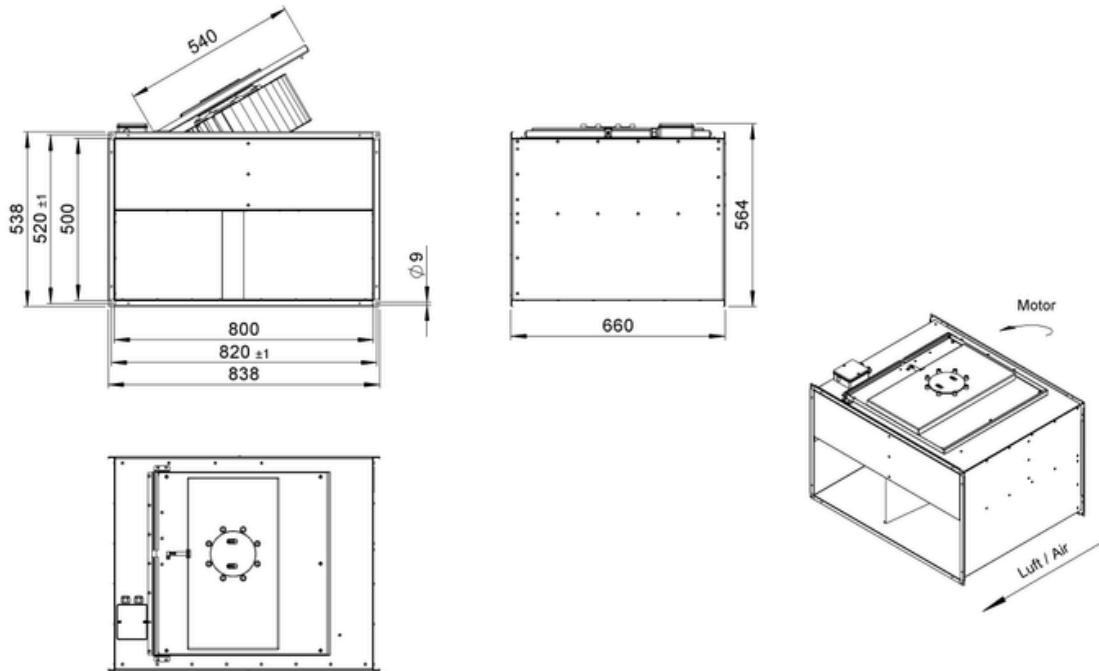



132731 00



to the product detail page

KVT 8050 D4 30

132731

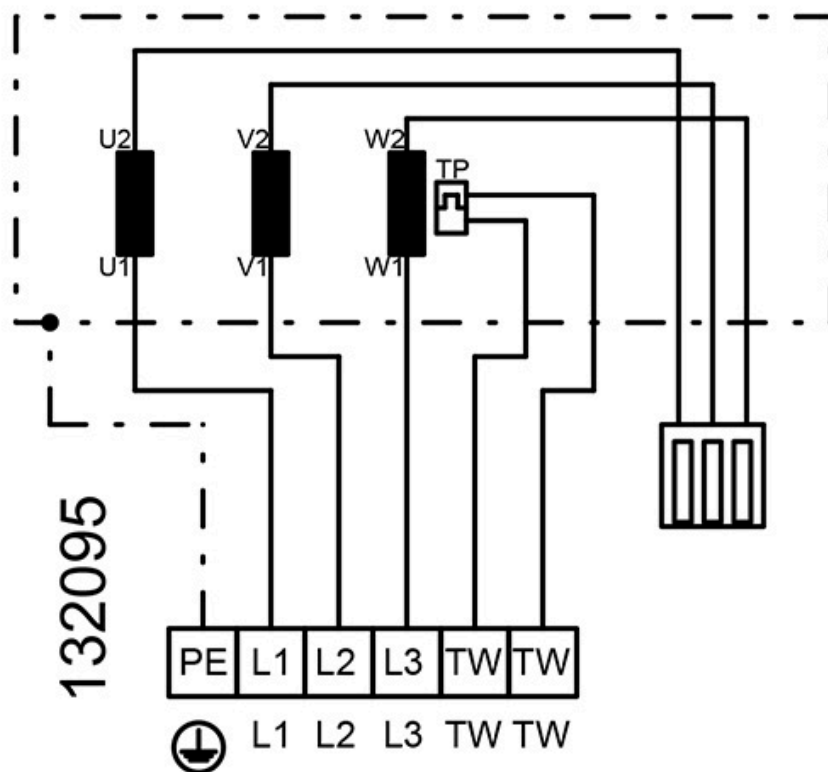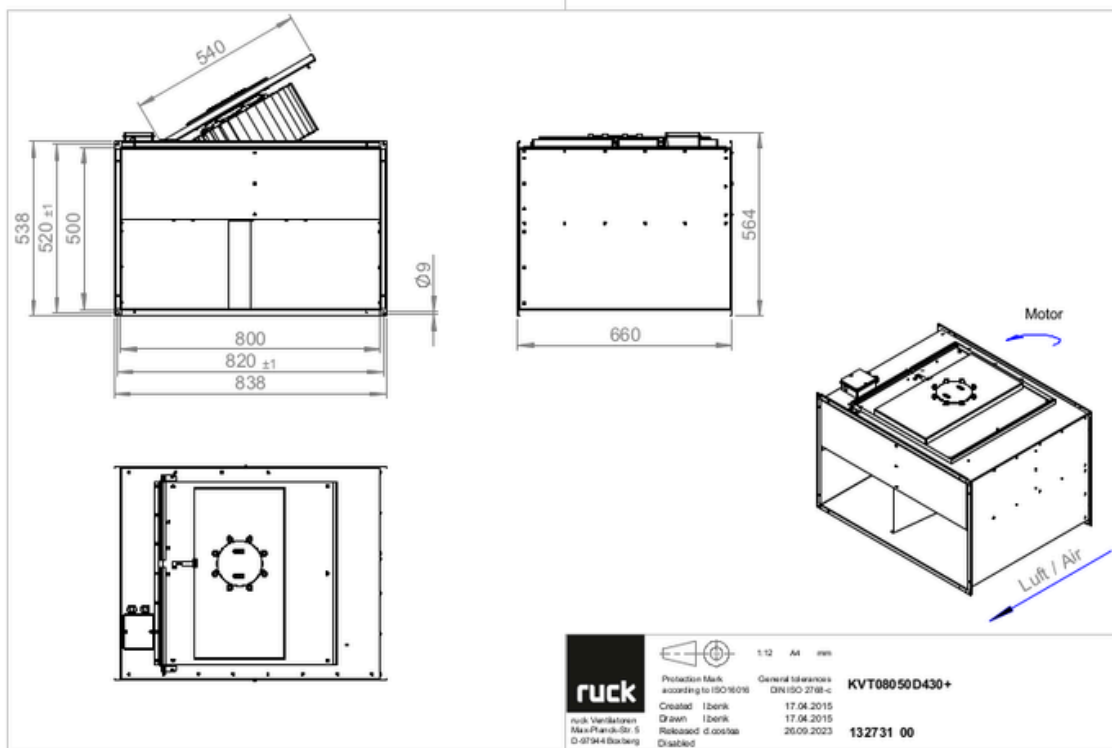

to the product detail page

KVT 8050 D4 30

132731

MECHANICAL ACCESSORIES

VS 8050 | 103953



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

VKK 8050 | 169686



- Automatic shutter
- Plastic, weather resistant
- Temperature resistant up to 70 °C

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 7,5 \text{ kW}$
- Protection class IP 55



to the product detail page