

RS 200L


130361

- Compact centrifugal fan
- Backward curved impeller
- Sheet steel housing, RAL 7035, powder coated
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 55 °C in continuous operation
- Integrated thermal switch



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

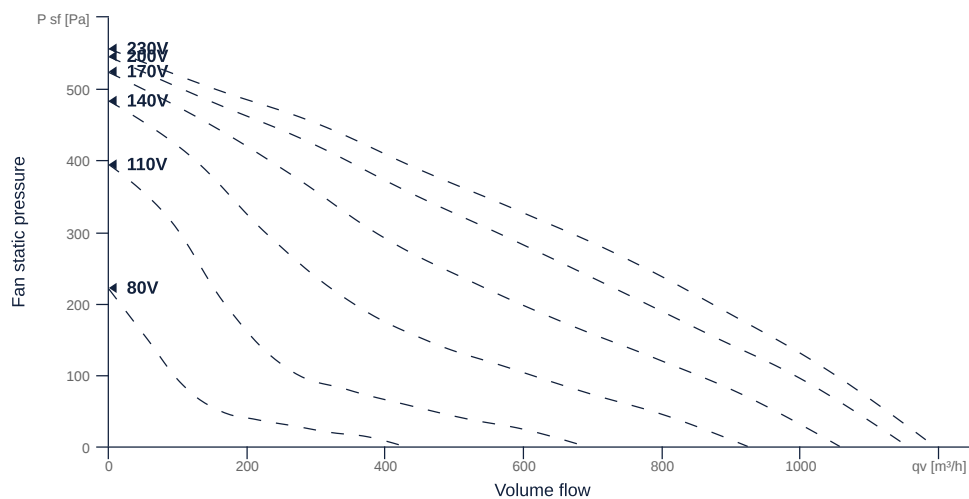

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	none		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN200		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	5.1	kg	m
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
------	-------	------	----------------

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	188	251	w	P _{ed, max}
Max. operating current (device)	0.9	1.17	A	I _{ed, max}
Max. speed	2820	3290	rpm	n _{max}
Max. stat. efficiency	27.9	25	p	η _{es}
Max. fan efficiency	29.7	26.6	p	η _e
Max. flowrate	1190	1310	CmH	q _{v, max}
Max. stat pressure	550	745	Pa	p _{sf, max}
Max. medium temperature	55	70	°C	T _{m, max}
Max. environment temperature	55	70	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	v	U _{min}
Stall current	1.75	1.75	A	I _{LRA}



to the product detail page

MOTOR DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP33		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		5	μF	Ccond
Voltage capacitor		400	v	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230	230	v	Urated, f1
Rated current	0.88	1.14	A	Irated, f1
Speed	2525	2730	rpm	nf1
Starting current	1.75	1.75	A	Istart, f1
Efficiency	40.1	36.1	p	ηm, f1
Min. temperature	-30		°C	Tmotor, min
Cos Phi	0.980000	0.000000		cos φ
UL-Certification motor		None		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass


[to the product detail page](#)


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

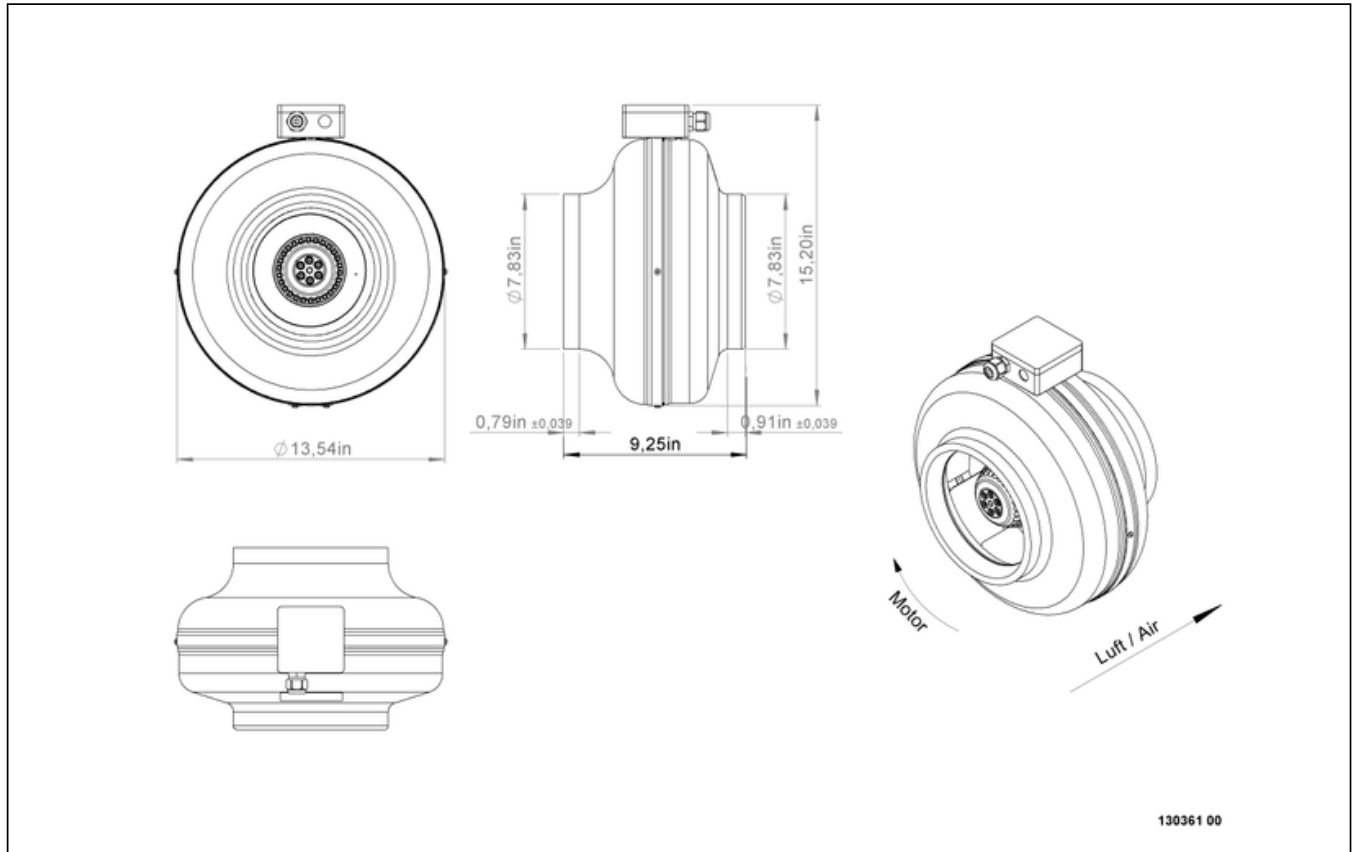

RS 200L

130361

ruck

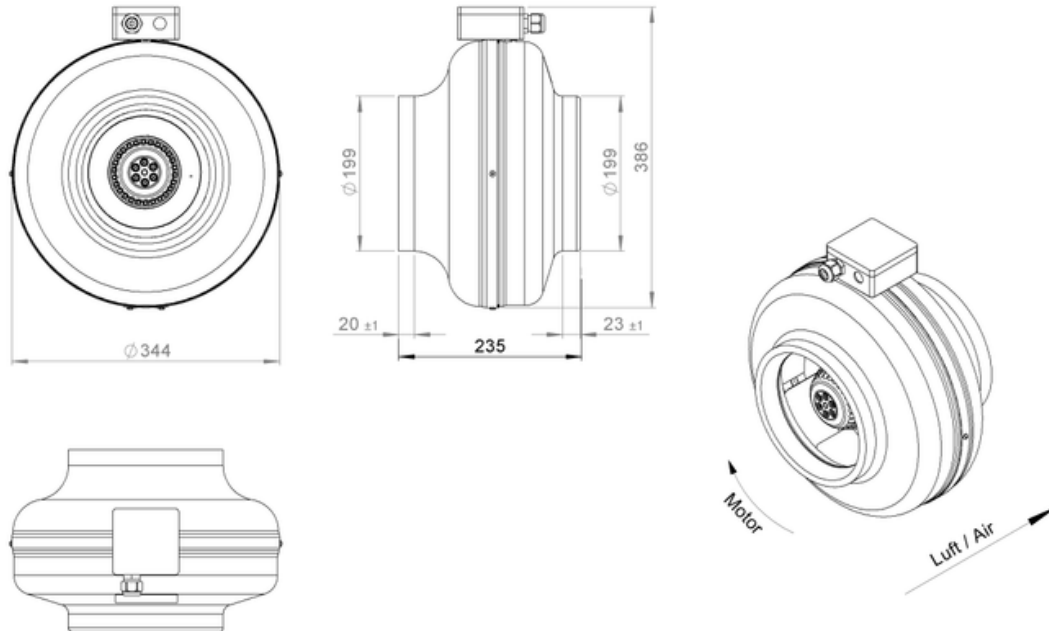


130361 00



to the product detail page


RS 200L
130361

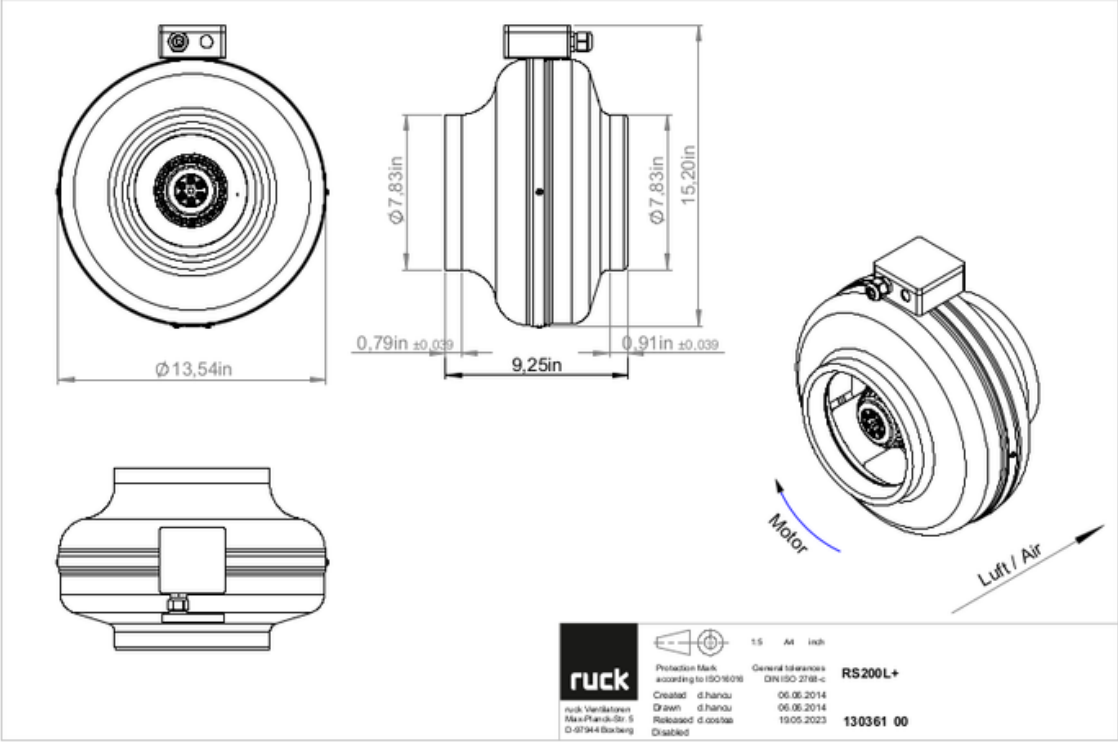


to the product detail page

RS 200L

130361

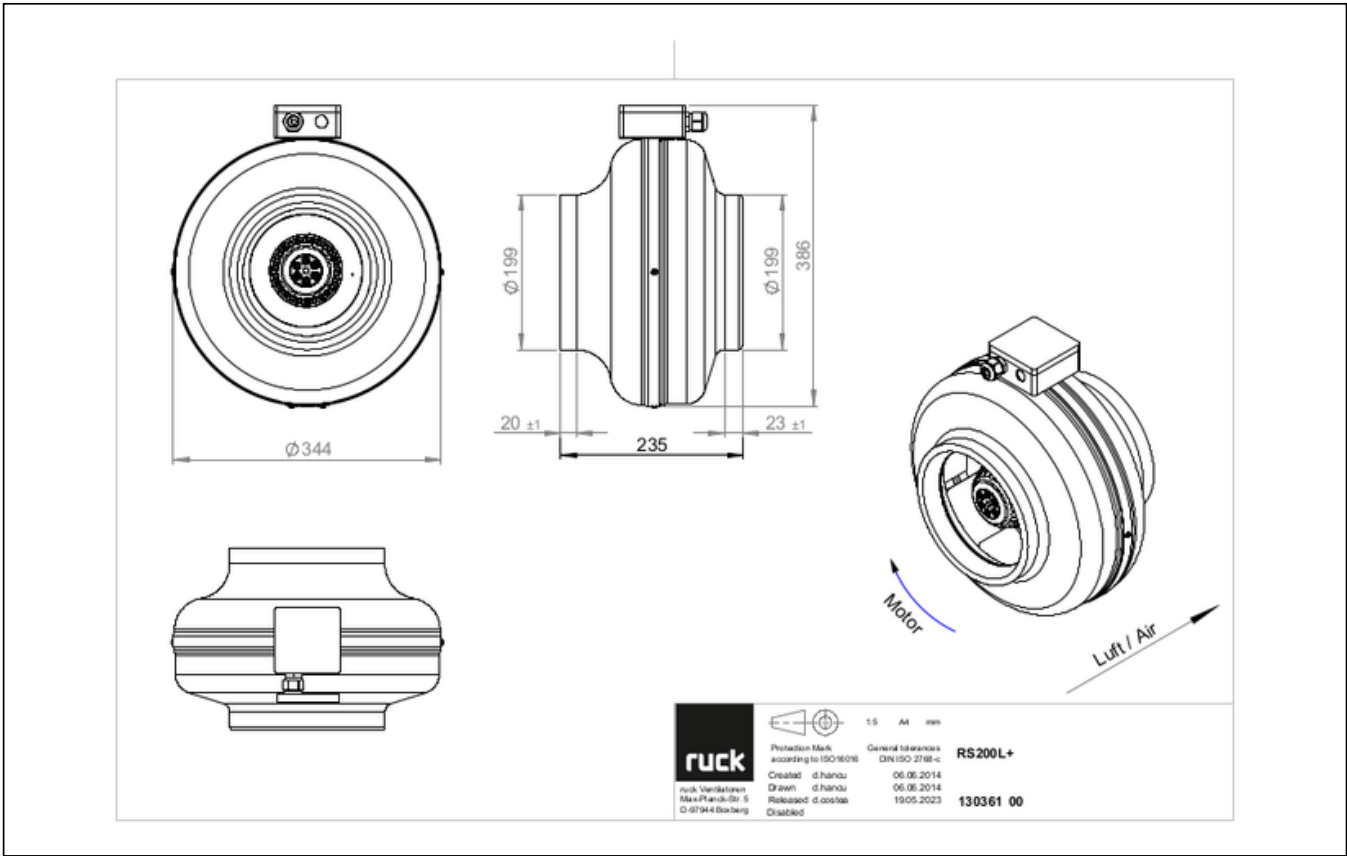

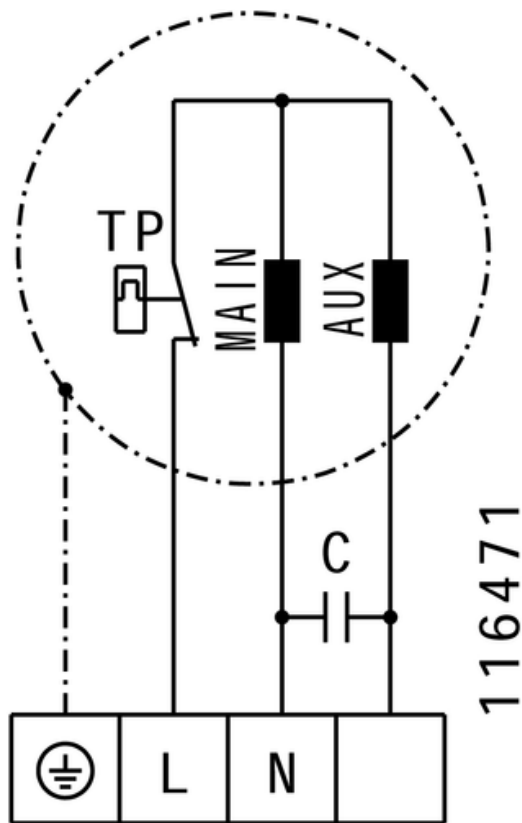

MECHANICAL ACCESSORIES

VM 200 | 102650



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

RSK 200 | 102662




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

MRS 2 | 110095




- Mounting bracket
- Galvanized steel sheet
- Includes: Mounting bracket and 2 Phillips screws (6 x 45 mm), 2 dowels (8 x 40 mm)

FV 200 | 112832



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 200 | 112840



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 200 | 112853




- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 200D | 113487



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

SG 200 01 | 169589



- Protection grille for tube connection
- Galvanized wire

SDS 200 | 169606



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 200 | 169643



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm



ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400\text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 7,5 kW
- $I_{max} = 25\text{ A}$

MTY 1 | 103428



- Electronic controller
- Stepless
- 230 V ~, 50 Hz
- Max. ambient temperature 35 °C
- $I_{max} = 1\text{ A}$
- Surface and flush mounting

ETY 15 | 115891



- Electronic controller
- Stepless speed control
- 230 V ~, 50 Hz, 2,5 A
- Max. ambient temperature 35 °C

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz

TES 0145 | 169581



- Step transformer
- 230 V ~, 50/60 Hz

