

RS 250 EC K 01


154639

- Compact centrifugal fan
- Backward curved impeller
- Sheet steel housing, RAL 7035, powder coated
- High efficiency EC motor, steplessly controllable
- Internal electronic temperature monitoring
- Incl. 1x potentiometer for connection in terminal box



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

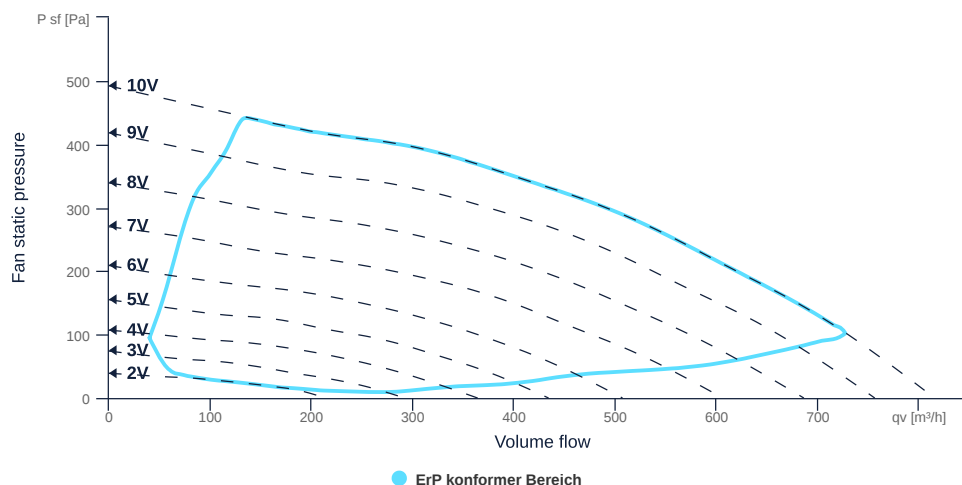

to the product detail page

RS 250 EC K 01

154639

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	3.77	kg	m
Nominal air flow rate, nominal point m³/h	727.2	CmH	q _{v,nom}
Nominal external pressure, static	102	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	B		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.2	CmS	q _{v,nom}
Actual electrical input power, nominal point	0.08	kw	P _{e,nom}
Face velocity, nominal point	4.11	mps	v _{nom}
Nominal external pressure, static	102	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	26.32	p	η _{es,EHA}
Highest external air leakage rate	0.25	p	
Enclosure sound level, nominal point	55.79	db	LWA2
Rating	Product is compliant 2018		



RS 250 EC K 01

154639

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	90	90	w	P _{ed, max}
Max. operating current (device)	0.81	0.81	A	I _{ed, max}
Max. speed	2895	2895	rpm	n _{max}
Max. stat. efficiency	42.4	42.4	p	η _{es}
Max. fan efficiency	43	43	p	η _e
Max. flowrate	815	815	CmH	Q _{v, max}
Max. stat pressure	490	490	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230	230	v	U _{rated, f1}
Rated current	0.89	0.89	A	I _{rated, f1}
Speed	2908	2908	rpm	n _{f1}
Efficiency	48.7	48.7	p	η _{m, f1}
Min. temperature	-30	-30	°C	T _{motor, min}
Cos Phi	0.550000	0.550000		cos φ
UL-Certification motor		None		UL _{cert}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

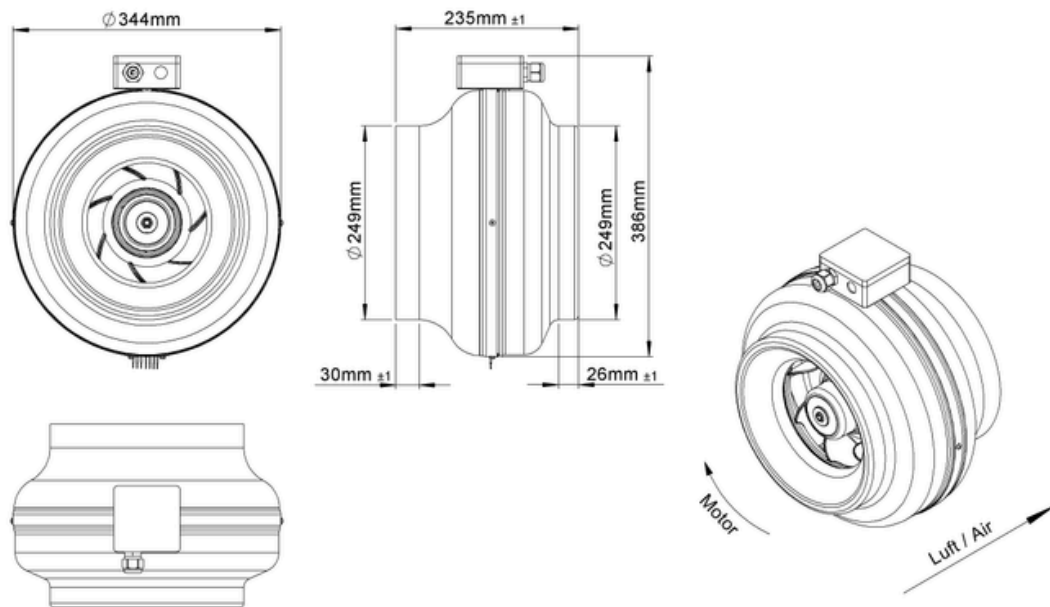


154639 00



RS 250 EC K 01

154639

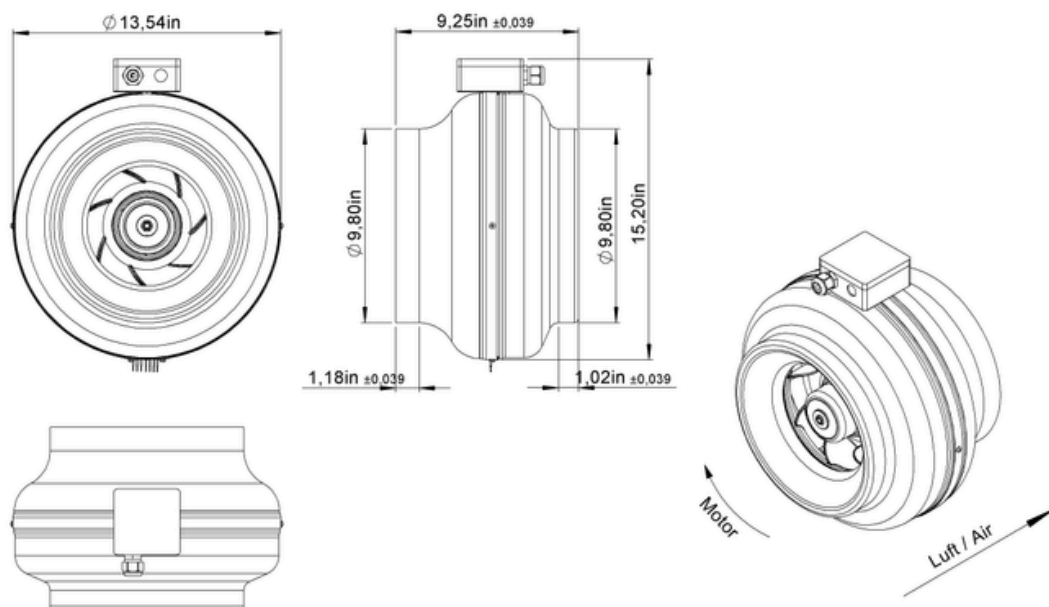


154639 00



to the product detail page

RS 250 EC K 01


154639

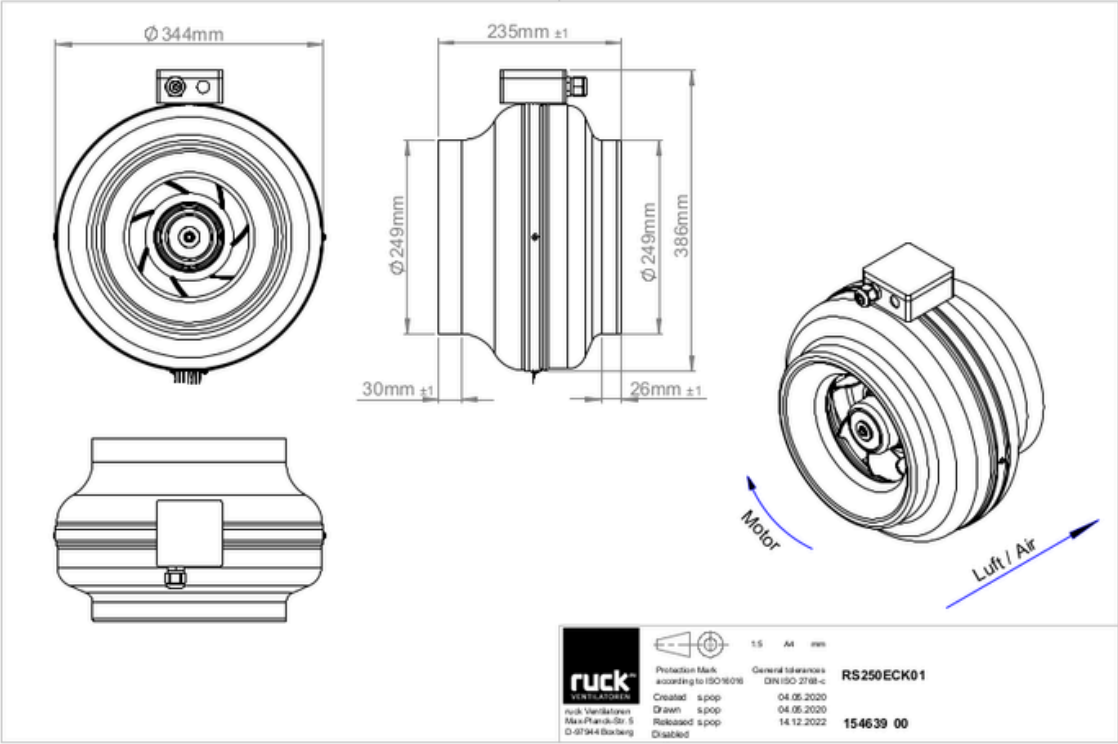

to the product detail page

RS 250 EC K 01


154639

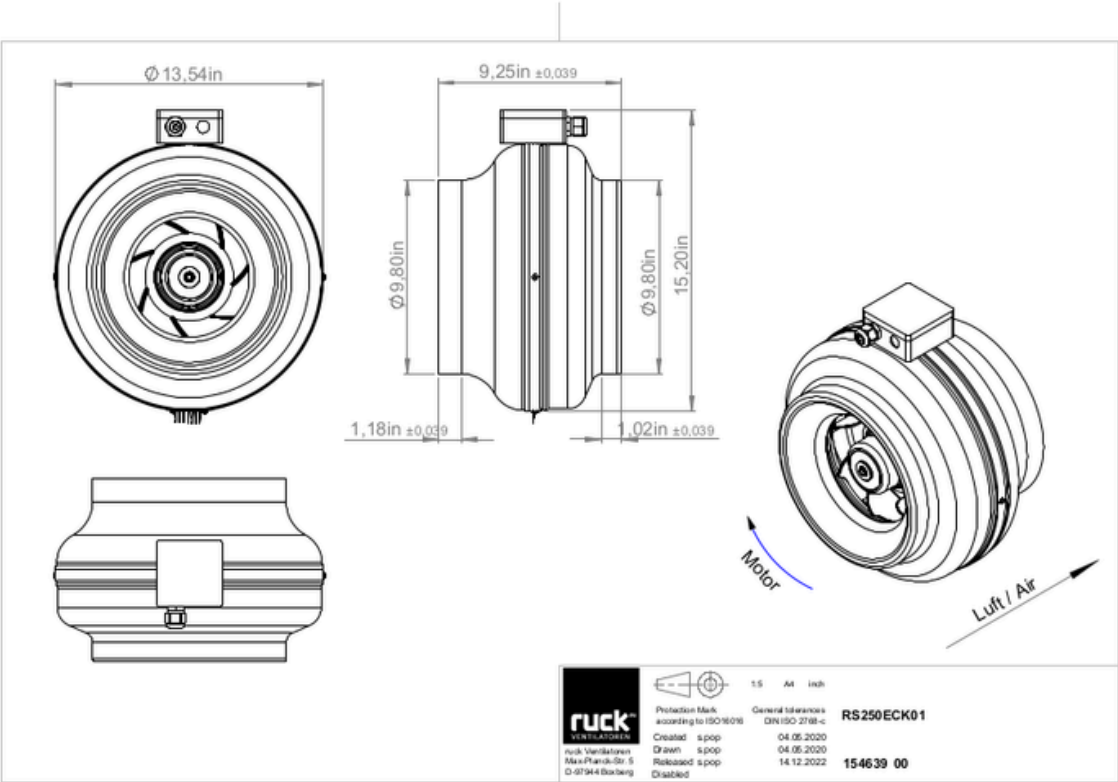

to the product detail page

RS 250 EC K 01

154639

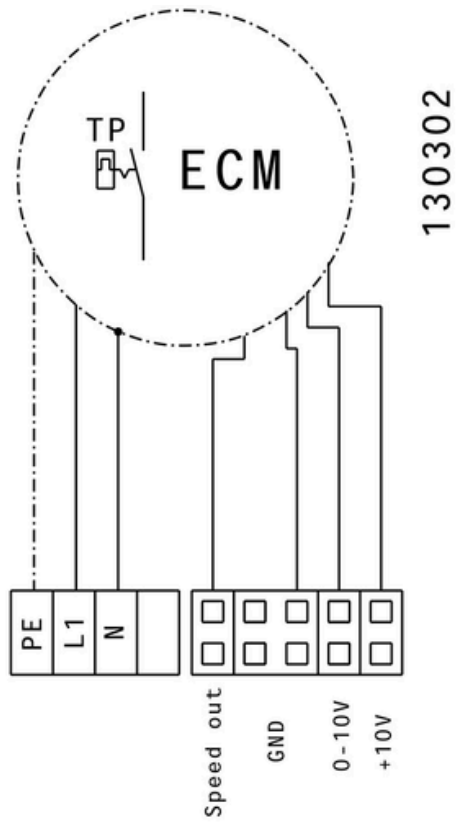

to the product detail page

MECHANICAL ACCESSORIES

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

RSK 250 | 102686




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

MRS 2 | 110095




- Mounting bracket
- Galvanized steel sheet
- Includes: Mounting bracket and 2 Phillips screws (6 x 45 mm), 2 dowels (8 x 40 mm)

FV 250 | 112833



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 250 | 112845



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 250 | 112854



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 250D | 113488



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

KWR 250 01 | 124065




- Cold water cooler, uninsulated
- Version right
- Connection ND 250
- Galvanized steel sheet with condensate tray

KWR 250 02 | 124066



- Cold water cooler, uninsulated
- Version left
- Connection ND 250
- Galvanized steel sheet with condensate tray

SG 250 01 | 169588



- Protection grille for tube connection
- Galvanized wire

SDF 250 | 169644



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

SDS 250 | 169607



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 7,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

