

RS 315L EC


131515

- Compact centrifugal fan
- Backward curved impeller
- Sheet steel housing, RAL 7035, powder coated
- High efficiency EC motor, steplessly controllable
- Internal electronic temperature monitoring
- Incl. 1x potentiometer for connection in terminal box



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

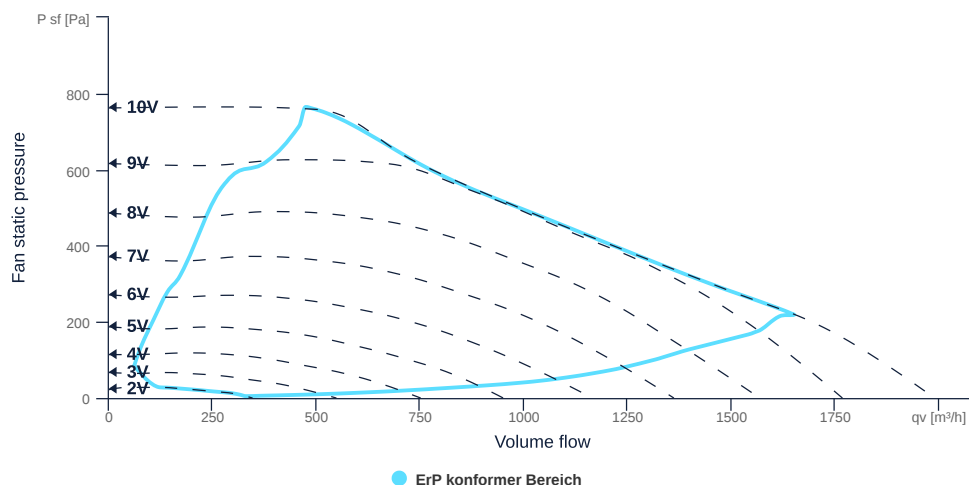

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN315		DN
Rated voltage (entire device)	230	v	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX3		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	6	kg	m
Nominal air flow rate, nominal point m³/h	856.8	CmH	q _{V,nom}
Nominal external pressure, static	320	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.24	CmS	q _{V,nom}
Actual electrical input power, nominal point	0.15	kw	P _{e,nom}
Face velocity, nominal point	3.1	mps	V _{nom}
Nominal external pressure, static	320	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	61	p	η _{es,SUP}
Highest external air leakage rate	1.83	p	
Enclosure sound level, nominal point	80	db	LWA2
Rating	Product is compliant 2018		



to the product detail page

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	270	270	w	P _{ed, max}
Max. operating current (device)	1.89	1.89	A	I _{ed, max}
Max. speed	2950	2950	rpm	n _{max}
Max. stat. efficiency	47.5	47.5	p	η _{es}
Max. fan efficiency	48.2	48.2	p	η _e
Max. flowrate	1990	1990	CmH	Q _{v, max}
Max. stat pressure	760	760	Pa	p _{sf, max}
Max. medium temperature	65	65	°C	T _{m, max}
Max. environment temperature	65	65	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protect _{motor}
Protection class		IP30		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230	230	v	U _{rated, f1}
Rated current	1.74	1.74	A	I _{rated, f1}
Speed	2547	2547	rpm	n _{f1}
Efficiency	52	52	p	η _{m, f1}
Min. temperature	-30	-30	°C	T _{motor, min}
Cos Phi	0.680000	0.680000		cos φ
UL-Certification motor		None		UL _{cert}


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		F _{class}



to the product detail page

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

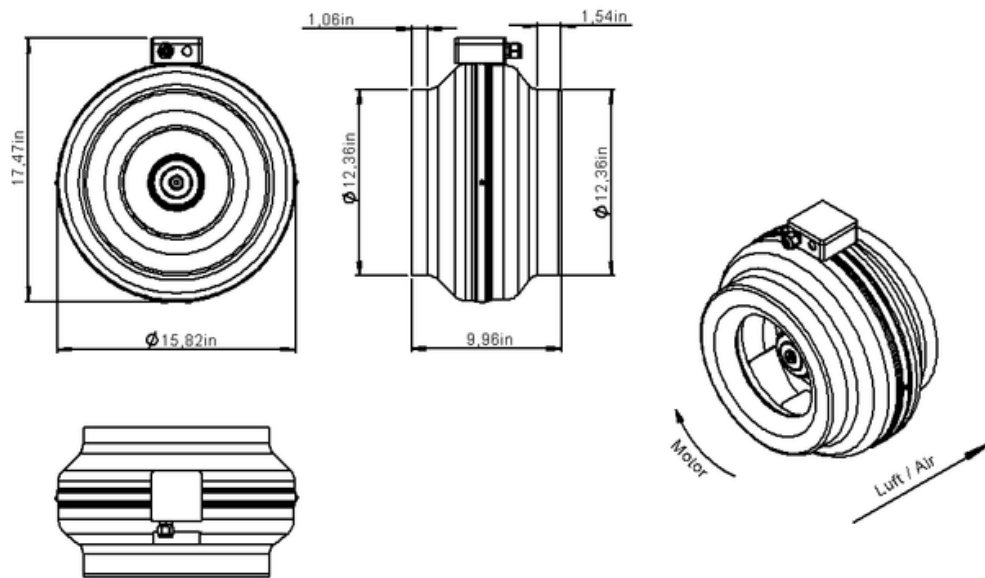


131515 00



RS 315L EC

131515

ruck

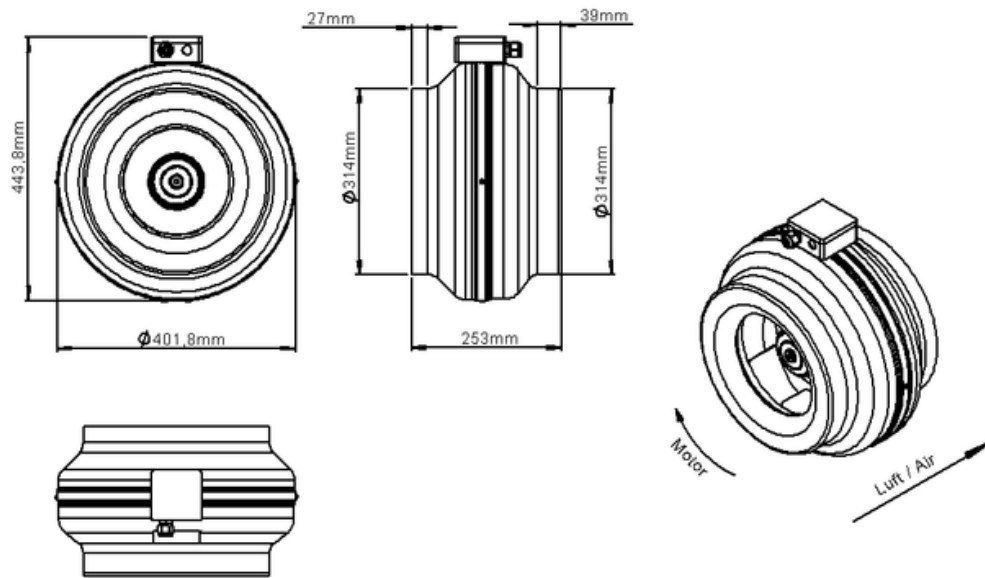

131515 00




to the product detail page

RS 315L EC


131515

ruck

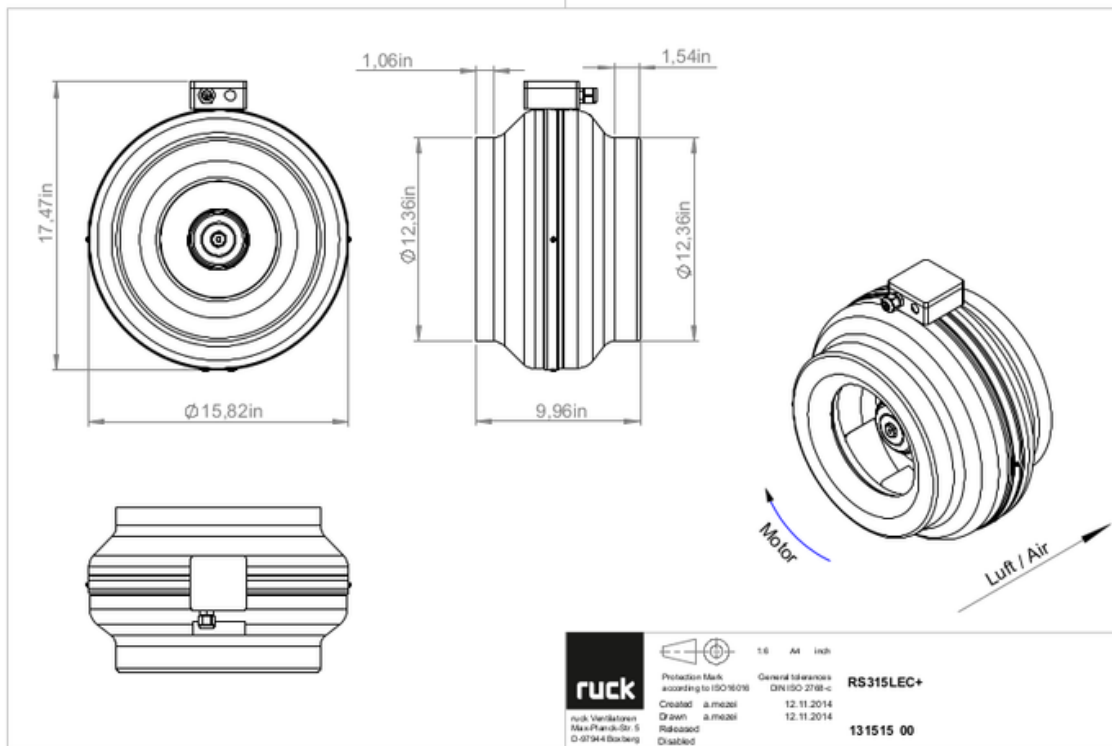

to the product detail page


RS 315L EC
131515

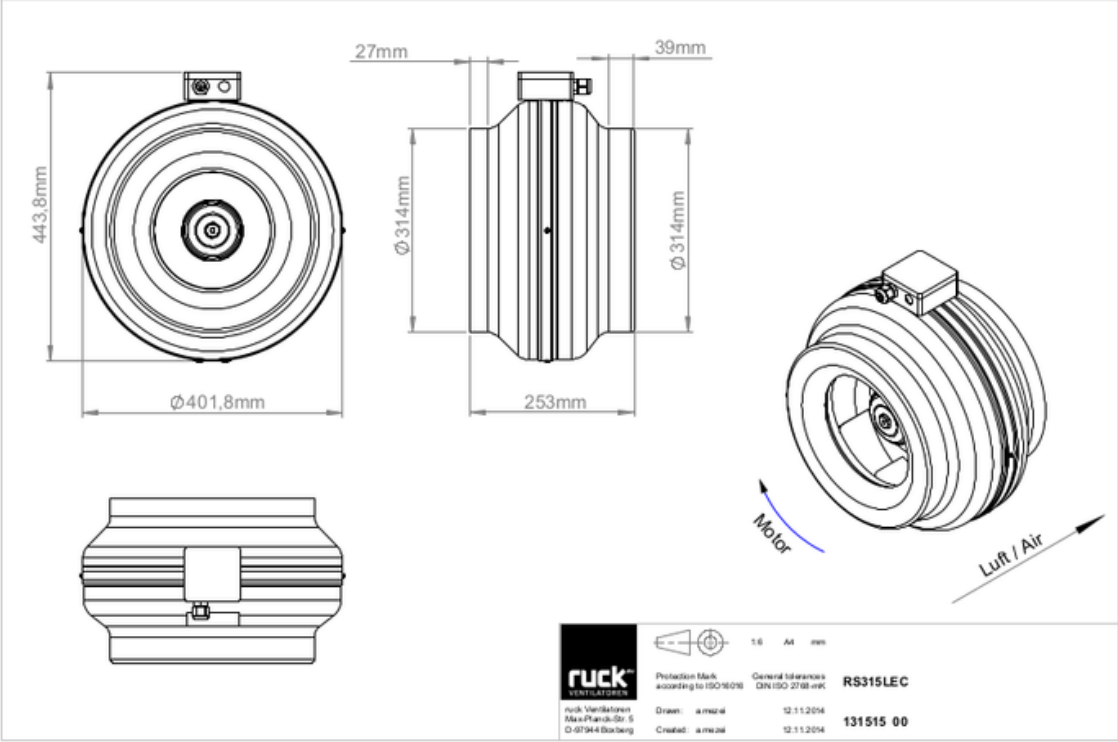

to the product detail page

RS 315L EC

131515

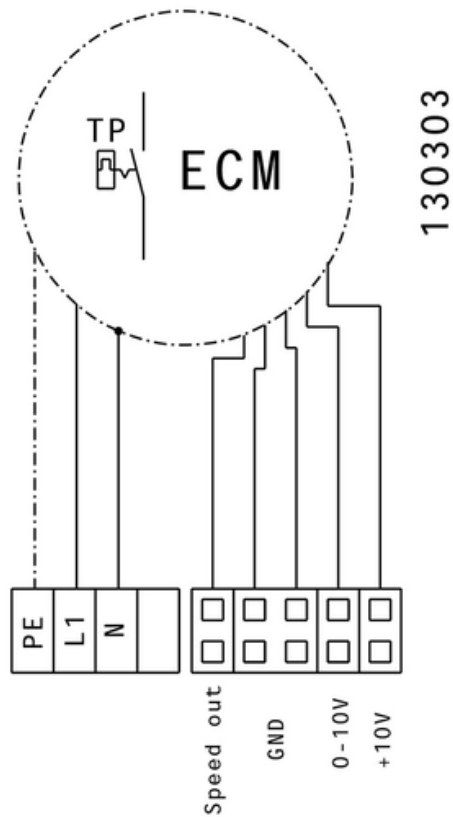

to the product detail page

MECHANICAL ACCESSORIES

VM 315 | 102652



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm Neopren gasket
- 1 Pack = 2 pieces

RSK 315 | 102664




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

MRS 2 | 110095



- Mounting bracket
- Galvanized steel sheet
- Includes: Mounting bracket and 2 Phillips screws (6 x 45 mm), 2 dowels (8 x 40 mm)

FV 315 | 112834



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 315 | 112846



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 315 | 112855




- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 315D | 113489



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

SG 315 01 | 169592



- Protection grille for tube connection
- Galvanized wire

SDS 315 | 169609



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 315 | 169645



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 7,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

MTP 50 | 168752



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

